FIG.1-DERATING CURVE FOR OUTPUT RCTIFIER CURRENT

FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

FIG.4- TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER BRIDGE ELEMENT

FIG.5-TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT
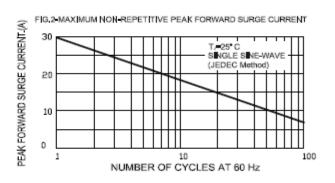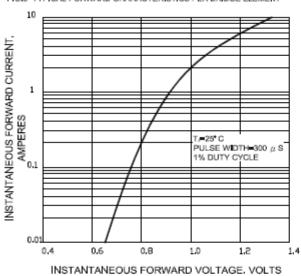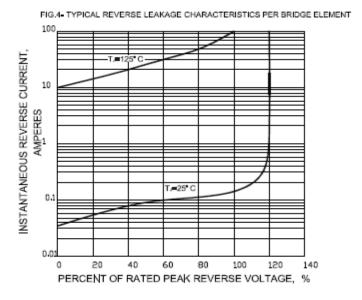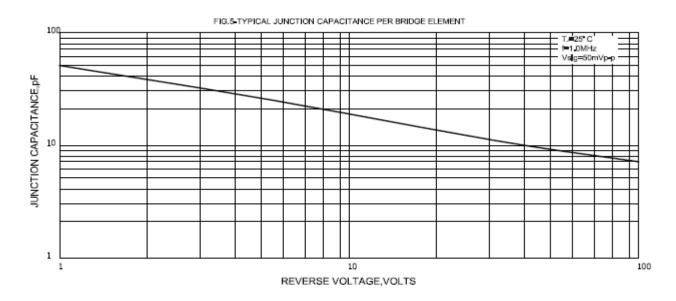
Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

DB

0.255(6.5) / 0.245(6.2)   0.315(8.00) / 0.285(7.24)

0.335(8.51) / 0.320(8.12)

0.105(2.69) / 0.086(2.19)

0.045(1.14) / 0.035(0.89)

0.023(0.58) / 0.018(0.46)

0.205(5.2) / 0.195(5.0)

0.080(2.03) / 0.050(1.27)

0.185(4.69) / 0.150(3.81)

0.075(1.90) / 0.065(1.39)

0.013(3.3) / 0.0086(0.22)

0.350(8.9) / 0.300(7.6)

Dimensions in inches and (millimeters)