
ECS-3518/3525 SMD Clock Oscillator

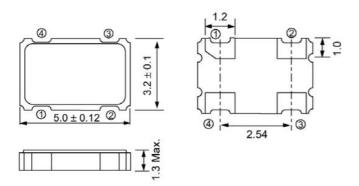

Package Dimensions (mm)






Figure 2) Land Pattern

Figure 1) Top, Side, and Bottom views

Pad Connections		
#1	Tri-State	
#2	Ground	
#3	Output	
#4	VCC	

Tri-State Control Voltage		
Pad 1	Pad 3	
Open	Oscillation	
1 Level	Oscillation	
0 Level	High Impedance	

Frequency Abbreviations

FREQUENCY MHz	CODE
4.000	040
8.000	080
10.000	100
12.000	120
14.31818	143
24.000	240
32.000	320
33.333	333
40.000	400
48.000	480
50.000	500
60.000	600
64.000	640
66.666	666
80.000	800
100.000	1000
125.000	1250




Figure 3) Suggested Reflow Profile



ECS-3518/3525 SMD Clock Oscillator



Tape Dimensions (mm)




Figure 4) Pocket Tape Dimensions

Package Data		
Item	Description	
Lid	Metal	
Base	Ceramic	
Sealing	Seam Weld	
Terminal	Tungsten (Metalized)	
Plating	Gold/Nickel (Surface)/(Under)	
RoHS	Compliant (PbFree)	
MSL	1	