

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G,  
MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**

**MAXIMUM RATINGS**

| Rating                                                                                                                        | Symbol         | Max           | Unit                     |
|-------------------------------------------------------------------------------------------------------------------------------|----------------|---------------|--------------------------|
| Collector–Emitter Voltage<br>MJD31, NJVMJD31T4G, MJD32, NJVMJD32T4G<br>MJD31C, NJVMJD31CT4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G | $V_{CEO}$      | 40<br>100     | Vdc                      |
| Collector–Base Voltage<br>MJD31, NJVMJD31T4G, MJD32, NJVMJD32T4G<br>MJD31C, NJVMJD31CT4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G    | $V_{CB}$       | 40<br>100     | Vdc                      |
| Emitter–Base Voltage                                                                                                          | $V_{EB}$       | 5             | Vdc                      |
| Collector Current<br>Continuous<br>Peak                                                                                       | $I_C$          | 3<br>5        | Adc                      |
| Base Current                                                                                                                  | $I_B$          | 1             | Adc                      |
| Total Power Dissipation<br>@ $T_C = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$                                      | $P_D$          | 15<br>0.12    | W<br>W/ $^\circ\text{C}$ |
| Total Power Dissipation<br>@ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$                                      | $P_D$          | 1.56<br>0.012 | W<br>W/ $^\circ\text{C}$ |
| Operating and Storage Junction Temperature Range                                                                              | $T_J, T_{stg}$ | –65 to +150   | $^\circ\text{C}$         |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

**THERMAL CHARACTERISTICS**

| Characteristic                           | Symbol          | Max | Unit                      |
|------------------------------------------|-----------------|-----|---------------------------|
| Thermal Resistance, Junction–to–Case     | $R_{\theta JC}$ | 8.3 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction–to–Ambient* | $R_{\theta JA}$ | 80  | $^\circ\text{C}/\text{W}$ |
| Lead Temperature for Soldering Purposes  | $T_L$           | 260 | $^\circ\text{C}$          |

\*These ratings are applicable when surface mounted on the minimum pad sizes recommended.

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G,  
MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**

**ELECTRICAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

**OFF CHARACTERISTICS**

|                                                                                                                                                                                                                      |               |           |          |                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|----------|-----------------|
| Collector–Emitter Sustaining Voltage (Note 1)<br>( $I_C = 30\text{ mAdc}$ , $I_B = 0$ )<br>MJD31, NJVMJD31T4G, MJD32, NJVMJD32T4G<br>MJD31C, NJVMJD31CT4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G                          | $V_{CE(sus)}$ | 40<br>100 | –<br>–   | Vdc             |
| Collector Cutoff Current<br>( $V_{CE} = 40\text{ Vdc}$ , $I_B = 0$ )<br>MJD31, NJVMJD31T4G, MJD32, NJVMJD32T4G<br>( $V_{CE} = 60\text{ Vdc}$ , $I_B = 0$ )<br>MJD31C, NJVMJD31CT4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G | $I_{CEO}$     | –<br>–    | 50<br>50 | $\mu\text{Adc}$ |
| Collector Cutoff Current<br>( $V_{CE} = \text{Rated } V_{CEO}$ , $V_{EB} = 0$ )                                                                                                                                      | $I_{CES}$     | –         | 20       | $\mu\text{Adc}$ |
| Emitter Cutoff Current<br>( $V_{BE} = 5\text{ Vdc}$ , $I_C = 0$ )                                                                                                                                                    | $I_{EBO}$     | –         | 1        | mAdc            |

**ON CHARACTERISTICS** (Note 1)

|                                                                                                                             |               |          |         |     |
|-----------------------------------------------------------------------------------------------------------------------------|---------------|----------|---------|-----|
| DC Current Gain<br>( $I_C = 1\text{ Adc}$ , $V_{CE} = 4\text{ Vdc}$ )<br>( $I_C = 3\text{ Adc}$ , $V_{CE} = 4\text{ Vdc}$ ) | $h_{FE}$      | 25<br>10 | –<br>50 |     |
| Collector–Emitter Saturation Voltage<br>( $I_C = 3\text{ Adc}$ , $I_B = 375\text{ mAdc}$ )                                  | $V_{CE(sat)}$ | –        | 1.2     | Vdc |
| Base–Emitter On Voltage<br>( $I_C = 3\text{ Adc}$ , $V_{CE} = 4\text{ Vdc}$ )                                               | $V_{BE(on)}$  | –        | 1.8     | Vdc |


**DYNAMIC CHARACTERISTICS**

|                                                                                                                                 |          |    |   |     |
|---------------------------------------------------------------------------------------------------------------------------------|----------|----|---|-----|
| Current Gain – Bandwidth Product (Note 2)<br>( $I_C = 500\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ , $f_{test} = 1\text{ MHz}$ ) | $f_T$    | 3  | – | MHz |
| Small–Signal Current Gain<br>( $I_C = 0.5\text{ Adc}$ , $V_{CE} = 10\text{ Vdc}$ , $f = 1\text{ kHz}$ )                         | $h_{fe}$ | 20 | – |     |


1. Pulse Test: Pulse Width  $\leq 300\text{ }\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
2.  $f_T = |h_{fe}| \cdot f_{test}$ .

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**

**TYPICAL CHARACTERISTICS**

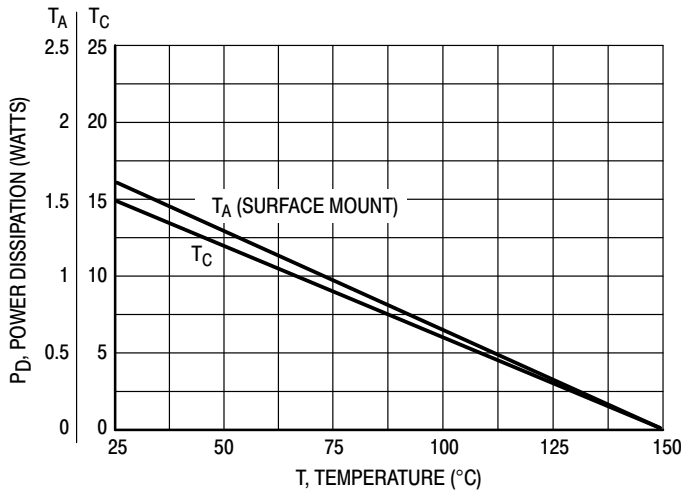


**Figure 1. Power Derating**

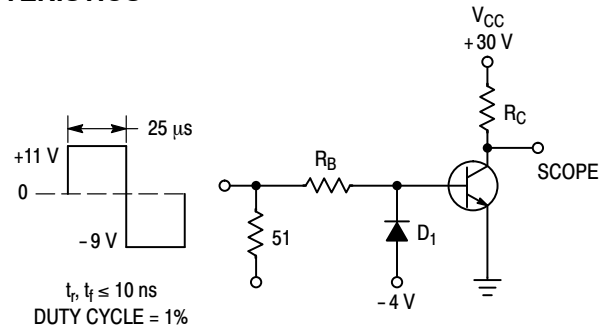


$R_B$  and  $R_C$  VARIED TO OBTAIN DESIRED CURRENT LEVELS  
 $D_1$  MUST BE FAST RECOVERY TYPE, e.g.:  
 1N5825 USED ABOVE  $I_B \approx 100$  mA  
 MSD6100 USED BELOW  $I_B \approx 100$  mA  
 REVERSE ALL POLARITIES FOR PNP.


**Figure 2. Switching Time Test Circuit**

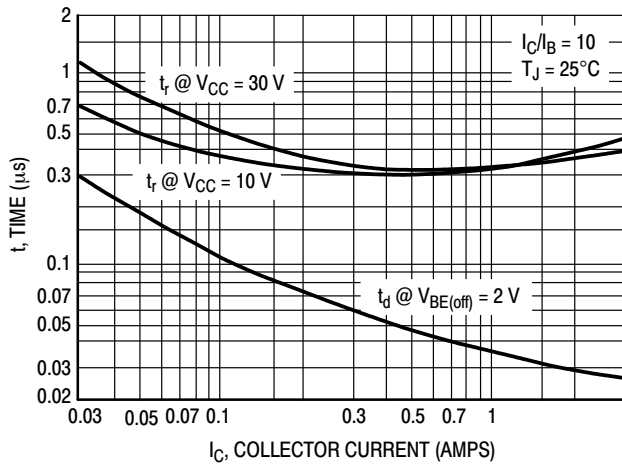

**Figure 3. Turn-On Time**

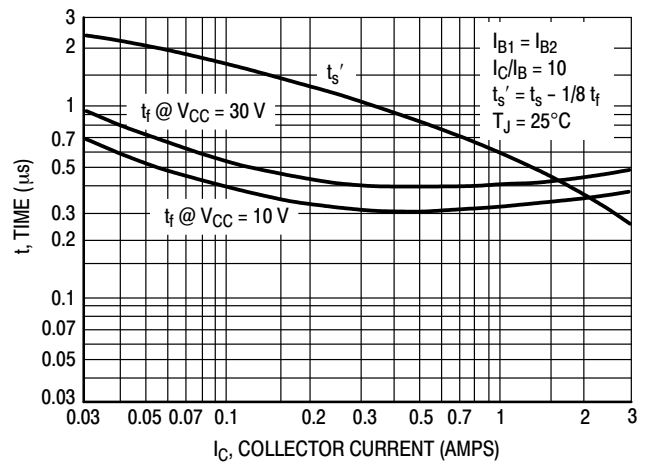


**Figure 4. Turn-Off Time**

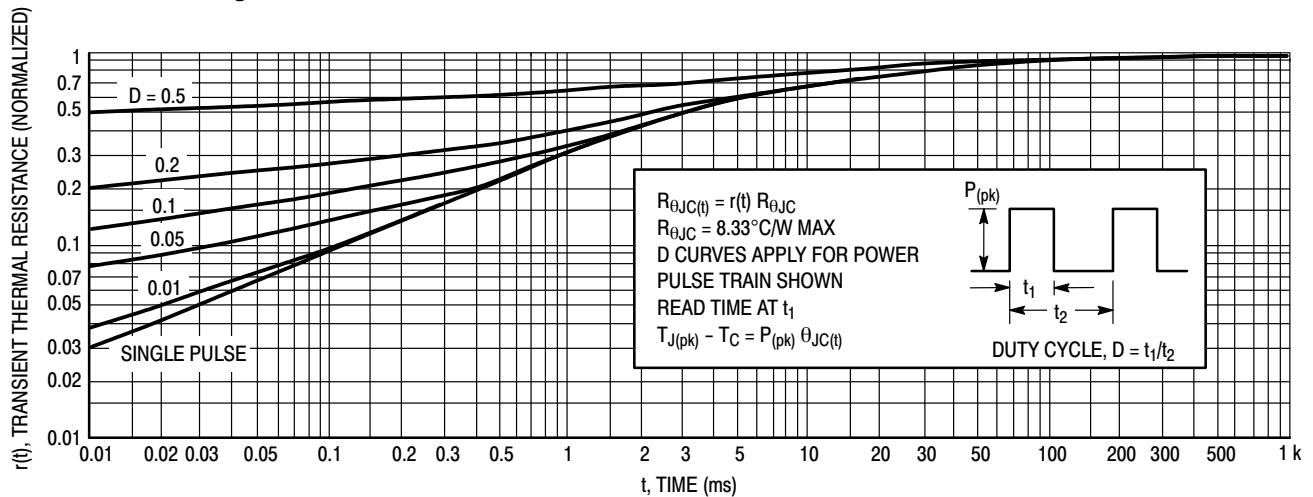


**Figure 5. Thermal Response**

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**


**TYPICAL CHARACTERISTICS – MJD31, MJD31C (NPN)**

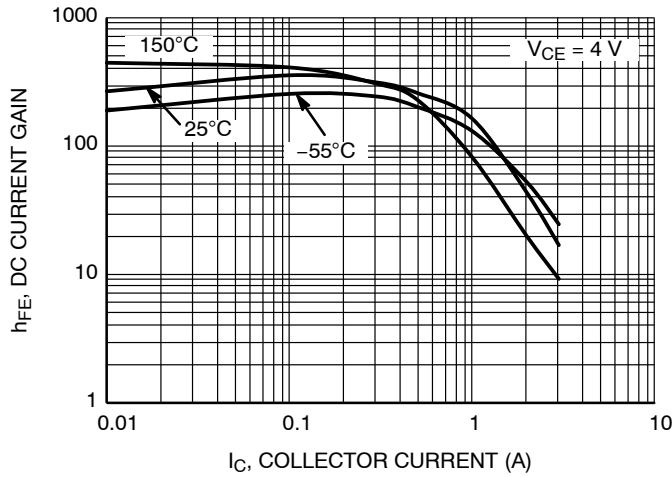


**Figure 6. DC Current Gain at  $V_{CE} = 4\text{ V}$**

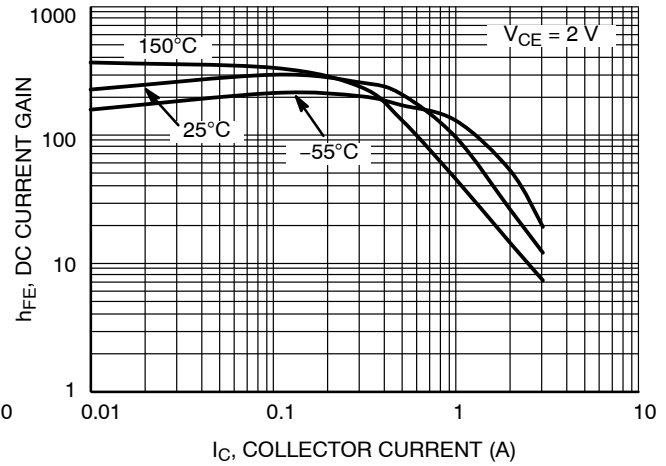


**Figure 7. DC Current Gain at  $V_{CE} = 2\text{ V}$**

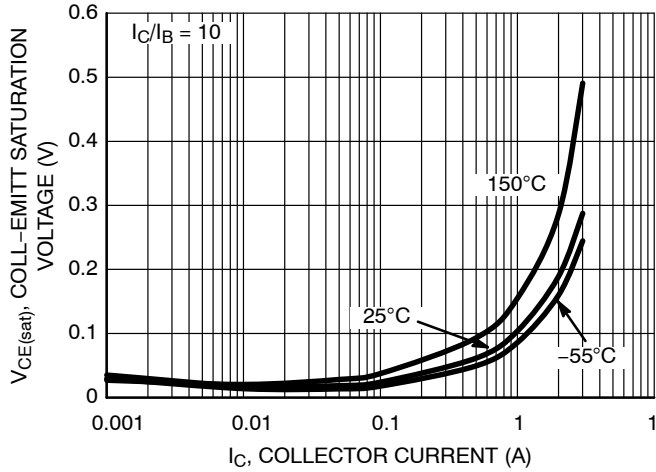


**Figure 8. Collector-Emitter Saturation Voltage**

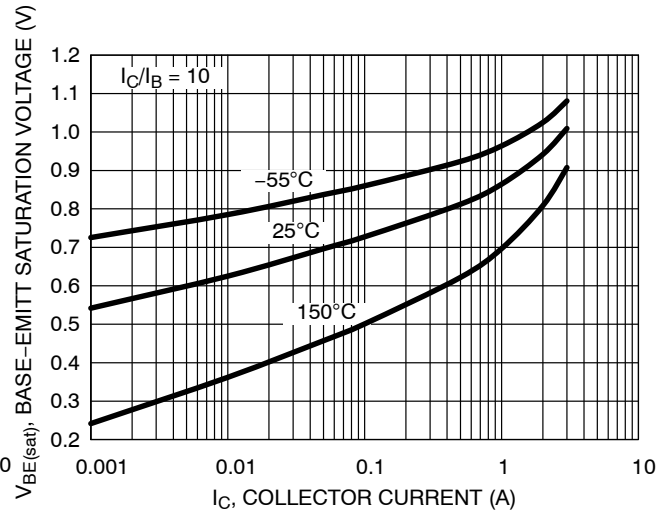

**Figure 9. Base-Emitter Saturation Voltage**

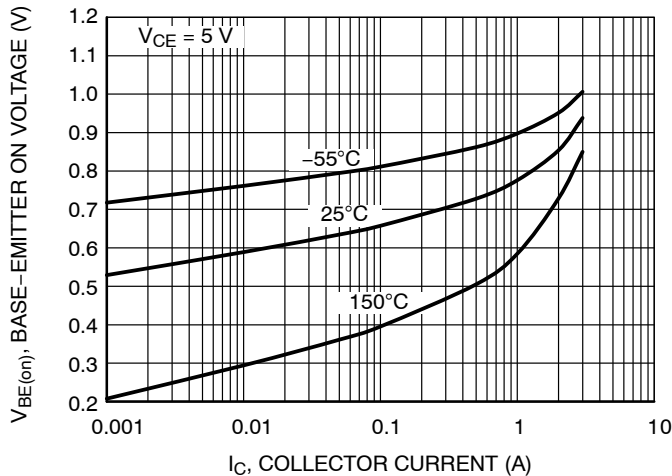


**Figure 10. Base-Emitter "On" Voltage**

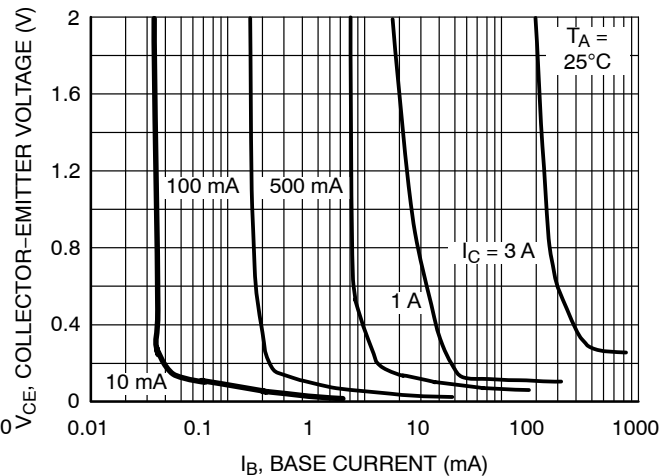


**Figure 11. Collector Saturation Region**

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G,  
MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**


**TYPICAL CHARACTERISTICS – MJD31, MJD31C (NPN)**

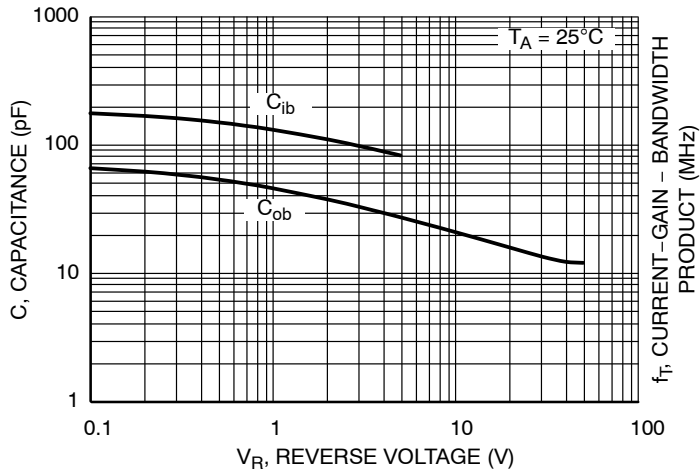

**Figure 12. Capacitance**

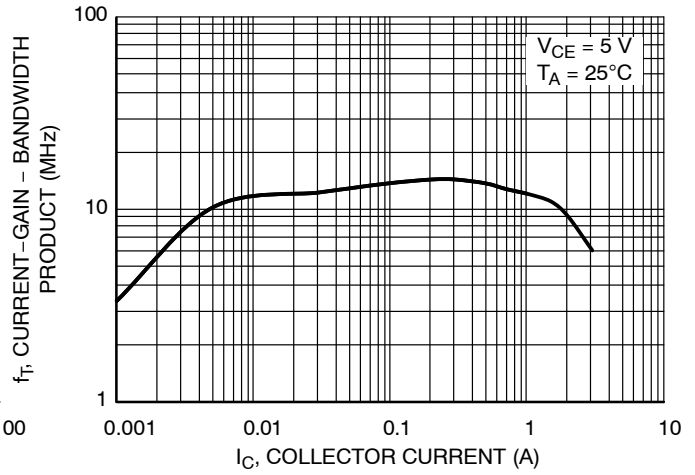


**Figure 13. Current-Gain-Bandwidth Product**

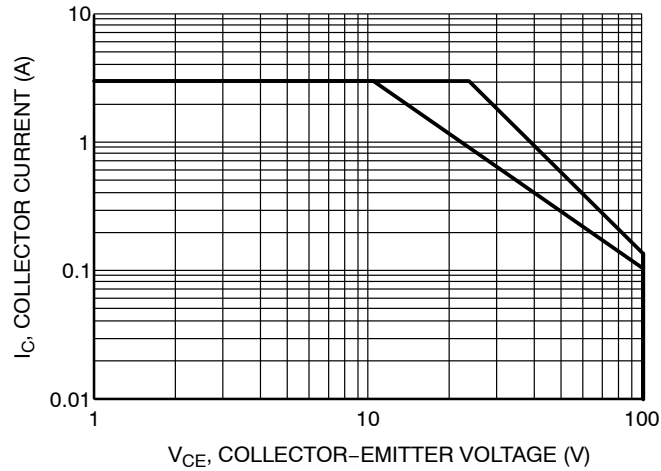


**Figure 14. Safe Operating Area**

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**


**TYPICAL CHARACTERISTICS – MJD32, MJD32C (PNP)**

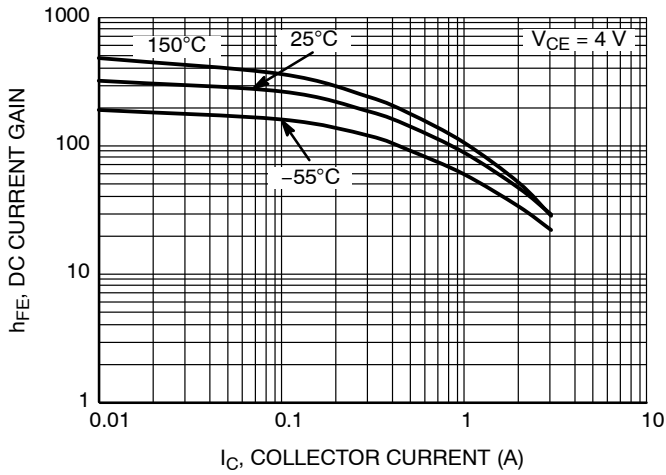


**Figure 15. DC Current Gain at  $V_{CE} = 4\text{ V}$**

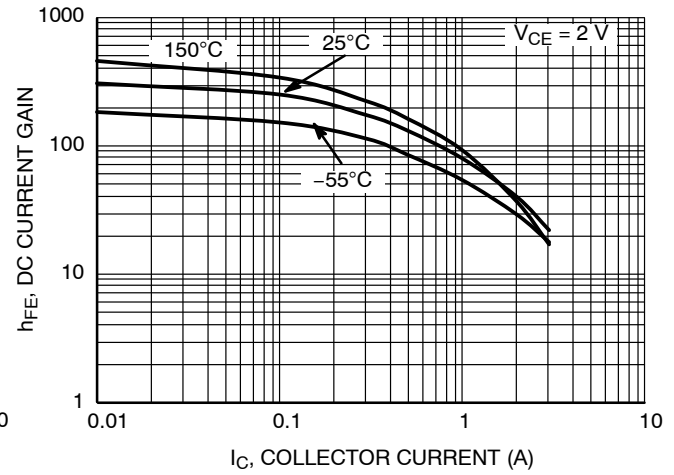


**Figure 16. DC Current Gain at  $V_{CE} = 2\text{ V}$**

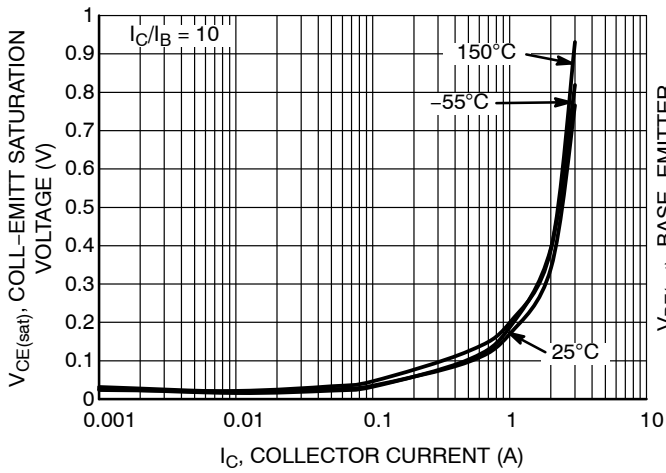


**Figure 17. Collector-Emitter Saturation Voltage**

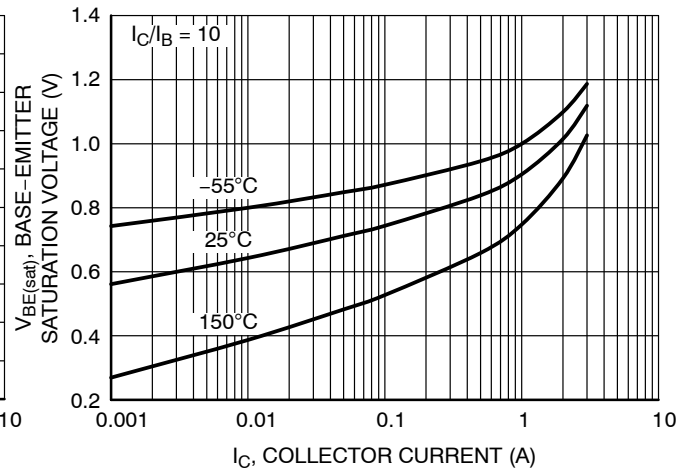

**Figure 18. Base-Emitter Saturation Voltage**

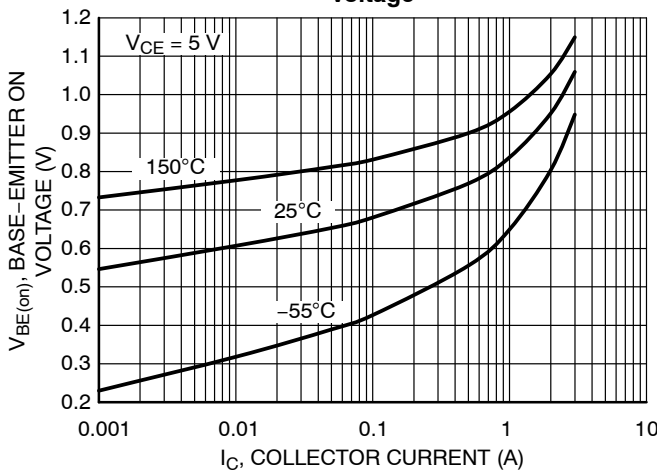


**Figure 19. Base-Emitter "On" Voltage**

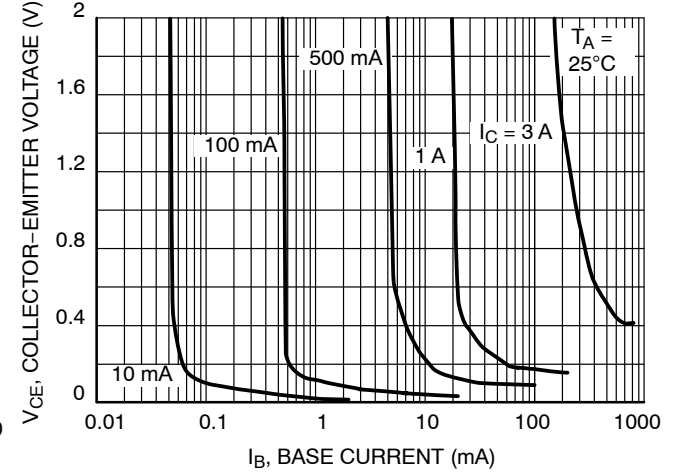


**Figure 20. Collector Saturation Region**

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G,  
MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**


**TYPICAL CHARACTERISTICS**

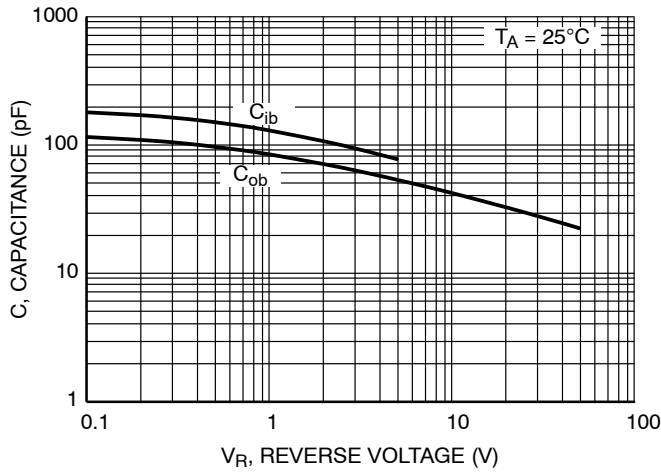

**Figure 21. Capacitance**

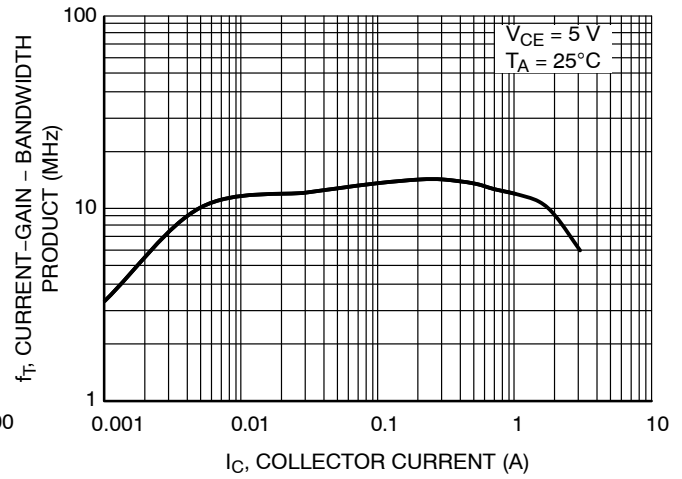

**Figure 22. Current-Gain-Bandwidth Product**

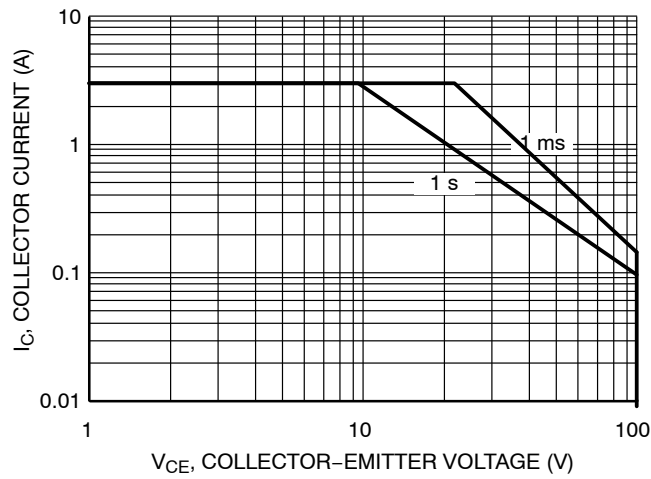

**Figure 23. Safe Operating Area**

**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G,  
MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**

**ORDERING INFORMATION**

| Device       | Package Type        | Package | Shipping <sup>†</sup> |
|--------------|---------------------|---------|-----------------------|
| MJD31CG      | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail       |
| MJD31C1G     | DPAK-3<br>(Pb-Free) | 369D    | 75 Units / Rail       |
| MJD31CRLG    | DPAK<br>(Pb-Free)   | 369C    | 1,800 Tape & Reel     |
| MJD31CT4G    | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| NJVMJD31CT4G | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| MJD31T4G     | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| NJVMJD31T4G  | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| MJD32CG      | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail       |
| NJVMJD32CG   | DPAK<br>(Pb-Free)   | 369C    | 75 Units / Rail       |
| MJD32CRLG    | DPAK<br>(Pb-Free)   | 369C    | 1,800 Tape & Reel     |
| MJD32CT4     | DPAK                | 369C    | 2,500 Tape & Reel     |
| MJD32CT4G    | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| NJVMJD32CT4G | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| MJD32RLG     | DPAK<br>(Pb-Free)   | 369C    | 1,800 Tape & Reel     |
| MJD32T4G     | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |
| NJVMJD32T4G  | DPAK<br>(Pb-Free)   | 369C    | 2,500 Tape & Reel     |


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



**MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G,  
MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)**

**PACKAGE DIMENSIONS**

**DPAK**  
CASE 369C-01  
ISSUE D

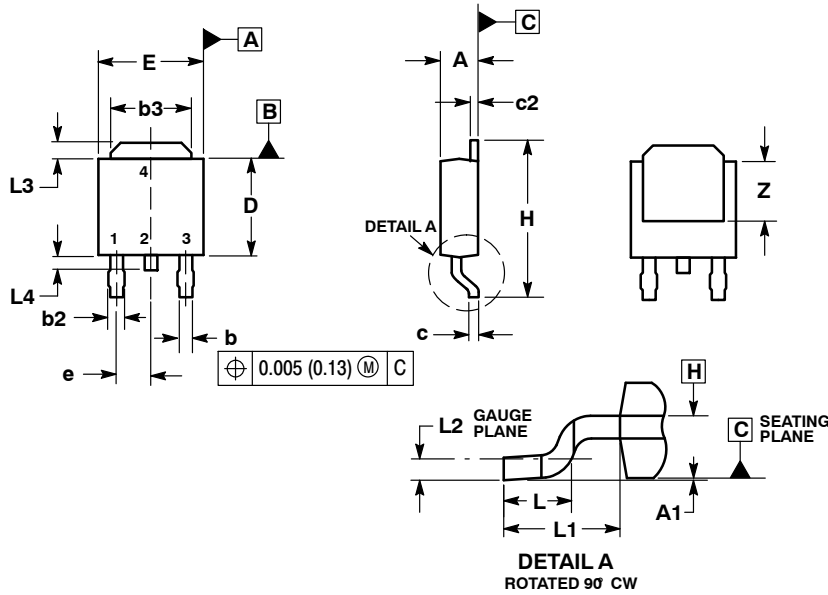


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS b3, L3 and Z.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.086     | 0.094 | 2.18        | 2.38  |
| A1  | 0.000     | 0.005 | 0.00        | 0.13  |
| b   | 0.025     | 0.035 | 0.63        | 0.89  |
| b2  | 0.030     | 0.045 | 0.76        | 1.14  |
| b3  | 0.180     | 0.215 | 4.57        | 5.46  |
| c   | 0.018     | 0.024 | 0.46        | 0.61  |
| c2  | 0.018     | 0.024 | 0.46        | 0.61  |
| D   | 0.235     | 0.245 | 5.97        | 6.22  |
| E   | 0.250     | 0.265 | 6.35        | 6.73  |
| e   | 0.090 BSC |       | 2.29 BSC    |       |
| H   | 0.370     | 0.410 | 9.40        | 10.41 |
| L   | 0.055     | 0.070 | 1.40        | 1.78  |
| L1  | 0.108 REF |       | 2.74 REF    |       |
| L2  | 0.020 BSC |       | 0.51 BSC    |       |
| L3  | 0.035     | 0.050 | 0.89        | 1.27  |
| L4  | ---       | 0.040 | ---         | 1.01  |
| Z   | 0.155     | ---   | 3.93        | ---   |

**SOLDERING FOOTPRINT\***

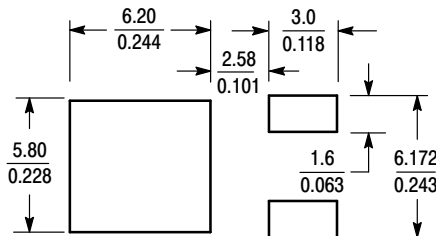

SCALE 3:1  $\left( \frac{\text{mm}}{\text{inches}} \right)$

**STYLE 1:**


- PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MJD31, NJVMJD31T4G, MJD31C, NJVMJD31CT4G (NPN), MJD32, NJVMJD32T4G, MJD32C, NJVMJD32CG, NJVMJD32CT4G (PNP)

## PACKAGE DIMENSIONS

### IPAK CASE 369D-01 ISSUE C

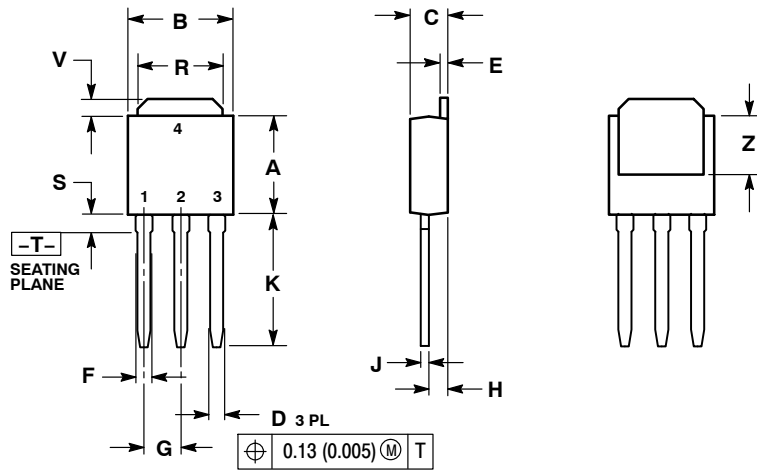

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.235  | 0.245 | 5.97        | 6.35 |
| B   | 0.250  | 0.265 | 6.35        | 6.73 |
| C   | 0.086  | 0.094 | 2.19        | 2.38 |
| D   | 0.027  | 0.035 | 0.69        | 0.88 |
| E   | 0.018  | 0.023 | 0.46        | 0.58 |
| F   | 0.037  | 0.045 | 0.94        | 1.14 |
| G   | 0.090  | BSC   | 2.29        | BSC  |
| H   | 0.034  | 0.040 | 0.87        | 1.01 |
| J   | 0.018  | 0.023 | 0.46        | 0.58 |
| K   | 0.350  | 0.380 | 8.89        | 9.65 |
| R   | 0.180  | 0.215 | 4.45        | 5.45 |
| S   | 0.025  | 0.040 | 0.63        | 1.01 |
| V   | 0.035  | 0.050 | 0.89        | 1.27 |
| Z   | 0.155  | ---   | 3.93        | ---  |

#### STYLE 1:

- PIN 1: BASE  
2. COLLECTOR  
3. EMITTER  
4. COLLECTOR

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

MJD31/D