

Characteristics

Static Electrical Characteristics


Symbol	Parameter	Test Conditions		Typ	max	Units
$V_F^{(2)}$	Maximum forward voltage	$T_J = 25^\circ\text{C}$	$I_F = 1.0 \text{ A}$		0.45	V
$I_R^{(2)}$	Maximum instantaneous reverse current	$T_J = 25^\circ\text{C}$	$V_R = 20\text{V}$		1.0	mA
C_T	Junction capacitance	$V_R = 5\text{V}, f = 1\text{MHz}$		105		pF

⁽²⁾ Measured with a test pulse of 380 μ s to minimize self-heating effect

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\Theta JC}$	Junction to case (bottom)	15	$^\circ\text{C/W}$
$R_{\Theta JA}$	Junction to ambient ⁽³⁾	240	$^\circ\text{C/W}$


⁽³⁾ Mounted on FR-4 PC board using 1oz copper with recommended minimum foot print

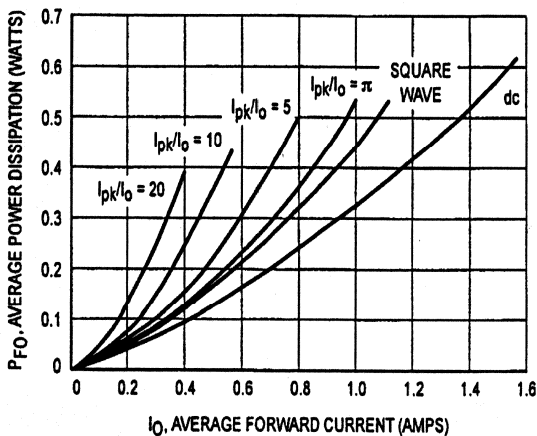


Reverse power dissipation and the possibility of thermal runaway must be considered when operating this device under any reverse voltage conditions. Calculations of T_J therefore must include forward and reverse power effects. The allowable operating T_J may be calculated from the equation:

$T_J = T_{J \max} = r(t)(P_f + P_r)$ where
 $r(t)$ = thermal impedance under given conditions.
 P_f = forward power dissipation, and
 P_r = reverse power dissipation

This graph displays the de-rated allowable T_J due to reverse bias under DC conditions only and is calculated as $T_J = T_{J \max} - r(t) P_r$, Where $r(t) = R_{\theta JA}$. For other power applications further calculations must be performed.

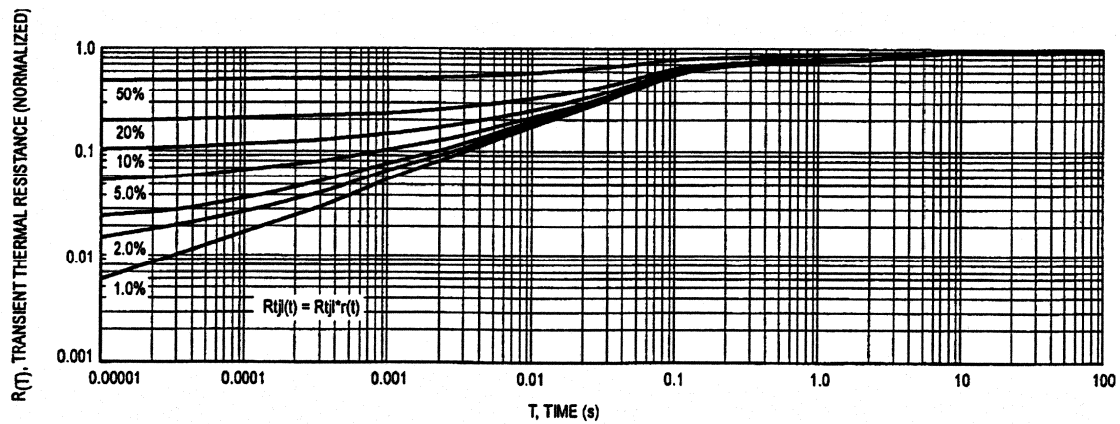

Thermal Impedance Junction to Case (bottom)

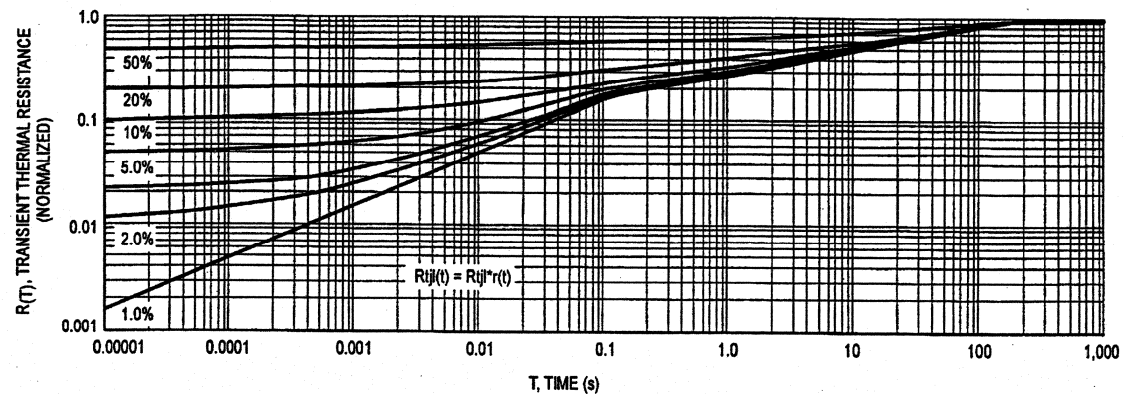


Thermal Impedance Junction to Ambient

Mechanical Characteristics

Physical dimensions

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.73	0.99	0.029	0.039
B	0.40	0.66	0.016	0.026
C	1.77	2.03	0.070	0.080
D	2.21	2.46	0.087	0.097
E	0.50	0.76	0.020	0.030
F	1.29	1.54	0.051	0.061
G	0.53	0.78	0.021	0.031
H	0.10	0.20	0.004	0.008
I	1.77	2.03	0.070	0.080
J	0.89	1.14	0.035	0.045

Footprint dimensions

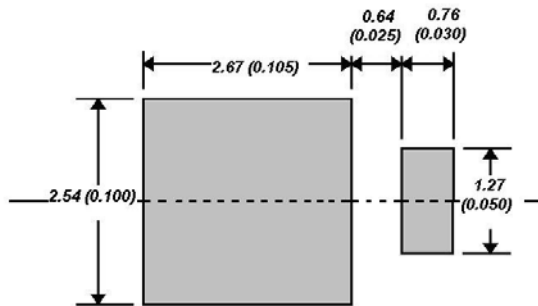

Powermite 1[®] footprint dimensions in *mm (inches)*

Package materials & information

Case : Epoxy meets UL94V-0

Electrode finish : Matte Sn plating - fully RoHS compliant

Marking code :

S17

Ordering information

Product order code	Marking	Package	Weight	Base qty	Delivery mode
UPS5817e3 / TR7	S17	Powermite 1 (DO-216AA)	0.016 g	3000	Tape and reel (7 inch)
UPS5817e3 / TR13	S17	Powermite 1 (DO-216AA)	0.016 g	12000	Tape and reel (13 inch)

Commercial Business Unit
Microsemi Corporation

Microsemi Commercial Offshore de Macau Limitada
Avenida Doutor Mario Soares
Bank of China Building, 18/F, Unit D
Macau SAR

Please refer to www.microsemi.com for the terms and conditions of purchase