


FXZT CONNECTOR

Connector

Inner lock type

(39 circuits or less)

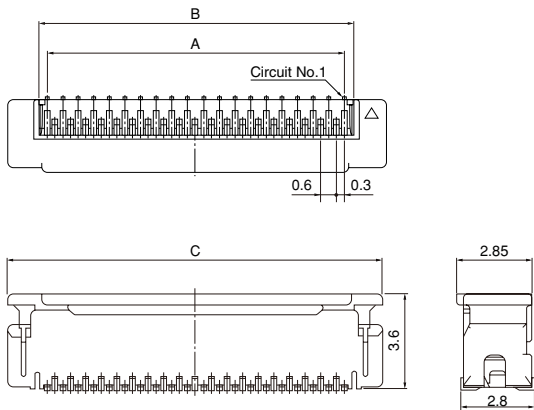

Circuits	Model No.	Dimensions (mm)			Q'ty / reel
		A	B	C	
17	17FXZT-SM1-GAN-TF	4.8	5.4	8.0	2,000
21	21FXZT-SM1-GAN-TF	6.0	6.6	9.2	2,000
23	23FXZT-SM1-GAN-TF	6.6	7.2	9.8	2,000
25	25FXZT-SM1-GAN-TF	7.2	7.8	10.4	2,000
27	27FXZT-SM1-GAN-TF	7.8	8.4	11.0	2,000
31	31FXZT-SM1-GAN-TF	9.0	9.6	12.2	2,000
33	33FXZT-SM1-GAN-TF	9.6	10.2	12.8	2,000
39	39FXZT-SM1-GAN-TF	11.4	12.0	14.6	2,000


Material and Finish

Contact: Copper alloy, nickel-undercoated, gold-plated (nickel-stripe)
Slider housing: Heat resisting resin, UL94V-0, black
Socket housing: Heat resisting resin, UL94V-0, natural

RoHS compliance

Outer lock type

(41 circuits or more)

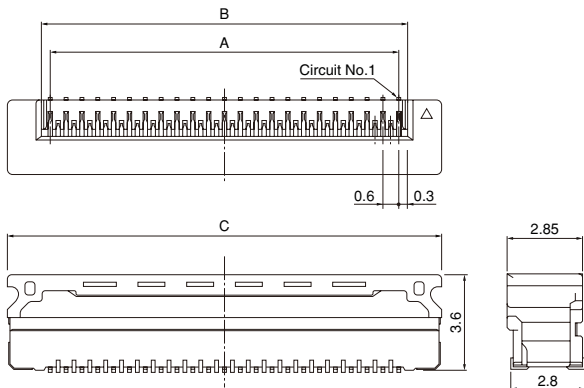


Circuits	Model No.	Dimensions (mm)			Q'ty / reel
		A	B	C	
45	45FXZT-SM1-GAN-TF	13.2	13.8	16.4	2,000
51	51FXZT-SM1-GAN-TF	15.0	15.6	18.2	2,000

Material and Finish

Contact: Copper alloy, nickel-undercoated, gold-plated (nickel-stripe)
Slider housing: Heat resisting resin, UL94V-0, black
Socket housing: Heat resisting resin, UL94V-0, natural

RoHS compliance

Lead section dimensions of FPC

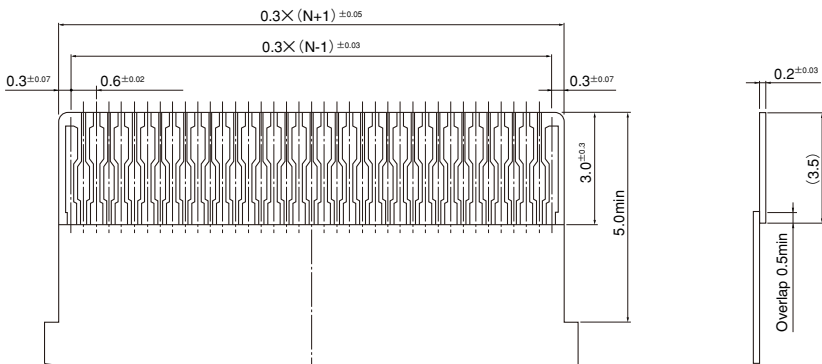

Note: N---Number of circuits