

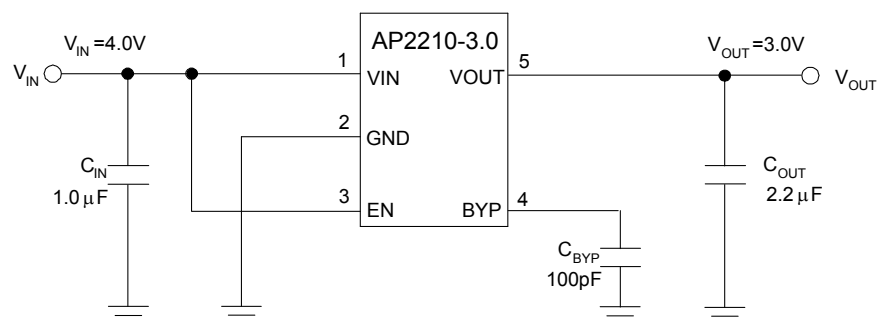


## Typical Applications Circuit (Note 4)

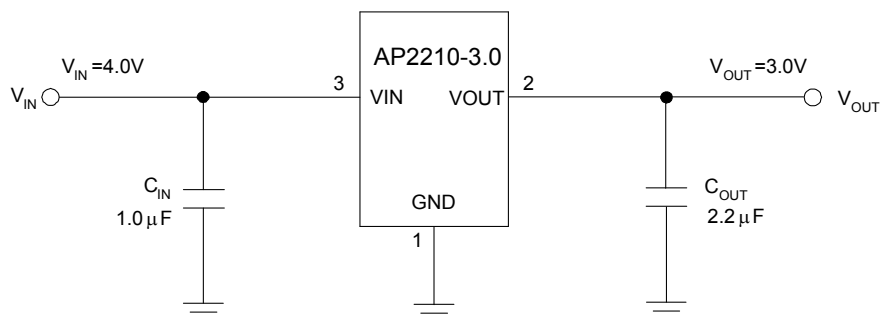

For Fixed Version

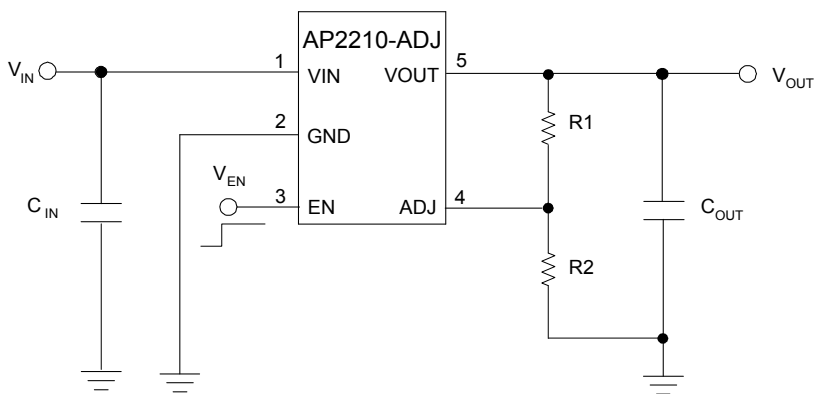

$$V_{OUT} = 1.25V \cdot (1 + R2/R1)$$


For Adjustable Version

Notes: 4. Dropout voltage is 250mV when  $T_A = +25^\circ\text{C}$ . In order to obtain a normal output voltage,  $V_{OUT} + 0.25V$  is the minimum input voltage which will result a low PSRR, imposing a bad influence on system. Therefore, the recommended input voltage is  $V_{OUT} + 1V$  to 13.2V. For AP2210-3.0 version, its input voltage can be set from 4V ( $V_{OUT} + 1V$ ) to 13.2V.


## Pin Descriptions

| Pin Number |         | Pin Name | Function                                                                          |
|------------|---------|----------|-----------------------------------------------------------------------------------|
| SOT23-3    | SOT23-5 |          |                                                                                   |
| 1          | 2       | GND      | Ground                                                                            |
| 2          | 5       | VOUT     | Regulated output voltage                                                          |
| 3          | 1       | VIN      | Input voltage                                                                     |
| –          | 3       | EN       | Enable input: CMOS or TTL compatible input. Logic high=enable, logic low=shutdown |
| –          | 4       | BYP/ADJ  | Bypass capacitor for low noise operation/Adjustable Output                        |

## Functional Block Diagram

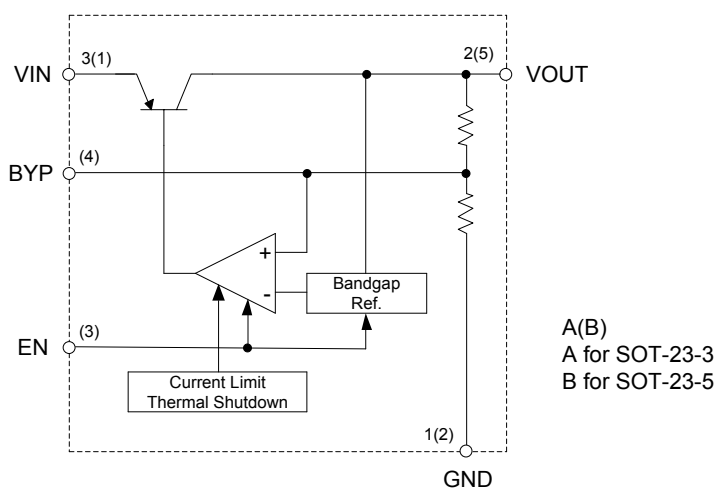

Fixed Version

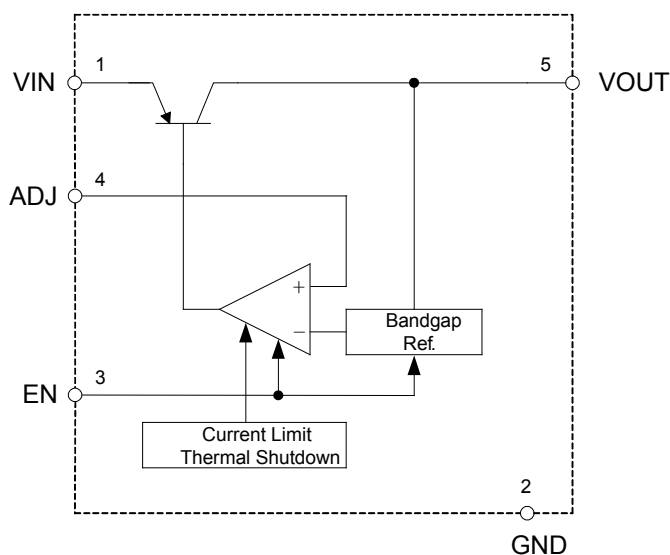

ADJ Version (For SOT-23-5)

## Absolute Maximum Ratings (Note 5)

| Symbol        | Parameter                           | Rating                                     |     | Unit |
|---------------|-------------------------------------|--------------------------------------------|-----|------|
| $V_{IN}$      | Supply Input Voltage                | 15                                         |     | V    |
| $V_{EN}$      | Enable Input Voltage                | 15                                         |     | V    |
| $P_D$         | Power Dissipation                   | Internally Limited<br>(Thermal Protection) |     | W    |
| $T_{LEAD}$    | Lead Temperature (Soldering, 10sec) | +260                                       |     | °C   |
| $T_J$         | Junction Temperature                | +150                                       |     | °C   |
| $T_{STG}$     | Storage Temperature                 | -65 to +150                                |     | °C   |
| ESD           | ESD (Machine Model)                 | 300                                        |     | V    |
| $\theta_{JA}$ | Thermal Resistance (No Heatsink)    | SOT-23-3                                   | 200 | °C/W |
|               |                                     | SOT-23-5                                   | 200 |      |

Notes: 5. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

## Recommended Operating Conditions

| Symbol   | Parameter                      | Min | Max  | Unit |
|----------|--------------------------------|-----|------|------|
| $V_{IN}$ | Supply Input Voltage           | 2.5 | 13.2 | V    |
| $V_{EN}$ | Enable Input Voltage           | 0   | 13.2 | V    |
| $T_J$    | Operating Junction Temperature | -40 | +125 | °C   |

**AP2210-2.5 Electrical Characteristics** ( $V_{IN} = 3.5V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ        | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —          | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —          | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b> | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>48</b>  | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 3.5V$ to $13.2V$                | —         | 1.5        | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —          | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1          | 6          | mV               |
|                                     |                                                 |                                           | —         | —          | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15         | 50         | mV               |
|                                     |                                                 |                                           | —         | —          | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110        | 150        |                  |
|                                     |                                                 |                                           | —         | —          | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140        | 250        |                  |
|                                     |                                                 |                                           | —         | —          | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165        | 275        |                  |
|                                     |                                                 |                                           | —         | —          | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250        | 400        |                  |
|                                     |                                                 |                                           | —         | —          | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01       | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —          | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100        | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —          | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350        | 600        |                  |
|                                     |                                                 |                                           | —         | —          | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3        | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —          | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4          | 10         |                  |
|                                     |                                                 |                                           | —         | —          | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75         | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b> | 900        | mA               |

**AP2210-2.5 Electrical Characteristics** (Cont.) ( $V_{IN} = 3.5V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit             |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|------------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV / \sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V                |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                  |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V                |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$          |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                  |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$          |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                  |

- Notes:
6. Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  7. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  8. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  9. Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  10. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**AP2210-2.8 Electrical Characteristics** ( $V_{IN} = 3.8V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ         | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|-------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —           | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —           | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b>  | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>42.8</b> | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 3.8V$ to $13.2V$                | —         | 1.5         | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —           | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1           | 6          | mV               |
|                                     |                                                 |                                           | —         | —           | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15          | 50         | mV               |
|                                     |                                                 |                                           | —         | —           | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110         | 150        |                  |
|                                     |                                                 |                                           | —         | —           | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140         | 250        |                  |
|                                     |                                                 |                                           | —         | —           | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165         | 275        |                  |
|                                     |                                                 |                                           | —         | —           | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250         | 400        |                  |
|                                     |                                                 |                                           | —         | —           | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01        | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —           | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100         | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —           | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350         | 600        |                  |
|                                     |                                                 |                                           | —         | —           | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3         | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —           | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4           | 10         |                  |
|                                     |                                                 |                                           | —         | —           | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75          | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b>  | 900        | mA               |

**AP2210-2.8 Electrical Characteristics** (Cont.) ( $V_{IN} = 3.8V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit             |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|------------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV / \sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V                |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                  |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V                |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$          |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                  |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$          |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                  |

- Notes:
6. Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  7. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  8. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  9. Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  10. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**AP2210-3.0 Electrical Characteristics** ( $V_{IN} = 4V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ        | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —          | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —          | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b> | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>40</b>  | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 4V$ to $13.2V$                  | —         | 1.5        | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —          | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1          | 6          | mV               |
|                                     |                                                 |                                           | —         | —          | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15         | 50         | mV               |
|                                     |                                                 |                                           | —         | —          | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110        | 150        |                  |
|                                     |                                                 |                                           | —         | —          | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140        | 250        |                  |
|                                     |                                                 |                                           | —         | —          | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165        | 275        |                  |
|                                     |                                                 |                                           | —         | —          | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250        | 400        |                  |
|                                     |                                                 |                                           | —         | —          | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01       | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —          | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100        | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —          | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350        | 600        |                  |
|                                     |                                                 |                                           | —         | —          | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3        | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —          | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4          | 10         |                  |
|                                     |                                                 |                                           | —         | —          | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75         | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b> | 900        | mA               |

**AP2210-3.0 Electrical Characteristics** (Cont.) ( $V_{IN} = 4V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit             |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|------------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV / \sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V                |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                  |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V                |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$          |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                  |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$          |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                  |

- Notes:
6. Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  7. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  8. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  9. Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  10. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**AP2210-3.3 Electrical Characteristics** ( $V_{IN} = 4.3V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ         | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|-------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —           | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —           | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b>  | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>36.3</b> | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 4.3V$ to $13.2V$                | —         | 1.5         | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —           | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1           | 6          | mV               |
|                                     |                                                 |                                           | —         | —           | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15          | 50         | mV               |
|                                     |                                                 |                                           | —         | —           | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110         | 150        |                  |
|                                     |                                                 |                                           | —         | —           | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140         | 250        |                  |
|                                     |                                                 |                                           | —         | —           | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165         | 275        |                  |
|                                     |                                                 |                                           | —         | —           | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250         | 400        |                  |
|                                     |                                                 |                                           | —         | —           | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01        | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —           | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100         | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —           | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350         | 600        |                  |
|                                     |                                                 |                                           | —         | —           | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3         | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —           | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4           | 10         |                  |
|                                     |                                                 |                                           | —         | —           | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75          | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b>  | 900        | mA               |

**AP2210-3.3 Electrical Characteristics** (Cont.) ( $V_{IN} = 4.3V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit           |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|----------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV/\sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V              |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V              |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$        |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$        |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                |

- Notes:
6. Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  7. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  8. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  9. Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  10. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**AP2210-3.6 Electrical Characteristics** ( $V_{IN} = 4.6V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ        | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —          | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —          | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b> | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>48</b>  | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 4.6V$ to $13.2V$                | —         | 1.5        | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —          | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1          | 6          | mV               |
|                                     |                                                 |                                           | —         | —          | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15         | 50         | mV               |
|                                     |                                                 |                                           | —         | —          | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110        | 150        |                  |
|                                     |                                                 |                                           | —         | —          | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140        | 250        |                  |
|                                     |                                                 |                                           | —         | —          | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165        | 275        |                  |
|                                     |                                                 |                                           | —         | —          | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250        | 400        |                  |
|                                     |                                                 |                                           | —         | —          | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01       | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —          | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100        | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —          | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350        | 600        |                  |
|                                     |                                                 |                                           | —         | —          | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3        | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —          | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4          | 10         |                  |
|                                     |                                                 |                                           | —         | —          | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75         | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b> | 900        | mA               |

**AP2210-3.6 Electrical Characteristics** (Cont.) ( $V_{IN} = 4.6V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit             |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|------------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV / \sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V                |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                  |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V                |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$          |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                  |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$          |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                  |

- Notes:
6. Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  7. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  8. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  9. Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  10. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**AP2210-4.0 Electrical Characteristics** ( $V_{IN} = 5.0V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ        | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —          | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —          | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b> | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>48</b>  | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 5.0V$ to $13.2V$                | —         | 1.5        | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —          | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1          | 6          | mV               |
|                                     |                                                 |                                           | —         | —          | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15         | 50         | mV               |
|                                     |                                                 |                                           | —         | —          | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110        | 150        |                  |
|                                     |                                                 |                                           | —         | —          | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140        | 250        |                  |
|                                     |                                                 |                                           | —         | —          | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165        | 275        |                  |
|                                     |                                                 |                                           | —         | —          | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250        | 400        |                  |
|                                     |                                                 |                                           | —         | —          | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01       | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —          | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100        | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —          | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350        | 600        |                  |
|                                     |                                                 |                                           | —         | —          | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3        | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —          | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4          | 10         |                  |
|                                     |                                                 |                                           | —         | —          | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75         | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b> | 900        | mA               |

**AP2210-4.0 Electrical Characteristics** (Cont.) ( $V_{IN} = 5.0V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit             |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|------------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV / \sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V                |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                  |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V                |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$          |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                  |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$          |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                  |

- Notes:
6. Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  7. Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  8. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  9. Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  10. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**AP2210-5.0 Electrical Characteristics** ( $V_{IN} = 6.0V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                | Min       | Typ        | Max        | Unit             |
|-------------------------------------|-------------------------------------------------|-------------------------------------------|-----------|------------|------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$        | -1        | —          | 1          | %                |
|                                     |                                                 |                                           | <b>-2</b> | —          | <b>2</b>   |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                         | —         | <b>120</b> | —          | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                         | —         | <b>48</b>  | —          | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = 6.0V$ to $13.2V$                | —         | 1.5        | 4.5        | mV               |
|                                     |                                                 |                                           | —         | —          | <b>12</b>  |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to $300mA$              | —         | 1          | 6          | mV               |
|                                     |                                                 |                                           | —         | —          | <b>30</b>  |                  |
| $V_{DROP}$                          | Dropout Voltage (Note 9)                        | $I_{OUT} = 100\mu A$                      | —         | 15         | 50         | mV               |
|                                     |                                                 |                                           | —         | —          | <b>70</b>  |                  |
|                                     |                                                 | $I_{OUT} = 50mA$                          | —         | 110        | 150        |                  |
|                                     |                                                 |                                           | —         | —          | <b>230</b> |                  |
|                                     |                                                 | $I_{OUT} = 100mA$                         | —         | 140        | 250        |                  |
|                                     |                                                 |                                           | —         | —          | <b>300</b> |                  |
|                                     |                                                 | $I_{OUT} = 150mA$                         | —         | 165        | 275        |                  |
|                                     |                                                 |                                           | —         | —          | <b>350</b> |                  |
|                                     |                                                 | $I_{OUT} = 300mA$                         | —         | 250        | 400        |                  |
|                                     |                                                 |                                           | —         | —          | <b>500</b> |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)             | —         | 0.01       | 1          | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)            | —         | —          | <b>5</b>   |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$ | —         | 100        | 150        | $\mu A$          |
|                                     |                                                 |                                           | —         | —          | <b>180</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$     | —         | 350        | 600        |                  |
|                                     |                                                 |                                           | —         | —          | <b>800</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$    | —         | 1.3        | 1.9        | mA               |
|                                     |                                                 |                                           | —         | —          | <b>2.5</b> |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$    | —         | 4          | 10         |                  |
|                                     |                                                 |                                           | —         | —          | <b>15</b>  |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$        | —         | 75         | —          | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                            | —         | <b>450</b> | 900        | mA               |

**AP2210-5.0 Electrical Characteristics** (Cont.) ( $V_{IN} = 6.0V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol   | Parameter                       | Conditions                                                         | Min        | Typ  | Max         | Unit             |
|----------|---------------------------------|--------------------------------------------------------------------|------------|------|-------------|------------------|
| $e_{no}$ | Output Noise                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260  | —           | $nV / \sqrt{Hz}$ |
| $V_{IL}$ | Enable Input Logic-low Voltage  | Regulator shutdown                                                 | —          | —    | 0.4         | V                |
|          |                                 |                                                                    | —          | —    | <b>0.18</b> |                  |
| $V_{IH}$ | Enable Input Logic-high Voltage | Regulator enabled                                                  | <b>2.0</b> | —    | —           | V                |
| $I_{IL}$ | Enable Input Logic-low Current  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01 | 1           | $\mu A$          |
|          |                                 | $V_{IL} \leq 0.18V$                                                | —          | —    | <b>2</b>    |                  |
| $I_{IH}$ | Enable Input Logic-high Current | $V_{IL} \geq 2.0V$                                                 | —          | 5    | 20          | $\mu A$          |
|          |                                 | $V_{IL} \geq 2.0V$                                                 | —          | —    | <b>25</b>   |                  |

- Notes:
- Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  - Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  - Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  - Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  - Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.


**AP2210-ADJ Electrical Characteristics** ( $V_{IN} = V_{OUT} + 1V$ ,  $I_{OUT} = 100\mu A$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{EN} \geq 2.0V$ ,  $T_J = +25^\circ C$ , **Bold** typeface applies over  $-40^\circ C \leq T_J \leq +125^\circ C$  (Note 6), unless otherwise specified.)

| Symbol                              | Parameter                                       | Conditions                                                         | Min        | Typ        | Max         | Unit             |
|-------------------------------------|-------------------------------------------------|--------------------------------------------------------------------|------------|------------|-------------|------------------|
| $\Delta V_{OUT}/V_{OUT}$            | Output Voltage Accuracy                         | Variation from specified $V_{OUT}$                                 | -1         | —          | 1           | %                |
|                                     |                                                 |                                                                    | <b>-2</b>  | —          | <b>2</b>    |                  |
| $\Delta V_{OUT}/\Delta T$           | Output Voltage Temperature Coefficient (Note 7) | —                                                                  | —          | <b>120</b> | —           | $\mu V/^\circ C$ |
| $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                 | —                                                                  | —          | <b>48</b>  | —           | ppm/ $^\circ C$  |
| $V_{RLINE}$                         | Line Regulation                                 | $V_{IN} = V_{OUT} + 1V$ to 13.2V                                   | —          | 1.5        | 4.5         | mV               |
|                                     |                                                 |                                                                    | —          | —          | <b>12</b>   |                  |
| $V_{RLOAD}$                         | Load Regulation (Note 8)                        | $I_{OUT} = 0.1mA$ to 300mA                                         | —          | 1          | 6           | mV               |
|                                     |                                                 |                                                                    | —          | —          | <b>30</b>   |                  |
| $I_{STD}$                           | Standby Current                                 | $V_{EN} \leq 0.4V$ (shutdown)                                      | —          | 0.01       | 1           | $\mu A$          |
|                                     |                                                 | $V_{EN} \leq 0.18V$ (shutdown)                                     | —          | —          | <b>5</b>    |                  |
| $I_{GND}$                           | Ground Pin Current (Note 10)                    | $V_{EN} \geq 2.0V$ , $I_{OUT} = 100\mu A$                          | —          | 100        | 150         | $\mu A$          |
|                                     |                                                 |                                                                    | —          | —          | <b>180</b>  |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 50mA$                              | —          | 350        | 600         |                  |
|                                     |                                                 |                                                                    | —          | —          | <b>800</b>  |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 150mA$                             | —          | 1.3        | 1.9         | mA               |
|                                     |                                                 |                                                                    | —          | —          | <b>2.5</b>  |                  |
|                                     |                                                 | $V_{EN} \geq 2.0V$ , $I_{OUT} = 300mA$                             | —          | 4          | 10          |                  |
|                                     |                                                 |                                                                    | —          | —          | <b>15</b>   |                  |
| PSRR                                | Ripple Rejection                                | $f = 100Hz$ , $I_{OUT} = 100\mu A$                                 | —          | 75         | —           | dB               |
| $I_{LIMIT}$                         | Current Limit                                   | $V_{OUT} = 0V$                                                     | —          | <b>450</b> | 900         | mA               |
| $e_{no}$                            | Output Noise                                    | $I_{OUT} = 50mA$ , $C_{OUT} = 2.2\mu F$ ,<br>100pF from BYP to GND | —          | 260        | —           | $nV/\sqrt{Hz}$   |
| $V_{IL}$                            | Enable Input Logic-low Voltage                  | Regulator shutdown                                                 | —          | —          | 0.4         | V                |
|                                     |                                                 |                                                                    | —          | —          | <b>0.18</b> |                  |
| $V_{IH}$                            | Enable Input Logic-high Voltage                 | Regulator enabled                                                  | <b>2.0</b> | —          | —           | V                |
| $I_{IL}$                            | Enable Input Logic-low Current                  | $V_{IL} \leq 0.4V$                                                 | —          | 0.01       | 1           | $\mu A$          |
|                                     |                                                 | $V_{IL} \leq 0.18V$                                                | —          | —          | <b>2</b>    |                  |
| $I_{IH}$                            | Enable Input Logic-high Current                 | $V_{IL} \geq 2.0V$                                                 | —          | 5          | 20          | $\mu A$          |
|                                     |                                                 | $V_{IL} \geq 2.0V$                                                 | —          | —          | <b>25</b>   |                  |


- Notes:
- Specifications in bold type are limited to  $-40^\circ C \leq T_J \leq +125^\circ C$ . Limits over temperature are guaranteed by design, but not tested in production.
  - Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
  - Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 300mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
  - Dropout voltage is defined as the input to output differential at which the output voltage drops 1% ( $T_J = +25^\circ C$ ) or 2% ( $-40^\circ C \leq T_J \leq +125^\circ C$ ) below its nominal value measured at 1V differential.
  - Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

## Performance Characteristics


Output Voltage vs. Junction Temperature

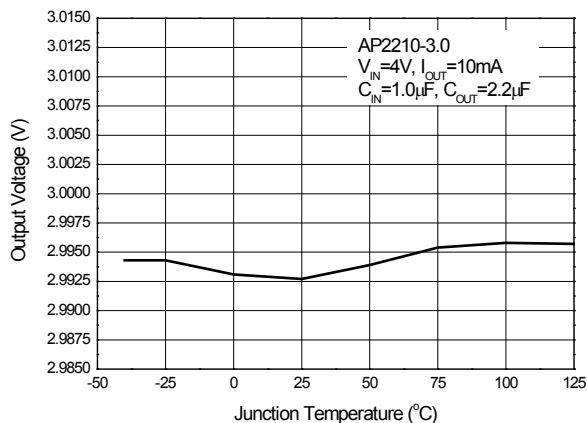


Dropout Voltage vs. Junction Temperature

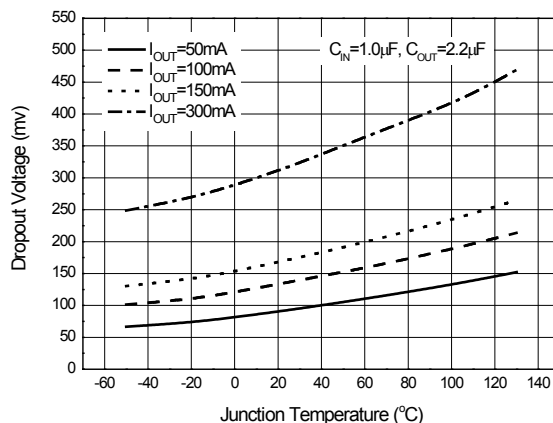


Ground Pin Current vs. Output Current

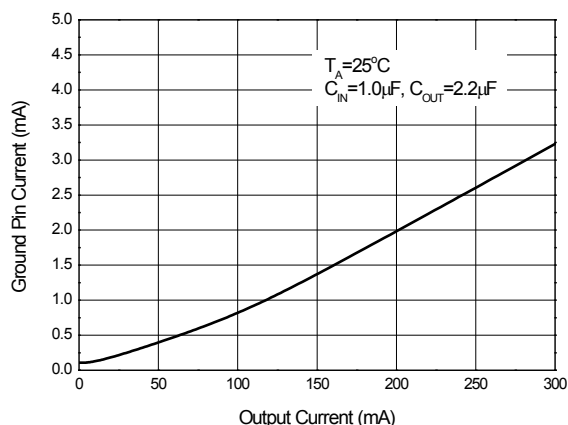


Ground Pin Current vs. Junction Temperature

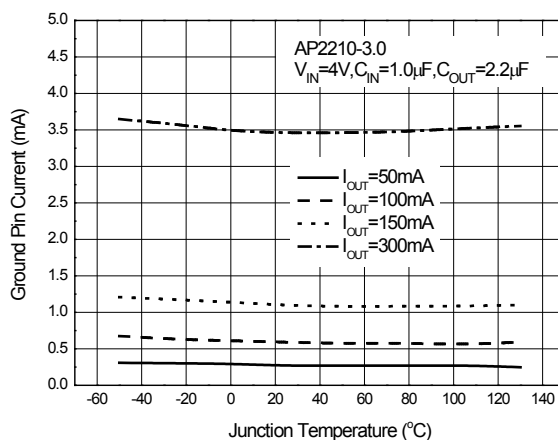

Enable Current vs. Junction Temperature

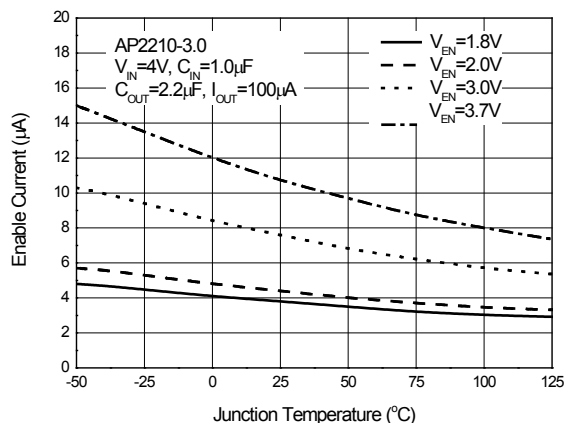


Enable Voltage vs. Junction Temperature

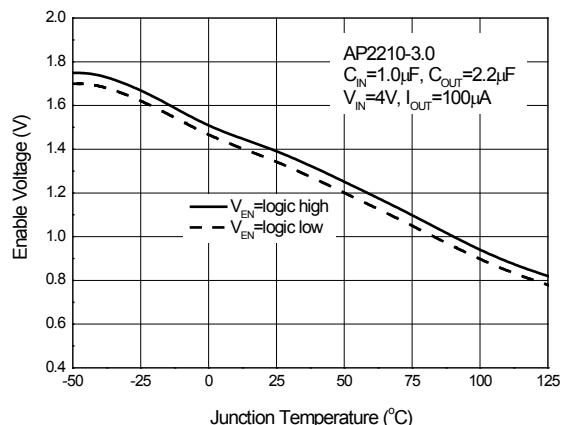


## Performance Characteristics (Cont.)


**Output Noise vs. Frequency**

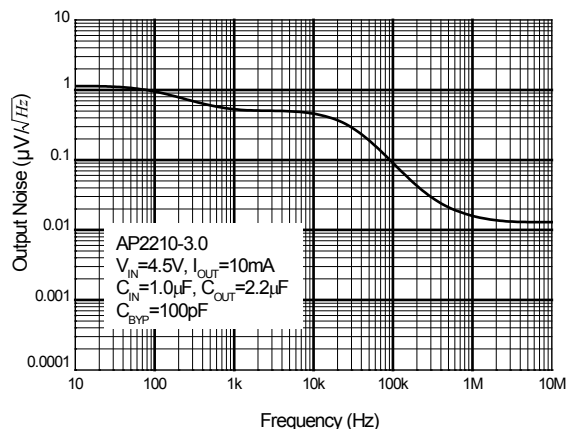


**Line Transient**  
 (Conditions:  $V_{IN} = 4$  to  $5V$ ,  $V_{EN} = 2V$ ,  
 $I_{OUT} = 1mA$ ,  $C_{OUT} = 2.2\mu F$ )

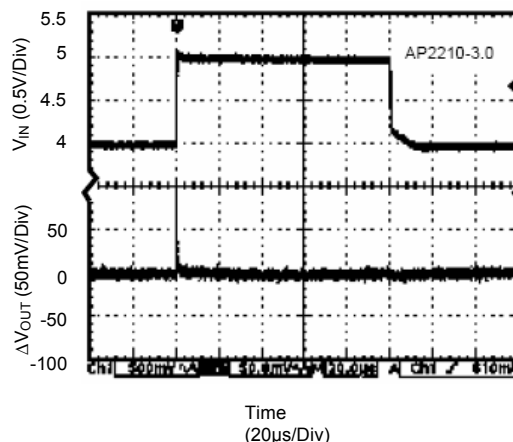


**Load Transient**  
 (Conditions:  $V_{IN} = 4V$ ,  $V_{EN} = 2V$ ,  
 $I_{OUT} = 10mA$  to  $300mA$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ )

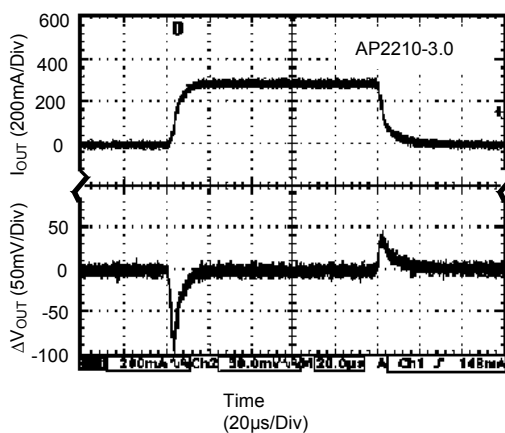


**$V_{EN}$  vs.  $V_{OUT}$**   
 (Conditions:  $V_{EN} = 0$  to  $2V$ ,  $V_{IN} = 4V$ ,  
 $I_{OUT} = 30mA$ ,  $C_{IN} = 1.0\mu F$ ,  $C_{OUT} = 2.2\mu F$ )

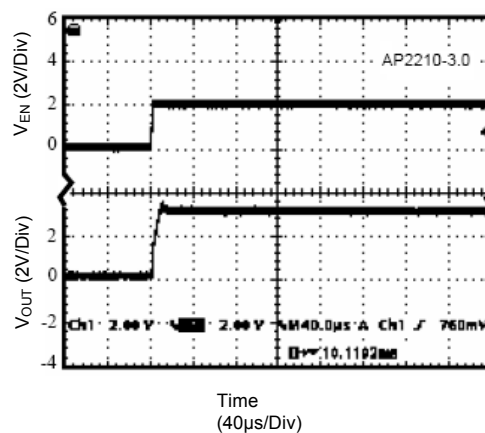

**PSRR vs. Frequency**

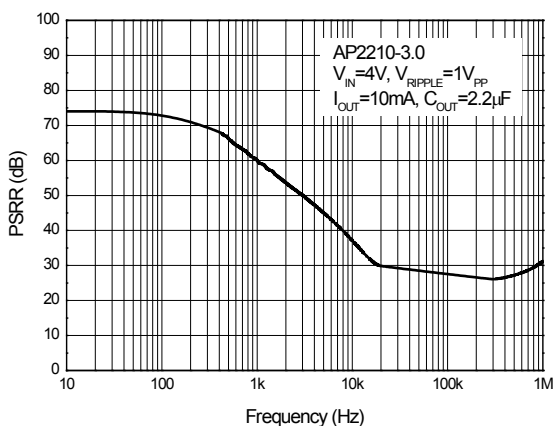


**Power Dissipation vs. Ambient Temperature**

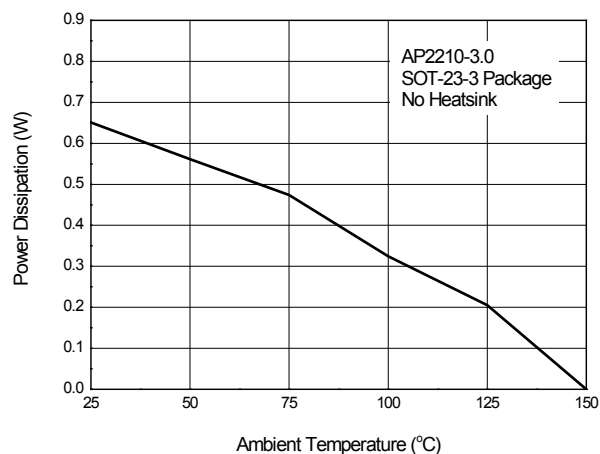


## Performance Characteristics (Cont.)


Power Dissipation vs. Ambient Temperature

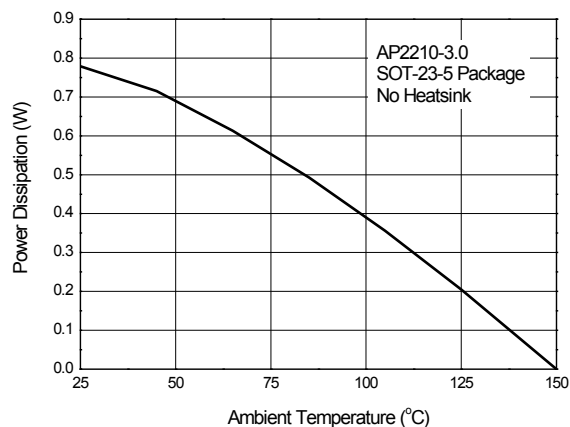


ESR vs. Output Current

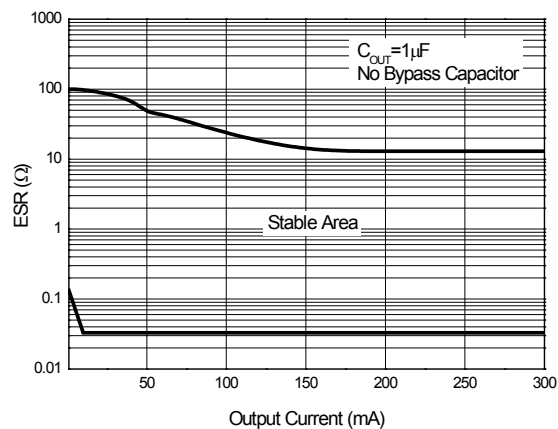

ESR vs. Output Current

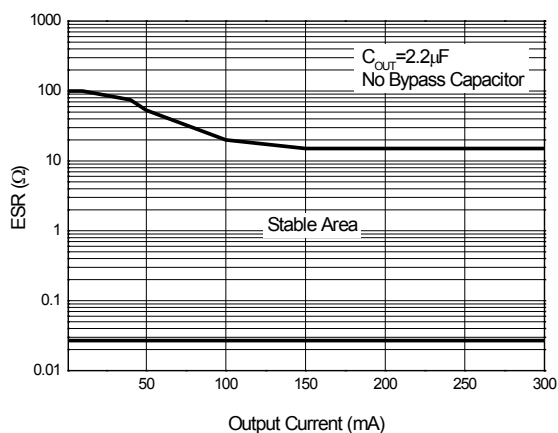

ESR vs. Output Current

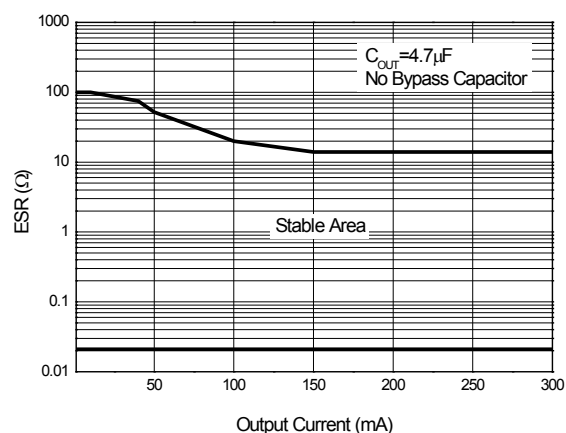

---

## Application Information

---

### Input Capacitor

A 1 $\mu$ F minimum capacitor is recommended to be placed between  $V_{IN}$  and GND.

### Output Capacitor

An output capacitor is required to prevent oscillation. A 1.0 $\mu$ F minimum is recommended when  $C_{BYP}$  is unused. A 2.2 $\mu$ F minimum is recommended when  $C_{BYP}$  is 100pF. The output capacitor may be increased to improve transient response.

### Noise Bypass Capacitor

A bypass capacitor is connected to the internal voltage reference. A small capacitor connected from BYP to GND makes this reference quiet, resulting in a significant reduction in output noise, but the ESR stable area will be narrowed. In order to keep the output stability, it is recommended to use the bypass capacitor no more than 100pF.

The start-up speed of the AP2210 is inversely proportional to the value of the reference bypass capacitor. In some cases, if output noise is not a major concern and rapid turn-on is necessary, omit  $C_{BYP}$  and leave BYP open.

### Power Dissipation

Thermal shutdown may take place if the maximum power dissipation is exceeded in application. Under all possible operating conditions, the junction temperature must be within the range specified under absolute maximum ratings to avoid thermal shutdown.

To determine if the power dissipated in the regulator reaches the maximum power dissipation (see Figure Power Dissipation vs. Ambient Temperature and Figure ESR vs. Output Current in Page 22), use:

$$T_J = P_D \cdot \theta_{JA} + T_A$$

$$P_D = (V_{IN} - V_{OUT}) \cdot I_{OUT} + V_{IN} \cdot I_{GND}$$

Where:  $T_J \leq T_{J(max)}$ ,  $T_{J(max)}$  is absolute maximum ratings for the junction temperature;  $V_{IN} \cdot I_{GND}$  can be ignored due to its small value.

$T_{J(max)}$  is +150°C,  $\theta_{JA}$  is 200°C/W, no heatsink is required since the package alone will dissipate enough heat to satisfy these requirements, unless the calculated value for power dissipation exceeds the limit.


Example (3.0V version):

$$I_{OUT} = 300\text{mA}, T_A = +50^\circ\text{C}, V_{IN(Max)} \text{ is:}$$

$$(150^\circ\text{C} - 50^\circ\text{C}) / (0.3\text{A} \cdot 200^\circ\text{C/W}) + 3.0\text{V} = 4.67\text{V}$$

Therefore, for good performance, please make sure that the input voltage is less than 4.67V without heatsink when  $T_A = +50^\circ\text{C}$ .

## Ordering Information

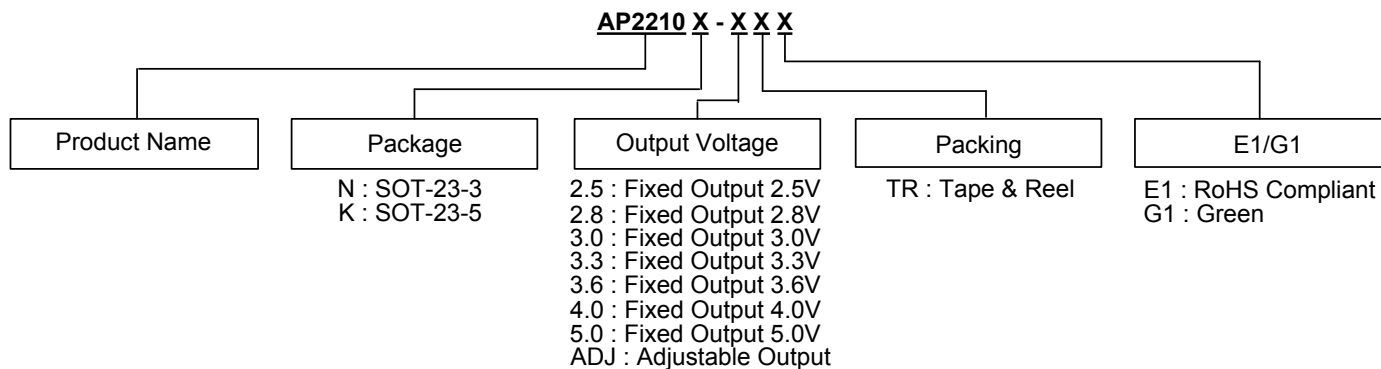


| Package  | Temperature Range | Part Number                  |                 | Marking ID     |       | Packing          |
|----------|-------------------|------------------------------|-----------------|----------------|-------|------------------|
|          |                   | RoHS Compliant               | Green           | RoHS Compliant | Green |                  |
| SOT-23-3 | -40°C to +85°C    | AP2210N-2.8TRE1<br>(Note 11) | AP2210N-2.8TRG1 | EH3            | GH3   | 3000/Tape & Reel |
|          |                   | AP2210N-3.0TRE1<br>(Note 11) | AP2210N-3.0TRG1 | EH4            | GH4   | 3000/Tape & Reel |
|          |                   | AP2210N-3.3TRE1<br>(Note 11) | AP2210N-3.3TRG1 | EH5            | GH5   | 3000/Tape & Reel |
|          |                   | —                            | AP2210N-3.6TRG1 | —              | GB7   | 3000/Tape & Reel |
|          |                   | —                            | AP2210N-4.0TRG1 | —              | GC7   | 3000/Tape & Reel |
|          |                   | —                            | AP2210N-5.0TRG1 | —              | GH9   | 3000/Tape & Reel |
| SOT-23-5 | -40°C to +85°C    | AP2210K-2.5TRE1<br>(Note 11) | —               | E5C            | —     | 3000/Tape & Reel |
|          |                   | AP2210K-2.8TRE1<br>(Note 11) | AP2210K-2.8TRG1 | E5F            | G5F   | 3000/Tape & Reel |
|          |                   | AP2210K-3.0TRE1<br>(Note 11) | AP2210K-3.0TRG1 | E5H            | G5H   | 3000/Tape & Reel |
|          |                   | AP2210K-3.3TRE1<br>(Note 11) | AP2210K-3.3TRG1 | E5K            | G5K   | 3000/Tape & Reel |
|          |                   | —                            | AP2210K-3.6TRG1 | —              | G5I   | 3000/Tape & Reel |
|          |                   | —                            | AP2210K-4.0TRG1 | —              | G5J   | 3000/Tape & Reel |
|          |                   | —                            | AP2210K-5.0TRG1 | —              | G5L   | 3000/Tape & Reel |
|          |                   | —                            | AP2210K-ADJTRG1 | —              | G5M   | 3000/Tape & Reel |

Notes: 11. Not recommended for new design.

## Marking Information

### (1) SOT-23-3


(Top View)



 : Logo  
 XXX: Marking ID  
 (See Ordering Information)

### (2) SOT-23-5


(Top View)

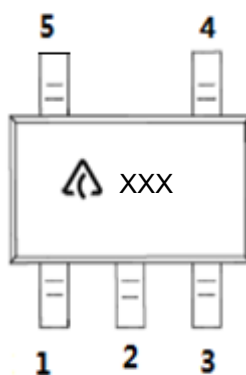

 : Logo  
 XXX: Marking ID  
 (See Ordering Information)


**Package Outline Dimensions** (All dimensions in mm(inch).)

(1) Package Type: SOT-23-3

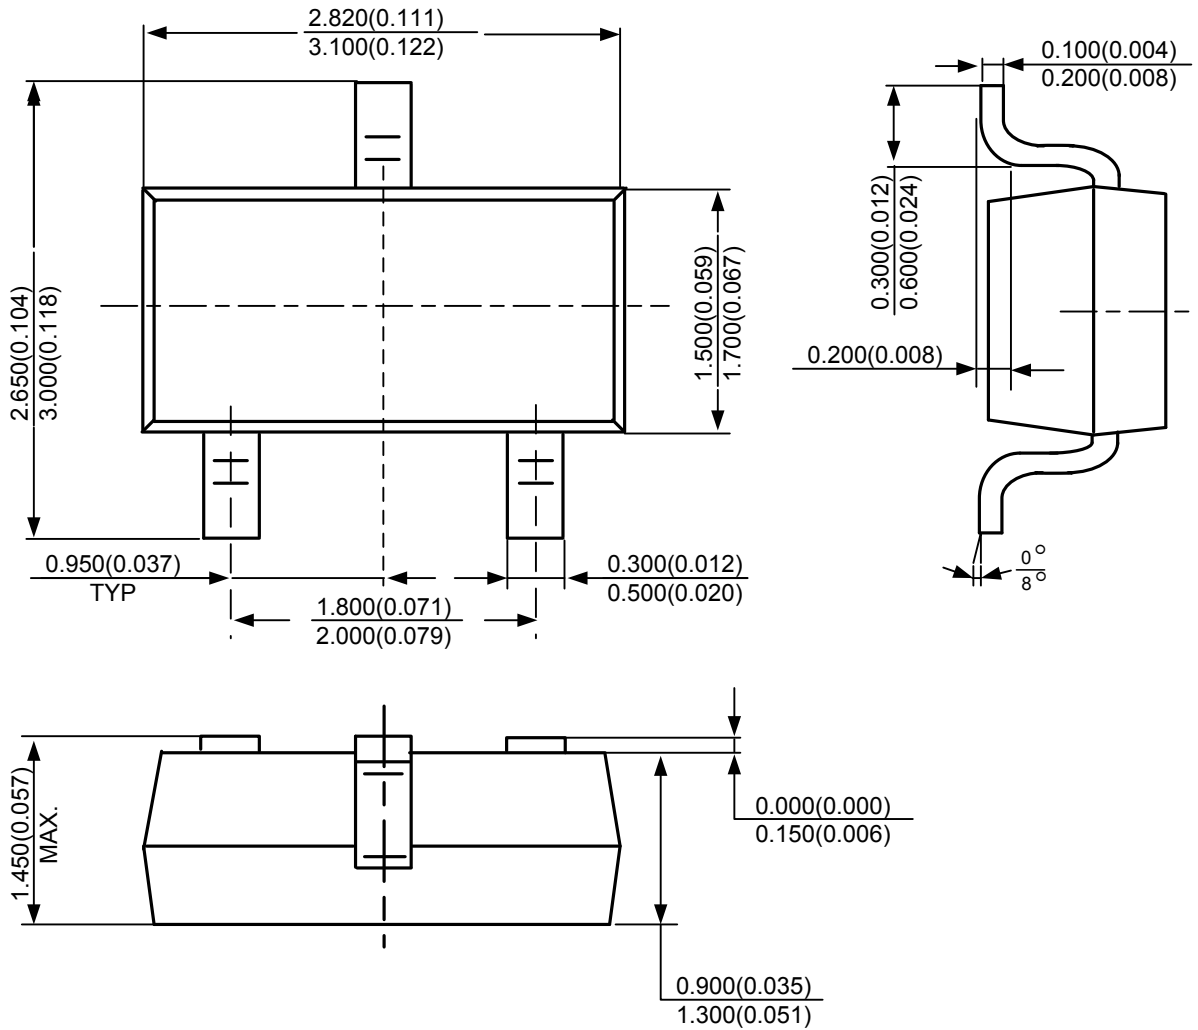


**Package Outline Dimensions** (Cont. All dimensions in mm(inch).)

(2) Package Type: SOT-23-5

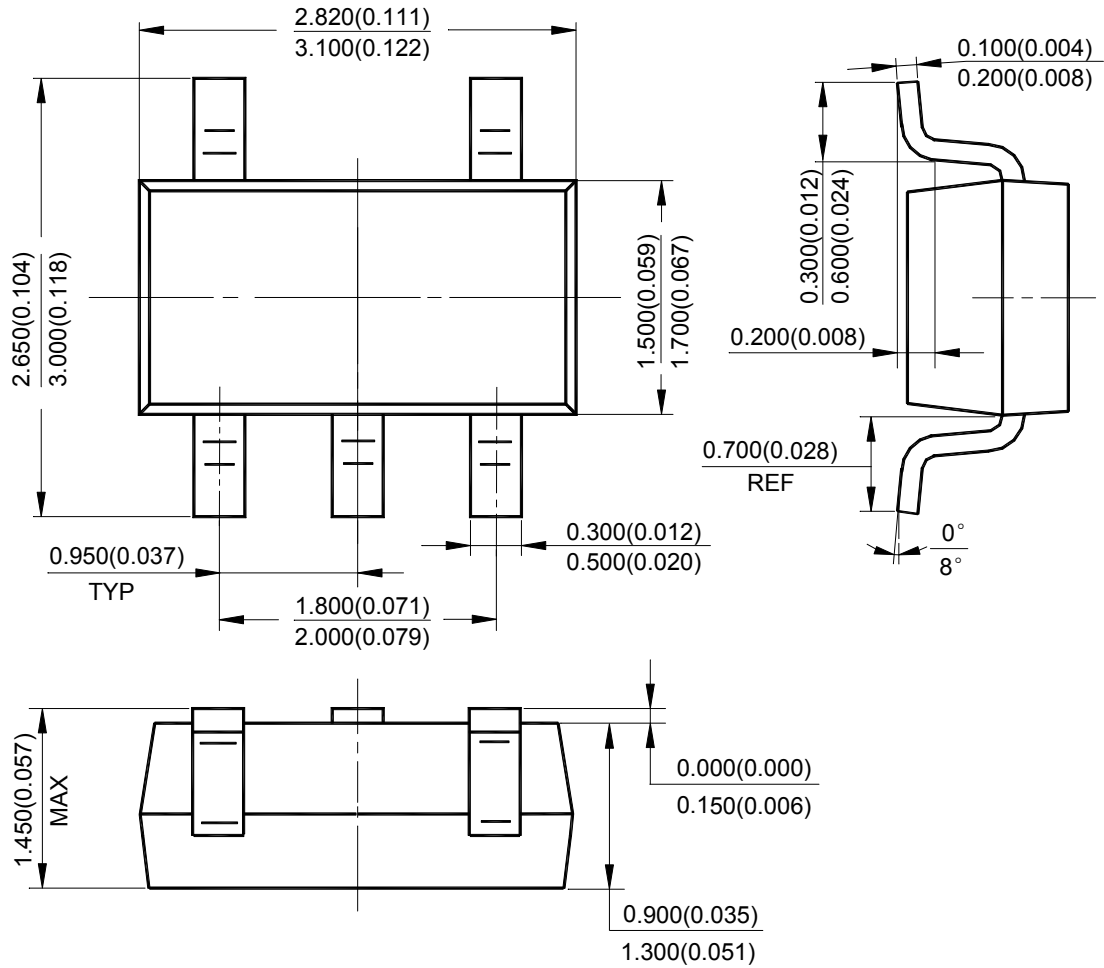

## Suggested Pad Layout


(1) Package Type: SOT-23-3

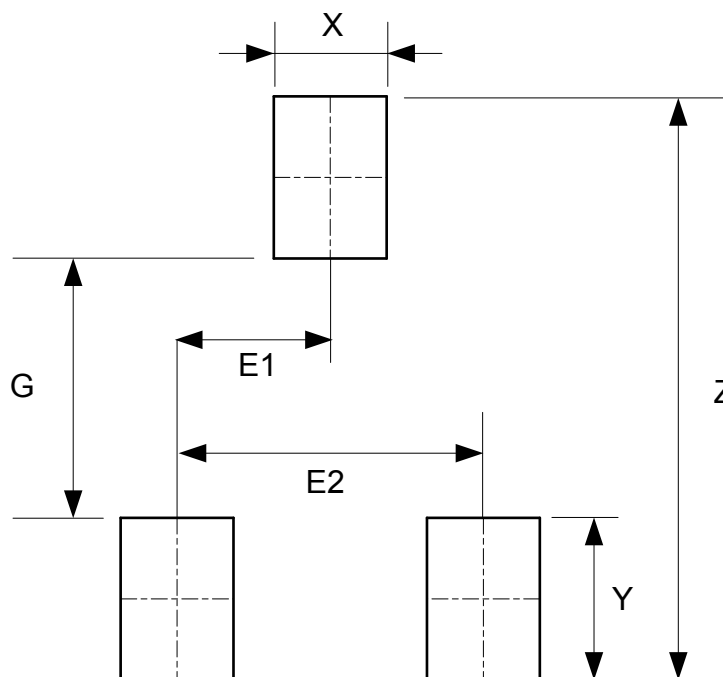

| Dimensions | Z<br>(mm)/(inch) | G<br>(mm)/(inch) | X<br>(mm)/(inch) | Y<br>(mm)/(inch) | E1<br>(mm)/(inch) | E2<br>(mm)/(inch) |
|------------|------------------|------------------|------------------|------------------|-------------------|-------------------|
| Value      | 3.600/0.142      | 1.600/0.063      | 0.700/0.028      | 1.000/0.039      | 0.950/0.037       | 1.900/0.075       |

## Suggested Pad Layout (Cont.)

(2) Package Type: SOT-23-5

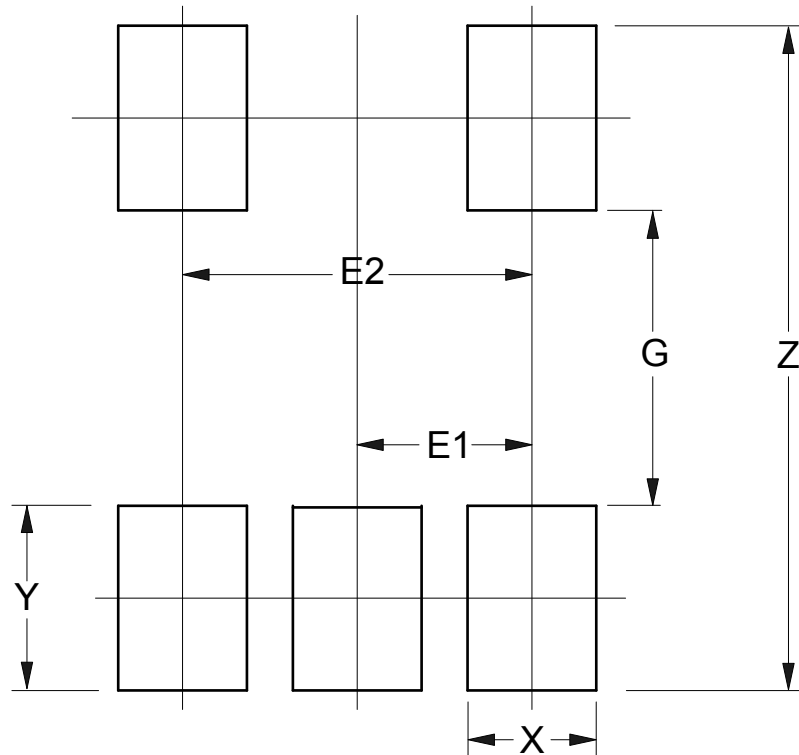

| Dimensions | Z<br>(mm)/(inch) | G<br>(mm)/(inch) | X<br>(mm)/(inch) | Y<br>(mm)/(inch) | E1<br>(mm)/(inch) | E2<br>(mm)/(inch) |
|------------|------------------|------------------|------------------|------------------|-------------------|-------------------|
| Value      | 3.600/0.142      | 1.600/0.063      | 0.700/0.028      | 1.000/0.039      | 0.950/0.037       | 1.900/0.075       |

**IMPORTANT NOTICE**

1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

[www.diodes.com](http://www.diodes.com)