


Female terminal




Model No.	Applicable wire range		Q'ty/reel
	Conductor (mm ²)	Insulation O.D. (mm)	
SHCM-A03T-P025	0.3 to 0.5	1.4 to 1.9	5,000
SHCM-A04T-P025	0.21	1.5	5,000
Material and Finish			
Copper alloy, tin-plated			

Female connector


Single row

Inner lock type


• 3 circuits

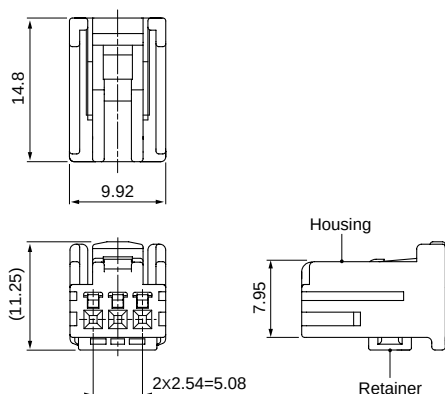


• 4 circuits

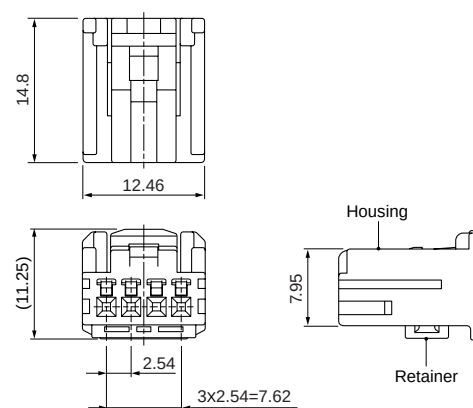


• 5 circuits

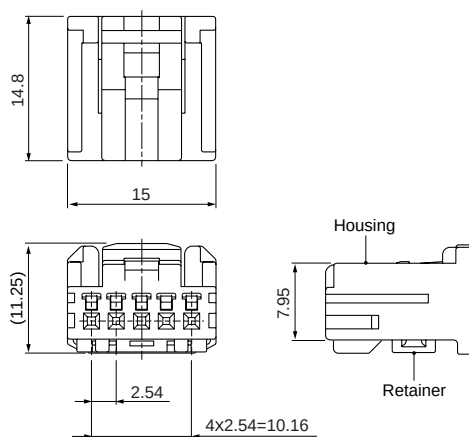

• 6 circuits

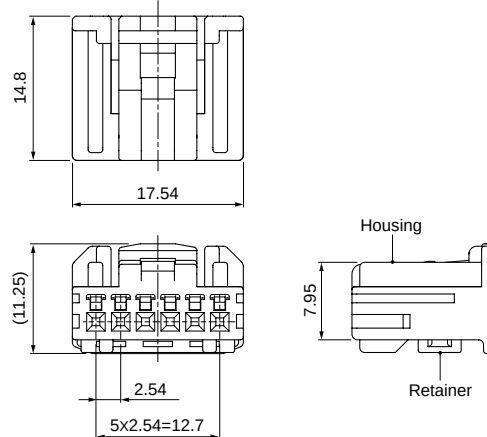


• 12 circuits

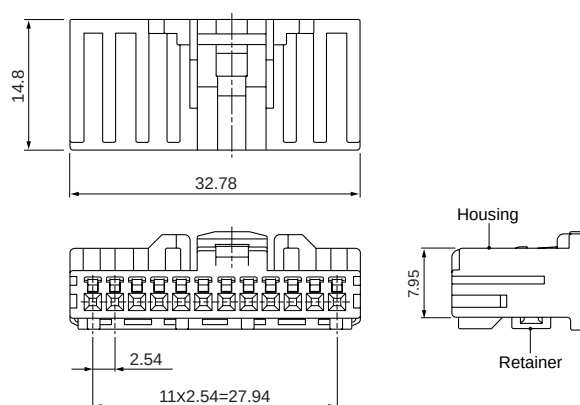


Female connector


Single row
Inner lock type
● 6 circuits (W/CPA type)

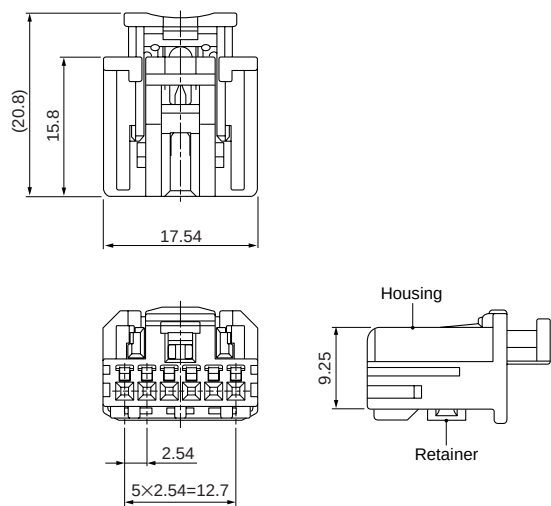


Outer lock type
● 5 circuits

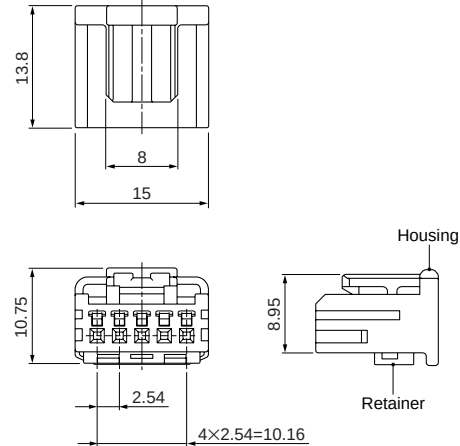

Dual row
Inner lock type
● 8 circuits

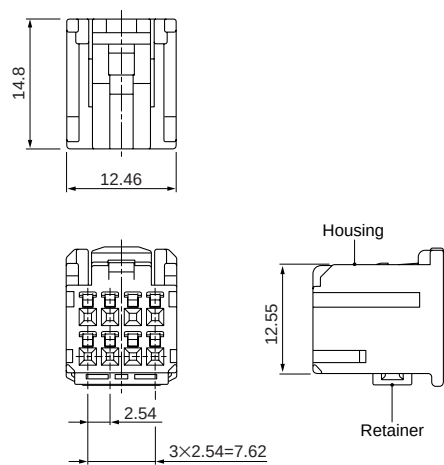

● 9 circuits

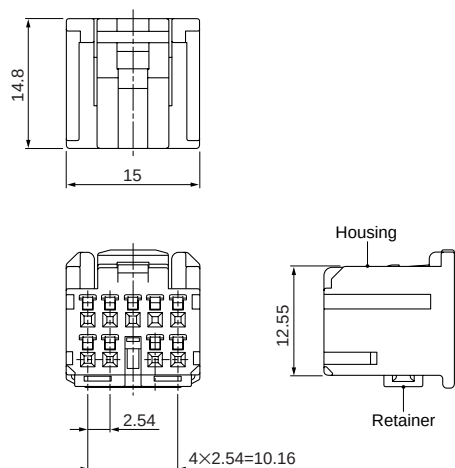

Single row

Type	Circuits	Model No.	Q'ty/box	Housing Color
Inner lock	3	HCMPB-03-K	800	Black
		HCMPB-03-S	800	White
	4	HCMPB-04-K	600	Black
		HCMPB-04-H	600	Gray
		HCMPB-04-S	600	Natural (White)
	5	HCMPB-A05-K	8,000	Black
		HCMPB-A05-S	500	Natural (White)
	6	HCMPB-06-K	400	Black
		HCMPB-06-S	400	Natural (White)
	12	HCMPB-12-K	200	Black
	*12	HCMPB-A12-K	200	Black
Inner lock (W/CPA)	6	HCMPB-C06A-K	4,500	Black
		HCMPB-C06A-S	4,500	Natural (White)
Outer lock	5	HCMPB-05-K	500	Black
		HCMPB-05-S	500	Natural (White)

Material and Finish

Housing: PBT
Retainer: PBT, Blue
CPA (Only for 6 circuits with CPA): Glass-filled PBT, Red

*Additional keying

Dual row

Circuits	Model No.	Q'ty/box	Housing Color
8	HCMDBP-08-K	400	Black
	HCMDBP-08-S	400	Natural (White)
9	HCMDBP-09-K	400	Black


Material and Finish

Housing: PBT
Retainer: PBT, Blue


Male connector (Top entry type)

Inner lock type


• 3 circuits

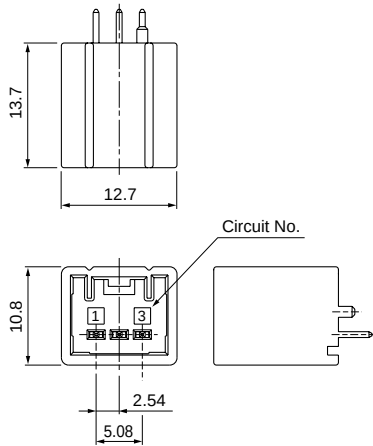

• 5 circuits

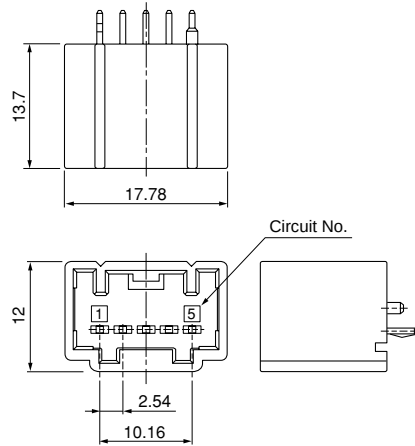


• 6 circuits

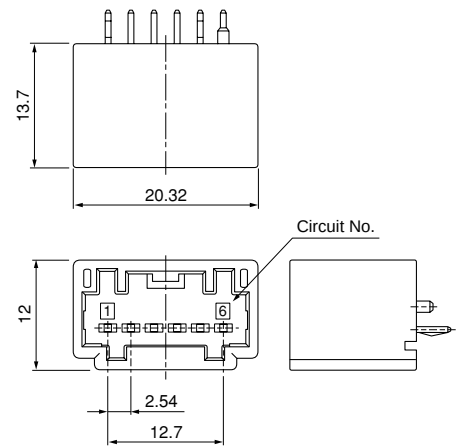


Screw hole

• 4 circuits

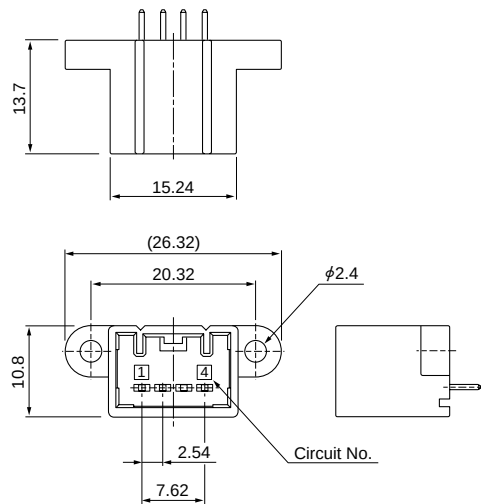


• 5 circuits

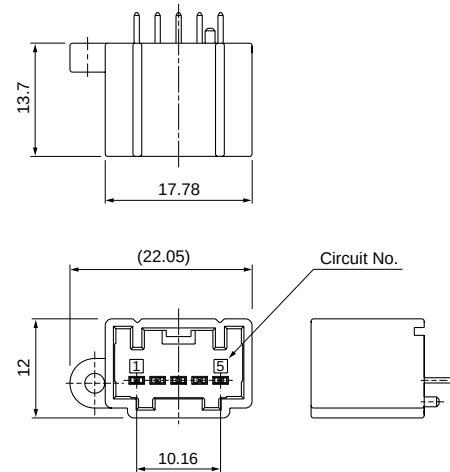

Outer lock type

• 5 circuits

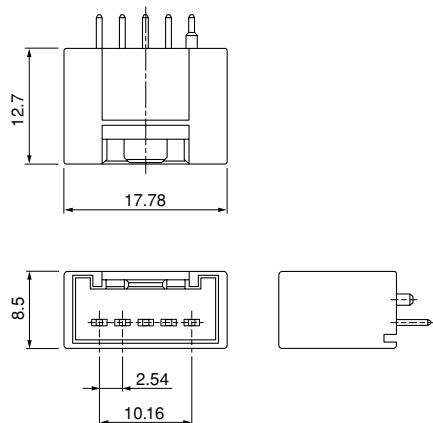

Type	Circuits	Model No.	Q'ty/box	Housing Color
Inner lock	3	B03B-HCMKS	480	Black
		B03B-HCMSS	480	Natural (White)
	5	B05B-AHCMKK	288	Black
		B05B-AHCMKS	288	Natural (White)
	6	B06B-HCMKK	240	Black
		B06B-HCMSK	240	Natural (White)
Inner lock (Screw hole)	4	B04B-HCMKS-R	240	Black
		B04B-HCMKS-RA	240	Black
		B04B-HCMKS-2R	240	Black
	5	B05B2-AHCMKS-A	270	Black
Outer lock	5	B05B-HCMKS-R	432	Black
		B05B-HCMSS-R	432	Natural (White)

Material and Finish

Housing: Glass-filled PBT
Pin: Brass, tin-plated


HCM CONNECTOR

Male connector


(Side entry type)

Reinforcement type


● 3 circuits (S03B1-HCMKS)

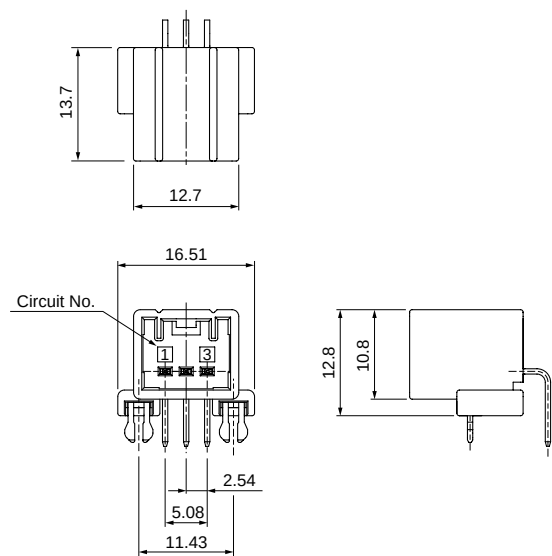

● 3 circuits (S04B1A-HCMKS)

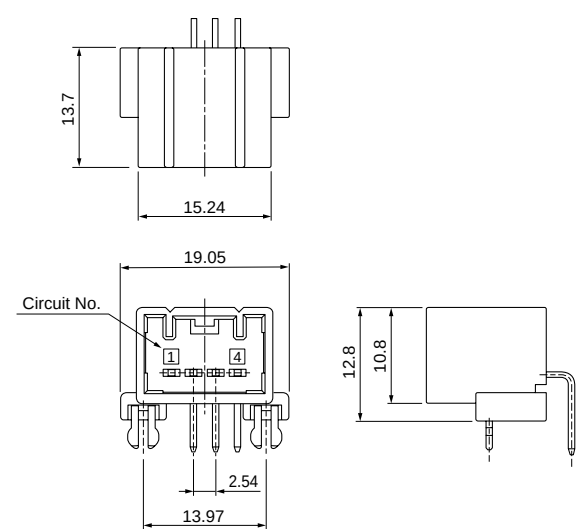

● 4 circuits

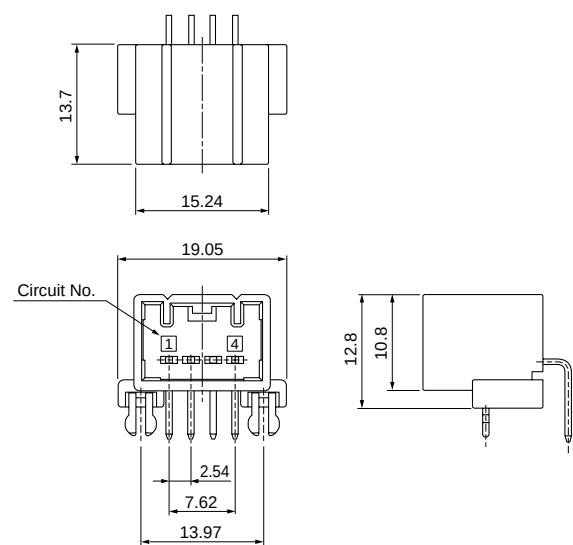


Circuits	Model No.	Q'ty/box	Housing Color
3	S03B1-HCMKS	180	Black
	S04B1A-HCMKS	165	Black
4	S04B1-HCMKS	165	Black
	S04B1-HCMSS	165	Natural (White)

Material and Finish

Housing: Glass-filled PBT

Pin: Brass, tin-plated

Male terminal

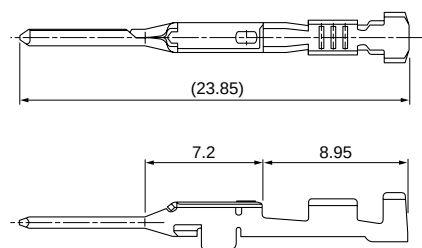


Model No.	Applicable wire range		Q'ty/reel
	Conductor (mm ²)	Insulation O.D. (mm)	
SHCMW-A03T-040	0.3 to 0.5	≤1.9	5,000

Material and Finish


Brass, tin-plated (reflow treatment)

Male connector (Wire-to-wire)

Single row
● 5 circuits

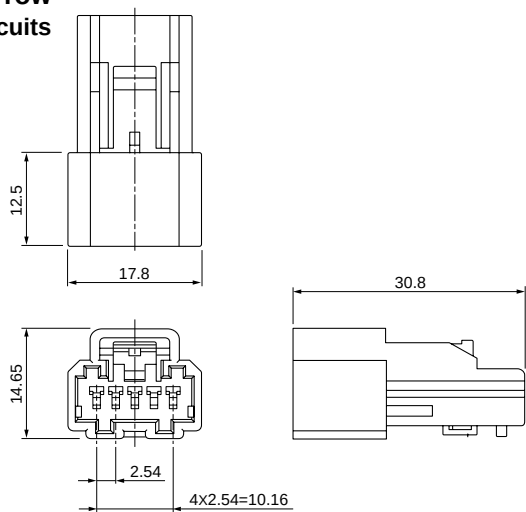


Dual row
● 4 circuits

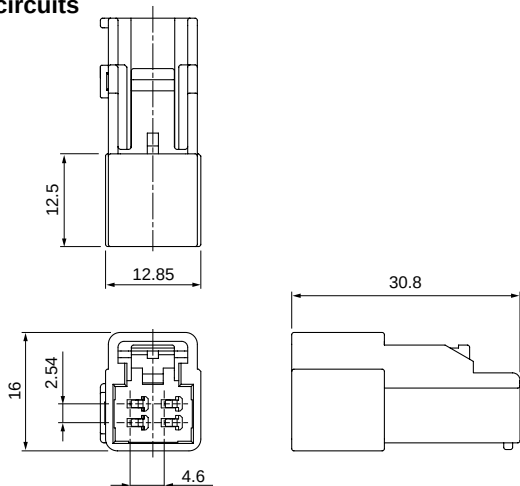


Female connector

Single row
● 5 circuits

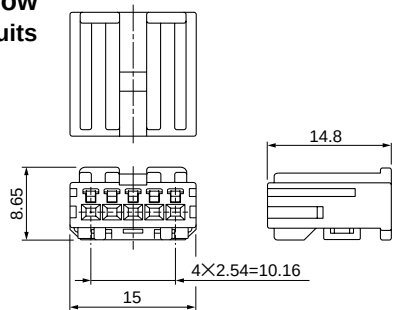

Dual row
● 4 circuits

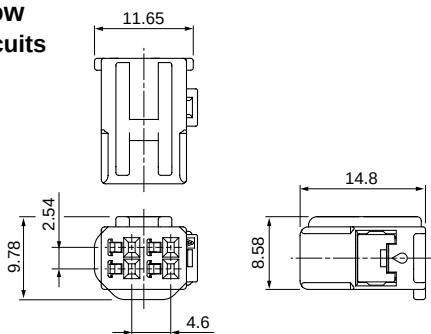


Type	Circuits	Model No.	Q'ty/box	Housing Color
Single row	5	HCMWSB-05-K	200	Black
Dual row	4	HCMDWSB-04-S	250	Natural (White)
Material and Finish				
Housing: PBT				
Retainer: PBT, Blue				

Type	Circuits	Model No.	Q'ty/box	Housing Color
Single row	5	HCMWPB-05-K	500	Black
Dual row	4	HCMDWPB-04-S	13,000	Natural (White)
		HCMDWPB-04-K	13,000	Black
Material and Finish				
Housing: PBT				
Retainer: PBT, Blue				


PC board layout

Top entry type


• 3 circuits




• 4 circuits (with screw hole)

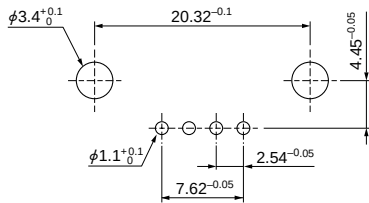


• 5 circuits



• 5 circuits (with screw hole)

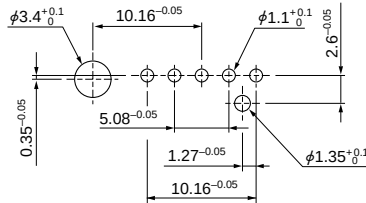


• 6 circuits




Side entry type (with reinforcement)


• 3 circuits



• 3 circuits (with 4 circuits housing)



• 4 circuits

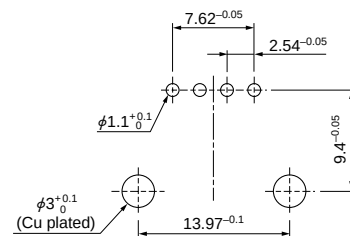


Note: 1. Tolerances are non-cumulative.


2. Hole dimensions differ according to the type of PC board and piercing method.
The dimensions above should serve as guideline. Contact JST for details.

Assembly layout


Top entry type

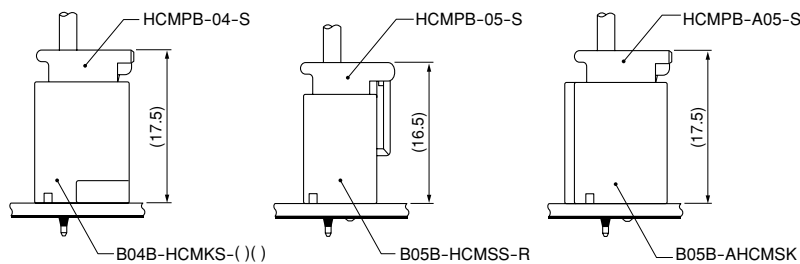

Side entry type

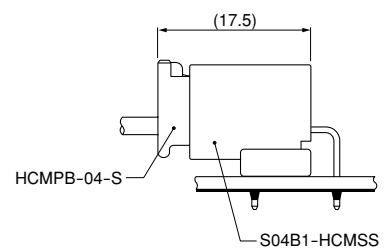

Wire-to-wire type

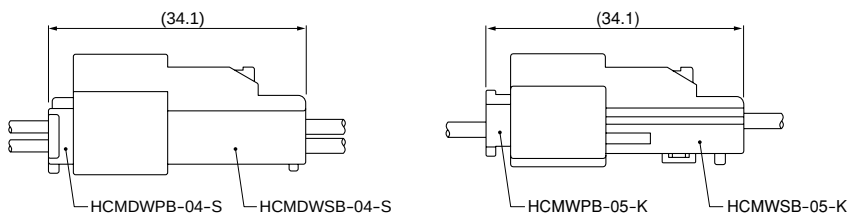

Crimping machine, Applicator

Strip terminal	Crimping machine	Crimp applicator MKS-L	
		Dies	Crimp applicator with dies
SHCM-A03T-P025	AP-K2N	MK/SHCM-A03-025	APL MK SHCM-A03-025
SHCM-A04T-P025		MK/SHCM-A04-025	APL MK SHCM-A04-025
SHCMW-A03T-040		MK/SHCMW-A03-040	APL MK SHCMW-A03-040

Note: When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.