
CLF5030NI-D type

L FREQUENCY CHARACTERISTICS

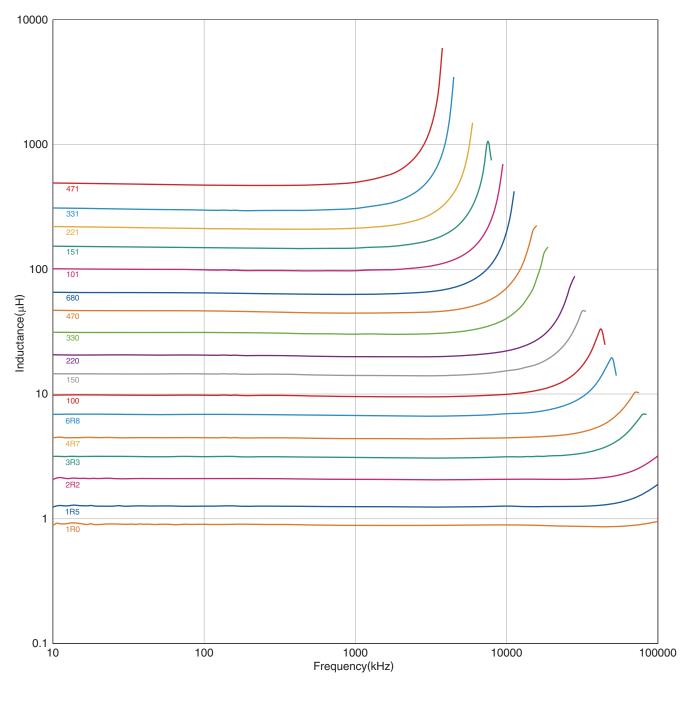

Measurement equipment


Product No.	Manufacturer		
4294A	Keysight Technologies		
de Enviève la cetaria a construction de la cetaria de la construction de la construction de la construction de			

* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (2/5)

CLF5030NI-D type

■ INDUCTANCE VS. DC BIAS CHARACTERISTICS

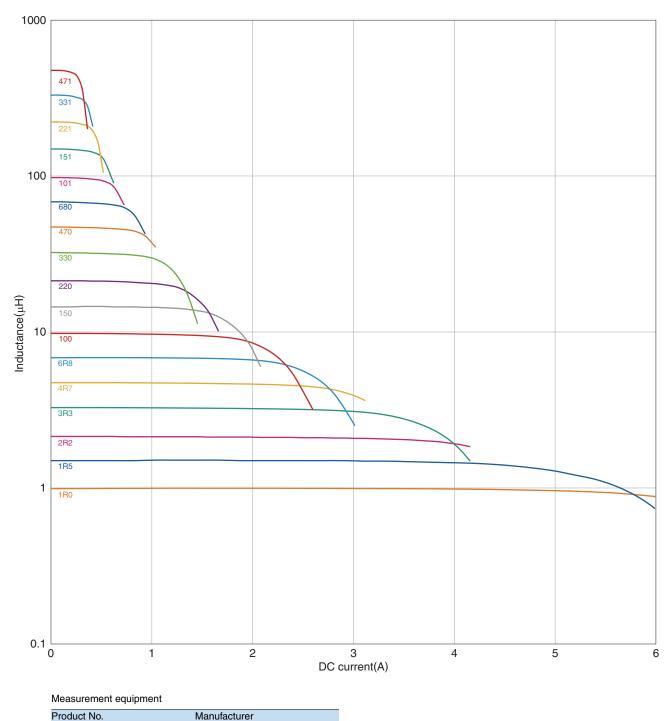

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.

 (3/5)

 Please note that the contents may change without any prior notice due to reasons such as upgrading.

 20200706


4285A+42841A+42842C


* Equivalent measurement equipment may be used.


Keysight Technologies

CLF5030NI-D type

SHAPE & DIMENSIONS








Dimensions in mm

PACKAGING STYLE




Dimensions in mm

RECOMMENDED LAND PATTERN

RECOMMENDED REFLOW PROFILE



Dimensions in mm



Туре	А	В	К
CLF5030NI-D	5.7	5.4	3.6

PACKAGE QUANTITY


TAPE DIMENSIONS

Package quantity 2000 pcs/reel

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

	Operating temperature range*	Storage temperature range**	Individual weight	
	–55 to +150 °C	–55 to +150 °C	0.24 g	
*	Operating temperature range includes self-temperature rise.			

** The storage temperature range is for after the assembly.

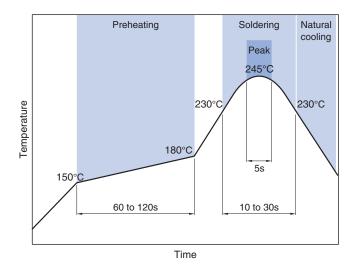

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (4/5)

20200706

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

⚠ REMINDERS

- The storage period is less than 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).
- If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- O Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- O Do not use products that have received any excessive mechanical shock such as by being dropped.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- O Do not expose the products to magnets or magnetic fields.
- O The performance of the product may deteriorate if coating materials are used, thus please assess the situation beforehand by taking this factor into consideration.
- O Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products described in this catalog are intended to be installed in automobiles or automotive electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) and to be used in automobiles (including the case where the said automotive product is mounted in a vehicle) or standard applications as general electronic equipment in automotive applications or standard applications as general electronic equipment in automotive or general electronic equipment including the said product is intended to be used in this specification, while the said automotive or general electronic equipment including the said product is intended to be used in the usual operation and usage methods, respectively. Other than automotive or automotive products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality requires a more stringent level of safety or reliability, or whose failure, malfunction or defect could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (5/5) Please note that the contents may change without any prior notice due to reasons such as upgrading.

20200706