

RoHS Compliant

Features

- Distributed constant type LC filter. Prevents ringing caused by circuit impedance. Suitable for high speed digital circuits and video signal lines.
- Stable noise attenuation over wide frequency ranges.
- Low profile (H=0.85mm max.) suitable for miniature electronic equipments.
- First class auto-placement

Applications

- PCs, Laser Printers, Cellular Phone, Clock Data Lines for LCD Display
- High Speed Video Signal Circuits and Interface Circuits
- High Speed Digital Circuits
- Anti-Noise Solution
- Achieves Effective Noise Suppression in Noisy High Speed Circuits without Signal Waveform Distortion

How to Order

KNA 32 050 - W 3
① ② ③ ④ ⑤

① Series

② Size EIA (EIAJ)
32 :1206 (3216)

③ Frequency

050	50MHz	200	200MHz
100	100MHz		

*Frequency at Attenuation typical 3dB, max. 6dB

④ Taping Direction (See Fig.1)

W: Standard

⑤ Quantity per Reel

3	3000pcs.
---	----------


Specifications

Part Number	Cut off Freq. (MHz)	Capacitance (+25/-20%) (pF)	20dB Attenuation (Typical)	Rated current(mA)	Rated voltage(VDC)
KNA32050	50MHz	115pF	350 – 850MHz	100mA	25VDC
KNA32075	75MHz	82pF	400 – 900MHz	100mA	25VDC
KNA32100	100MHz	65pF	450 – 950MHz	100mA	25VDC
KNA32150	150MHz	45pF	600–1100MHz	100mA	25VDC
KNA32200	200MHz	35pF	700–1200MHz	100mA	25VDC

Operating Temperature: -25 to 85(°C)


Dimensions

(Unit : mm)

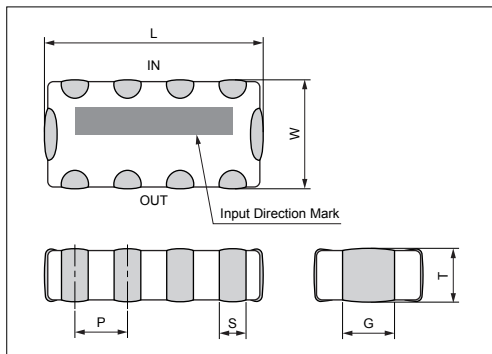


	KNA32
L	3.2±0.2
W	1.6±0.2
T	0.75±0.1
P	0.8
S	0.35±0.15
G	0.80±0.20

Frequency Characteristics

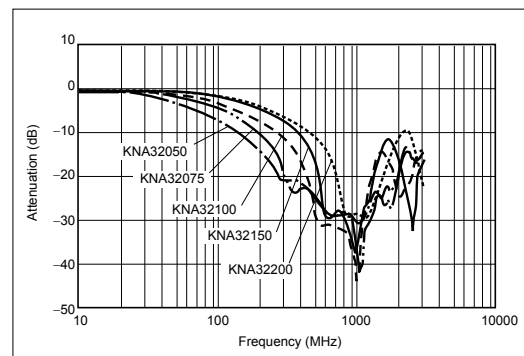

Recommended Land Pattern


(Unit : mm)

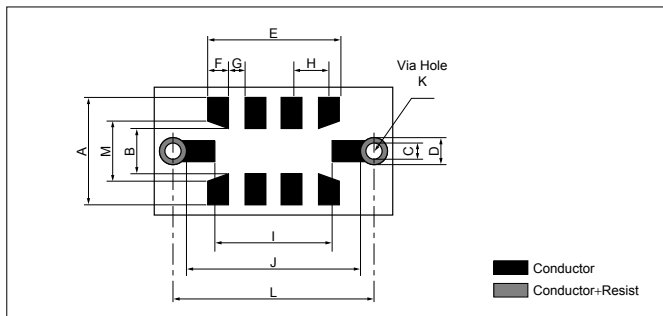

Packaging Specification (Fig.1)

- Taping (3,000/reel)

(Unit : mm)

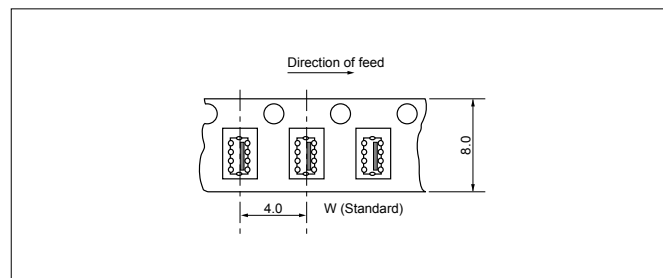

CODE	A	B	C	D	E	F	G	H	I	J	K	L	M
DIMENSION	2.2	1.0	0.4	0.6	2.8	0.4	0.4	0.8	2.6	3.8	0.3 to 0.4	4.2	1.3