

Raychem Circuit Protection
308 Constitution Drive
Menlo Park, CA 94025-1164
800-227-4856
FAX 800-227-4866

RAYCHEM
PolySwitch®
PTC Devices
Overcurrent Protection Device

PRODUCT: miniSMDC150

DOCUMENT: SCD 24264
PCN: 439545
REV LETTER: F
REV DATE: OCTOBER 25, 2000
PAGE NO.: 1 OF 1

Specification Status: RELEASED

Maximum Electrical Rating

Voltage: 6V_{DC}

Short Circuit Current: 100A

Notes:

1. All terminations are tin/lead plated.
2. Devices can be wave soldered.
3. Drawing not to scale

Marking:

— Manufacturer's Mark
— Part Identification

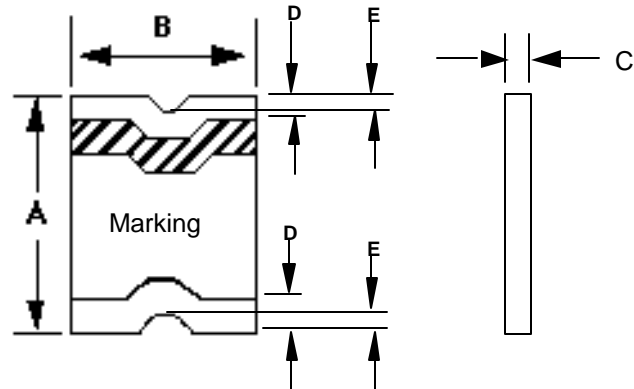


TABLE I. DIMENSIONS:

	A		B		C		D	E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MIN	MAX
mm:	4.37	4.73	3.07	3.41	0.28	0.48	0.25	0.20	0.50
in:	(0.172)	(0.186)	(0.121)	(0.134)	(0.011)	(0.019)	(0.010)	(0.008)	(0.020)

TABLE II. PERFORMANCE RATINGS:

IHOLD ** RATED CURRENT	HOLD CURRENT AT TEMPERATURE**				TIME TO TRIP ** @ 8.0A	RESISTANCE VALUES		**TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT - 40°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 55°C HOLD	SECONDS AT 20°C MAX		OHMS AT 20°C MIN	OHMS AT 20°C MAX*	WATTS AT 20°C MAX
1.5	2.30	1.50	1.00	0.5		0.040	0.110	0.8

* Maximum resistance is measured 1 hour after reflow.

**Values Specified were determined using PCB's with 0.030"X1.5 ounce copper traces.

Reference Documents: PS300, E. N. SMD1.0x

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.