



Customer Information Sheet

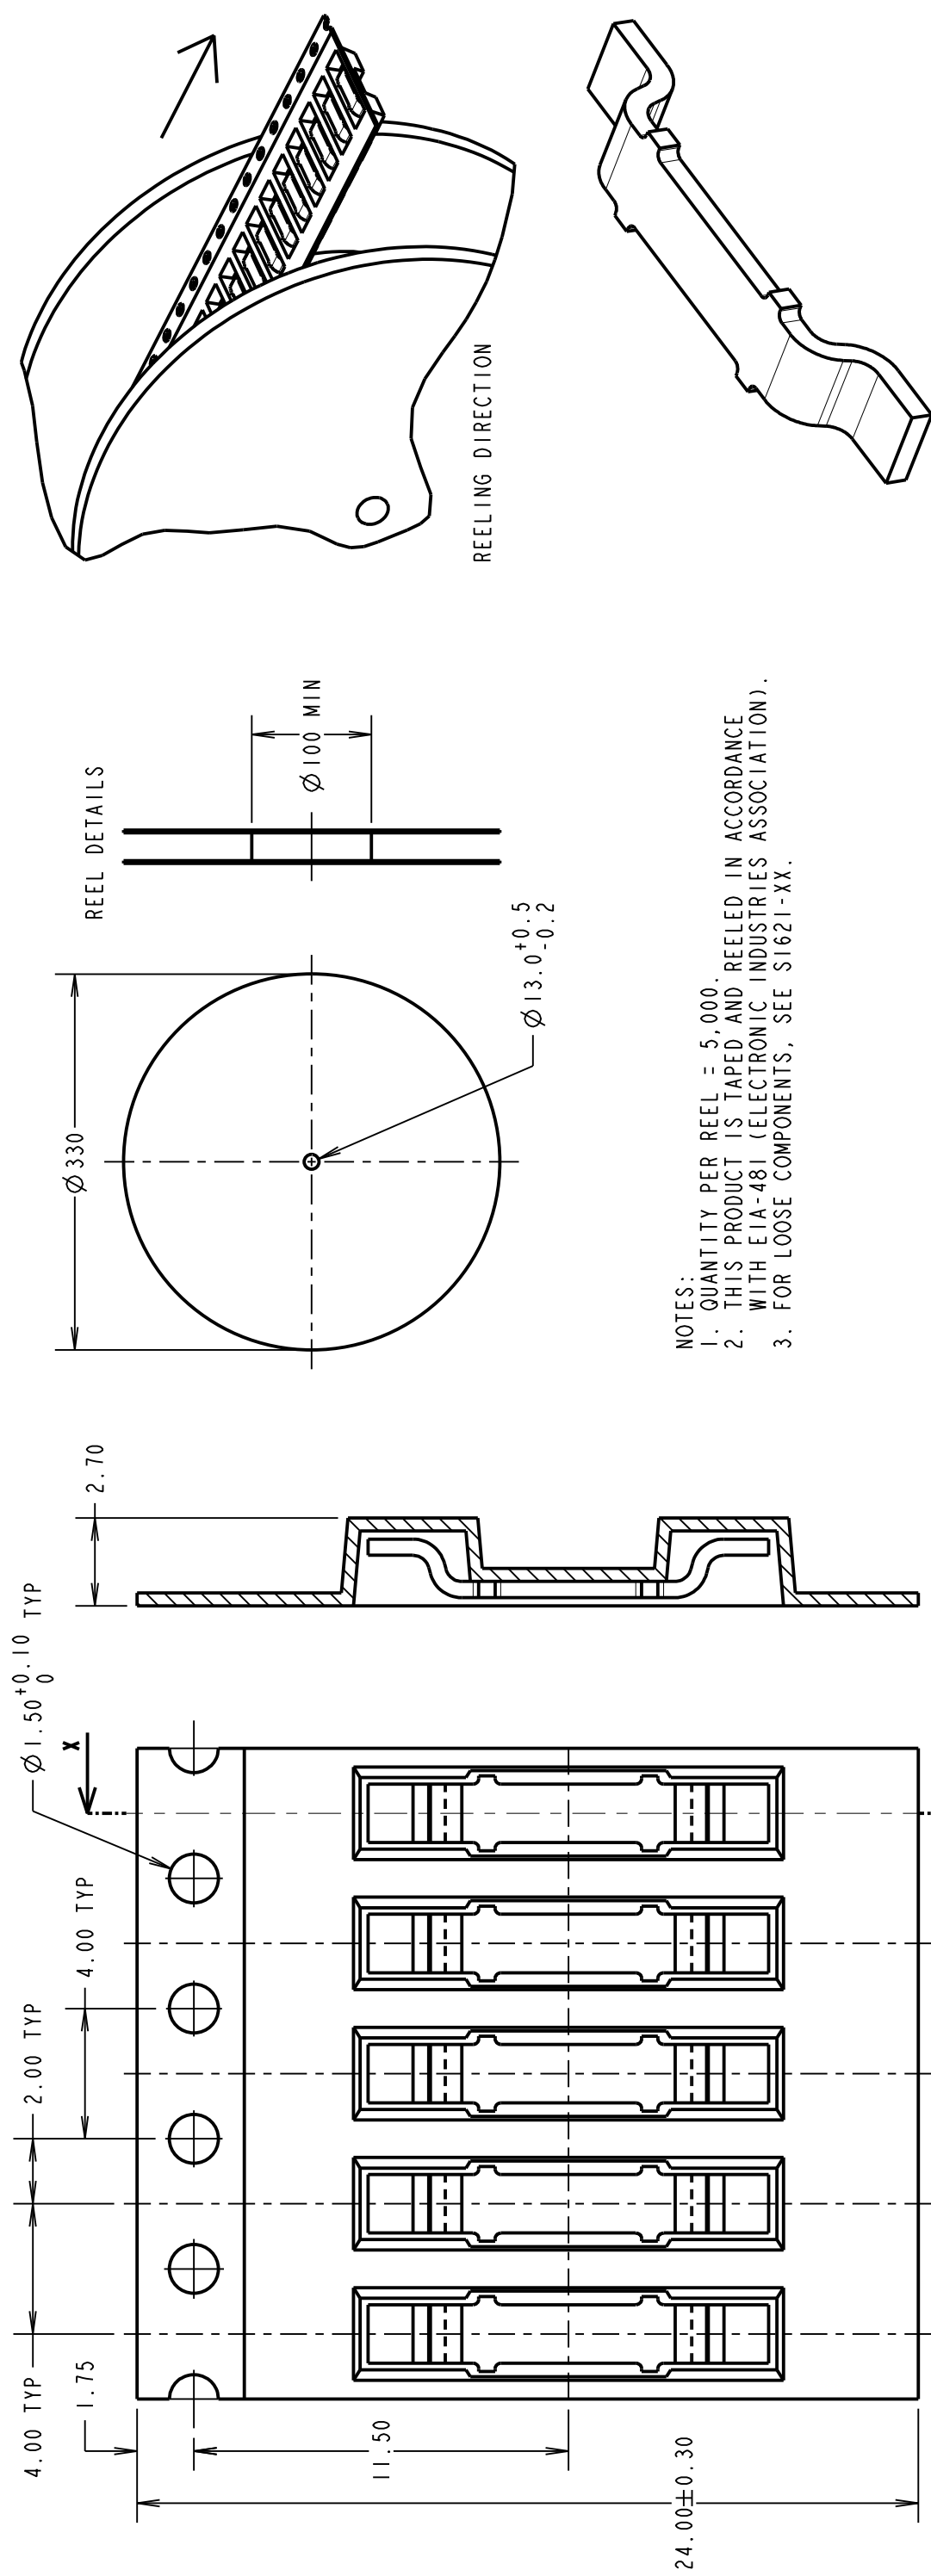

COMPONENT SPECIFICATION:
MATERIAL = BRASS CW508L 1/2 HARD
FINISH
06 = 4 μ 90/10 TIN/LEAD
46 = 4 μ 100% TIN
ELECTRICAL:
CURRENT RATING = 10A (30°C TEMP RISE)
CONTACT RESISTANCE = 20m Ω MAX
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°C TO +125°C

ORDER CODE:
SI62I-XXR

FINISH ————
06 = 4 μ 90/10 TIN/LEAD OVER NICKEL
46 = 3 μ 100% TIN OVER NICKEL

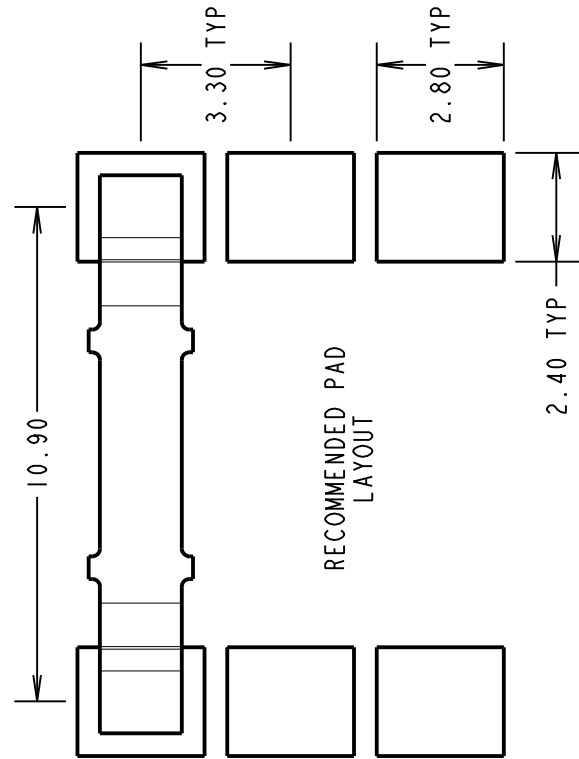

MSP	9	16.10.15	13113
NAME	ISS.	DATE	C/NOTE
APPROVED: M. PERREN			
CHECKED: S. BENNETT			
DRAWN: W. J. BOURNE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN www.harwin.com technical@harwin.com	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.	TOLERANCES X. = ±1mm X.X = ±0.50mm X.XX = ±0.10mm X.XXX = ±0.01mm ANGLES = ±5° UNLESS STATED	MATERIAL:	TITLE:	DRAWING NUMBER: S1621-XXR	SHT 2 OF 2
			FINISH:			
			S/AREA:	mm ²		
SEE ABOVE						