

PROD. NO.
SEE NOTES

NOTES:

1.MATERIAL:

HOUSING: THERMOPLASTIC. UL 94V-0 RATED, COLOR: BLACK.
CONTACT: COPPER ALLOY.
SHELL: COPPER ALLOY
MYLAR: KAPTON TAPE.
2.FINISH:

CONTACT: UNDERPLATED 50u"MIN. NICKEL OVERALL
100u" MIN. MATTE TIN PLATED ON SOLDERING AREA,
SELECTIVE GOLD PLATED ON CONTACT AREA.

SHIELD: CODE N: NICKEL 40u" ~120u" PLATED OVERALL.

T: SELECTIVE 60u" MIN. MATTE TIN ON LEGS OVER 40u" ~120u" NICKEL.

3.10033526--X3212XLF MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBE
IN GS-22-008 AND ITS HSG WILL WITHSTAND EXPOSE TO 260 DEGREE C
PEAK TEMPERATURE FOR 10 SECONDS IN A IR REFLOW APPLICATION.

4. PRODUCT SPEC: GS-12-174 ; PACKAGE SPEC: GS-14-873.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.



Property of FCL. Copyright FCL.

Tous droits strictement reserves. Reproduction ou communication a des tiers
Interdite sous quelque forme que ce soit sans autorisation eerte du proprietaire.

Propriete de c FCL. Droits de reproduction FCL.

5. PRODUCT ORDERING DATA :

FOR LEAD-FREE

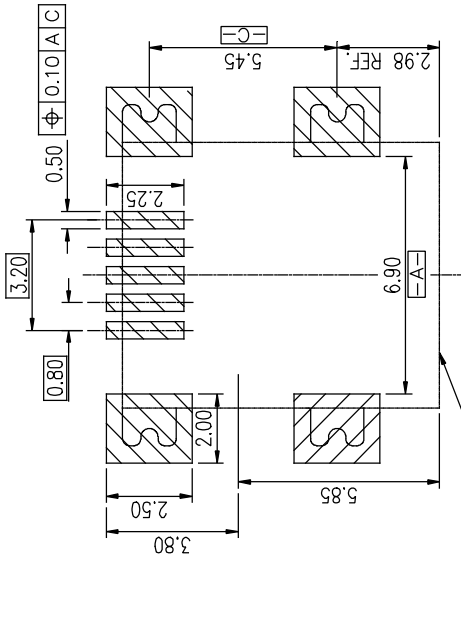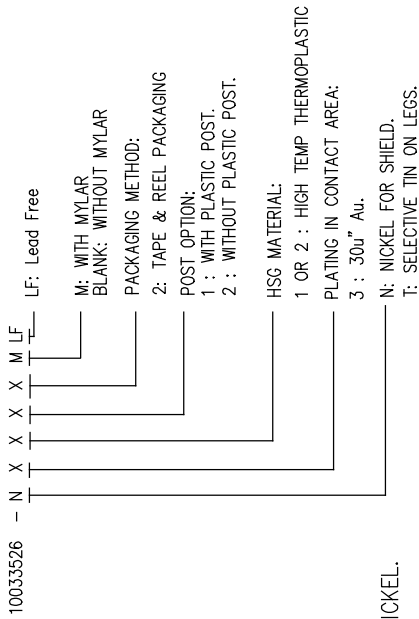

CONNECTOR
PROFILE

RECOMMENDED PCB LAYOUT FOR 10033526-XXX2X
GENERAL TOLERANCE + / -0.05mm



www.fclconnect.com

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	
ltr	ecn no	dr	date	linear	.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 0" ±2"	projection	title
N				angles			
				dr	JASON HSU 12/27/10	MM	product family 511
				engr	JASON HSU 12/27/10		size dwg no
				chr	GARY HSIEH 12/27/10		code TWN
				appd	JOSEPH HSIA 12/27/10		sheet 2 of 2
sheet	revision					scale	10033526
index	sheet					N/A	A4

ACAD