
ABSOLUTE MAXIMUM RATINGS


(Note 1)

 $INTV_{CC}$, DRV_{CC} , V_{OUT} LCL, V_{OUT} ($V_{OUT} \le 3.3V$ with Remote Sense Amp) -0.3V to 6V PLLIN, TRACK/SS, MPGM, MARGO, MARG1, PGOOD, f_{SFT} -0.3V to INTV_{CC} + 0.3V RUN-0.3V to 5V

V _{IN}	0.3V to 28V
V _{OSNS} ⁺ , V _{OSNS} ⁻	
Operating Temperature Range	(Note 2)40°C to 85°C
Junction Temperature	125°C
Storage Temperature Range	55°C to 125°C

PIN CONFIGURATION

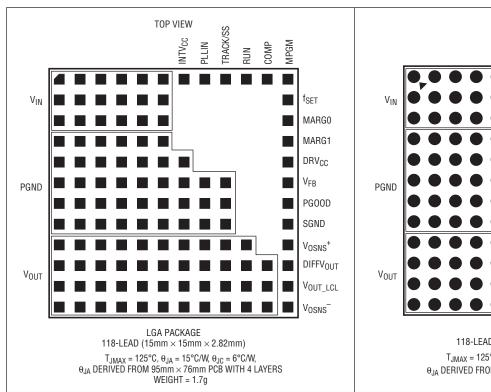

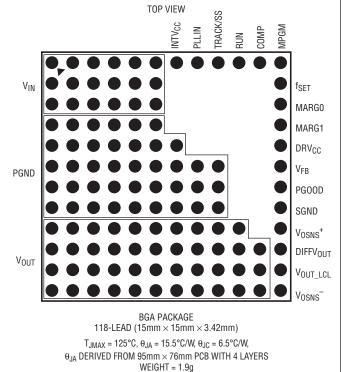

WEIGHT = 1.9g

ORDER INFORMATION

LEAD FREE FINISH	TRAY	PART MARKING*	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LTM4601HVEV#PBF	LTM4601HVEV#PBF	LTM4601HVV	118-Lead (15mm \times 15mm \times 2.82mm) LGA	-40°C to 85°C
LTM4601HVIV#PBF	LTM4601HVIV#PBF	LTM4601HVV	118-Lead (15mm \times 15mm \times 2.82mm) LGA	–40°C to 85°C
LTM4601HVEY#PBF	LTM4601HVEY#PBF	LTM4601HVY	118-Lead (15mm × 15mm × 3.42mm) BGA	-40°C to 85°C
LTM4601HVIY#PBF	LTM4601HVIY#PBF	LTM4601HVY	118-Lead (15mm × 15mm × 3.42mm) BGA	-40°C to 85°C

Consult LTC Marketing for parts specified with wider operating temperature ranges. *The temperature grade is identified by a label on the shipping container.

For more information on lead free part marking, go to: http://www.linear.com/leadfree/

This product is only offered in trays. For more information go to: http://www.linear.com/packaging/

4601hvfb



ELECTRICAL CHARACTERISTICS The \bullet denotes the specifications which apply over the -40° C to 85° C temperature range (Note 2), otherwise specifications are at $T_A = 25^{\circ}$ C, $V_{IN} = 12$ V, per typical application (front page) configuration, $R_{SET} = 40.2$ k.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
$\overline{V_{\text{IN(DC)}}}$	Input DC Voltage		•	4.5		28	V
V _{OUT(DC)}	Output Voltage (With Remote Sense Amp)	$C_{IN} = 10 \mu F \times 3$, $C_{OUT} = 200 \mu F$, $R_{SET} = 40.2 k$ $V_{IN} = 12 V$, $V_{OUT} = 1.5 V$, $I_{OUT} = 0$	•	1.478	1.5	1.522	V
Input Specifica	tions						
V _{IN(UVLO)}	Undervoltage Lockout Threshold	I _{OUT} = 0A			3.2	4	V
INRUSH(VIN)	Input Inrush Current at Startup	$I_{OUT} = 0A. V_{OUT} = 1.5V$ $V_{IN} = 5V$ $V_{IN} = 12V$			0.6 0.7		A A
IQ(VIN,NO LOAD)	Input Supply Bias Current	$\begin{aligned} &V_{IN} = 12 \text{V, No Switching} \\ &V_{IN} = 12 \text{V, } V_{OUT} = 1.5 \text{V, Switching Continuous} \\ &V_{IN} = 5 \text{V, No Switching} \\ &V_{IN} = 5 \text{V, } V_{OUT} = 1.5 \text{V, Switching Continuous} \\ &Shutdown, RUN = 0, VIN = 12 \text{V} \end{aligned}$			3.8 38 2.5 42 22		mA mA mA mA
I _{S(VIN)}	Input Supply Current	$egin{array}{c} V_{IN} = 12V, \ V_{OUT} = 1.5V, \ I_{OUT} = 12A \ V_{IN} = 12V, \ V_{OUT} = 3.3V, \ I_{OUT} = 12A \ V_{IN} = 5V, \ V_{OUT} = 1.5V, \ I_{OUT} = 12A \ \end{array}$			1.81 3.63 4.29		A A A
INTV _{CC}	V _{IN} = 12V, RUN > 2V	No Load		4.7	5	5.3	V
Output Specific	ations						
loutdc	Output Continuous Current Range	V _{IN} = 12V, V _{OUT} = 1.5V (Note 5)		0		12	A
$\frac{\Delta V_{OUT(LINE)}}{V_{OUT}}$	Line Regulation Accuracy	V _{OUT} = 1.5V, I _{OUT} = 0A, V _{IN} from 4.5V to 28V	•			0.3	%
$\frac{\Delta V_{OUT(LOAD)}}{V_{OUT}}$	Load Regulation Accuracy	V_{OUT} = 1.5V, I_{OUT} = 0A to 12A, with RSA (Note 5) V_{IN} = 5V V_{IN} = 12V	•			0.25 0.25	% %
V _{OUT(AC)}	Output Ripple Voltage	$I_{OUT} = 0A$, $C_{OUT} = 2 \times 100 \mu F$ X5R Ceramic $V_{IN} = 12 V$, $V_{OUT} = 1.5 V$ $V_{IN} = 5 V$, $V_{OUT} = 1.5 V$			20 18		mV _{P-P}
f_S	Output Ripple Voltage Frequency	I _{OUT} = 5A, V _{IN} = 12V, V _{OUT} = 1.5V			850		kHz
$\Delta V_{OUT(START)}$	Turn-On Overshoot	$C_{OUT} = 200 \mu F$, $V_{OUT} = 1.5 V$, $I_{OUT} = 0 A$, TRACK/SS = 10nF $V_{IN} = 12 V$ $V_{IN} = 5 V$			20 20		mV mV
t _{START}	Turn-On Time	C_{OUT} = 200 μ F, V_{OUT} = 1.5V, TRACK/SS = 0pen, I_{OUT} = 1A Resistive Load V_{IN} = 12V V_{IN} = 5V			0.5 0.5		ms ms
$\Delta V_{ m OUTLS}$	Peak Deviation for Dynamic Load	Load: 0% to 50% to 0% of Full Load, $C_{OUT} = 2 \times 22 \mu F$ Ceramic, $470 \mu F$ 4V Sanyo POSCAP $V_{IN} = 12 V$ $V_{IN} = 5 V$			35 35		mV mV
t _{SETTLE}	Settling Time for Dynamic Load Step	Load: 0% to 50%, or 50% to 0% of Full Load V _{IN} = 12V			25		μѕ
Гоитрк	Output Current Limit	C _{OUT} = 200µF Ceramic V _{IN} = 12V, V _{OUT} = 1.5V V _{IN} = 5V, V _{OUT} = 1.5V			17 17		A A

LTM4601HV

ELECTRICAL CHARACTERISTICS The \bullet denotes the specifications which apply over the -40° C to 85° C temperature range (Note 2), otherwise specifications are at $T_A = 25^{\circ}$ C, $V_{IN} = 12$ V, per typical application (front page) configuration, $R_{SET} = 40.2$ k.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Remote Sense A	Amp (Note 3)						
V _{OSNS} ⁺ , V _{OSNS} ⁻ CM Range	Common Mode Input Voltage Range	V _{IN} = 12V, RUN > 2V		0		INTV _{CC} – 1	V
DIFFV _{OUT} Range	Output Voltage Range	V _{IN} = 12V, DIFFV _{OUT} Load = 100k		0		INTV _{CC} – 1	V
V _{OS}	Input Offset Voltage Magnitude					1.25	mV
A_V	Differential Gain				1		V/V
GBP	Gain Bandwidth Product				3		MHz
SR	Slew Rate				2		V/µs
R _{IN}	Input Resistance	V _{OSNS} ⁺ to GND			20		kΩ
CMRR	Common Mode Rejection Mode				100		dB
Control Stage			•				
V_{FB}	Error Amplifier Input Voltage Accuracy	$I_{OUT} = 0A$, $V_{OUT} = 1.5V$	•	0.594	0.6	0.606	V
V_{RUN}	RUN Pin On/Off Threshold			1	1.5	1.9	V
I _{TRACK/SS}	Soft-Start Charging Current	V _{TRACK/SS} = 0V		-1.0	-1.5	-2.0	μА
t _{ON(MIN)}	Minimum On Time	(Note 4)			50	100	ns
t _{OFF(MIN)}	Minimum Off Time	(Note 4)			250	400	ns
R _{PLLIN}	PLLIN Input Resistance				50		kΩ
I _{DRVCC}	Current into DRV _{CC} Pin	V _{OUT} = 1.5V, I _{OUT} = 1A, DRV _{CC} = 5V			18	25	mA
R _{FBHI}	Resistor Between V _{OUT_LCL} and V _{FB}			60.098	60.4	60.702	kΩ
V_{MPGM}	Margin Reference Voltage				1.18		V
V _{MARG0} , V _{MARG1}	MARG0, MARG1 Voltage Thresholds				1.4		V
PGOOD Output							
ΔV_{FBH}	PGOOD Upper Threshold	V _{FB} Rising		7	10	13	%
ΔV_{FBL}	PGOOD Lower Threshold	V _{FB} Falling		-7	-10	-13	%
$\Delta V_{FB(HYS)}$	PGOOD Hysteresis	V _{FB} Returning			1.5		%

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The LTM4601HV is tested under pulsed load conditions such that $T_J \approx T_A$. The LTM4601HVE is guaranteed to meet performance specifications from 0°C to 85°C. Specifications over the -40°C to 85°C operating temperature range are assured by design, characterization and correlation with statistical process controls. The LTM4601HVI is guaranteed over the -40°C to 85°C temperature range.


Note 3: Remote sense amplifier recommended for ≤3.3V output.


Note 4: 100% tested at wafer level only.


Note 5: See output current derating curves for different V_{IN} , V_{OUT} and T_A .

LINEAR TECHNOLOGY


TYPICAL PERFORMANCE CHARACTERISTICS (See Figures 19 and 20 for all curves)








1.2V Transient Response



1.2V AT 6A/µs LOAD STEP C_{OUT} = 3 • 22µF 6.3V CERAMICS 470µF 4V SANYO POSCAP C3 = 100pF

1.5V Transient Response




1.5V AT 6A/µs LOAD STEP

C_{OUT} = 3 • 22µF 6.3V CERAMICS

470µF 4V SANYO POSCAP


C3 = 100pF

1.8V Transient Response




1.8V AT 6A/µs LOAD STEP C_{OUT} = 3 • 22µF 6.3V CERAMICS 470µF 4V SANYO POSCAP C3 = 100pF

2.5V Transient Response



2.5V AT 6A/µs LOAD STEP C_{OUT} = 3 • 22µF 6.3V CERAMICS 470µF 4V SANYO POSCAP C3 = 100pF

3.3V Transient Response




3.3V AT 6A/µs LOAD STEP C_{OUT} = 3 • 22µF 6.3V CERAMICS 470µF 4V SANYO POSCAP C3 = 100pF




TYPICAL PERFORMANCE CHARACTERISTICS (See Figures 19 and 20 for all curves)

Start-Up, $I_{OUT} = 0A$




V_{IN} = 12V V_{OUT} = 1.5V C_{OUT} = 470µF, 3 × 22µF SOFT-START = 10nF

Start-Up, $I_{OUT} = 12A$ (Resistive Load)




 $V_{IN} = 12V$ $V_{OUT} = 1.5V$ $C_{OUT} = 470 \mu \text{F}, 3 \times 22 \mu \text{F}$ SOFT-START = 10 nF

VIN to VOUT Step-Down Ratio




Track, $I_{OUT} = 12A$




 $V_{IN} = 12V$ V_{OUT} = 1.5V C_{OUT} = 470μF, 3 × 22μF SOFT-START = 10nF

Short-Circuit Protection, $I_{OUT} = 0A$



Short-Circuit Protection, $I_{OUT} = 12A$



 $V_{OUT} = 1.5V$ $C_{OUT} = 470 \mu \text{F}, 3 \times 22 \mu \text{F}$ SOFT-START = 10 nF

PIN FUNCTIONS (See Package Description for Pin Assignment)

 V_{IN} (Bank 1): Power Input Pins. Apply input voltage between these pins and PGND pins. Recommend placing input decoupling capacitance directly between V_{IN} pins and PGND pins.

V_{OUT} (**Bank 3**): Power Output Pins. Apply output load between these pins and PGND pins. Recommend placing output decoupling capacitance directly between these pins and PGND pins. See Figure 17.

PGND (Bank 2): Power ground pins for both input and output returns.

V_{OSNS}⁻ (**Pin M12**): (–) Input to the Remote Sense Amplifier. This pin connects to the ground remote sense point. The remote sense amplifier is used for $V_{OUT} \le 3.3V$. Tie to INTV_{CC} if not used.

 V_{OSNS}^+ (Pin J12): (+) Input to the Remote Sense Amplifier. This pin connects to the output remote sense point. The remote sense amplifier is used for $V_{OUT} \le 3.3$ V. Tie to ground if not used.

DIFFV_{OUT} (**Pin K12**): Output of the Remote Sense Amplifier. This pin connects to the V_{OUT_LCL} pin. Leave floating if remote sense amplifier is not used.

DRV_{CC} (**Pin E12**): This pin normally connects to INTV_{CC} for powering the internal MOSFET drivers. This pin can be biased up to 6V from an external supply with about 50mA capability, or an external circuit as shown in Figure 18. This improves efficiency at the higher input voltages by reducing power dissipation in the module.

INTV_{CC} (Pin A7): This pin is for additional decoupling of the 5V internal regulator.

PLLIN (Pin A8): External Clock Synchronization Input to the Phase Detector. This pin is internally terminated to SGND with a 50k resistor. Apply a clock with a high level above 2V and below INTV_{CC}. See the Applications Information section.

TRACK/SS (Pin A9): Output Voltage Tracking and Soft-Start Pin. When the module is configured as a master output, then a soft-start capacitor is placed on this pin to ground to control the master ramp rate. A soft-start capacitor can be used for soft-start turn on of a stand alone regulator. Slave operation is performed by putting a resistor divider from the master output to ground, and connecting the center point of the divider to this pin. See the Applications Information section.

MPGM (Pin A12): Programmable Margining Input. A resistor from this pin to ground sets a current that is equal to 1.18V/R. This current multiplied by $10k\Omega$ will equal a value in millivolts that is a percentage of the 0.6V reference voltage. See Applications Information. To parallel LTM4601HVs, each requires an individual MPGM resistor. Do not tie MPGM pins together.

f_{SET} (**Pin B12**): Frequency Set Internally to 850kHz. An external resistor can be placed from this pin to ground to increase frequency. See the Applications Information section for frequency adjustment.

 V_{FB} (Pin F12): The Negative Input of the Error Amplifier. Internally, this pin is connected to V_{OUT_LCL} pin with a 60.4k precision resistor. Different output voltages can be programmed with an additional resistor between V_{FB} and SGND pins. See the Applications Information section.

MARGO (Pin C12): This pin is the LSB logic input for the margining function. Together with the MARG1 pin it will determine if margin high, margin low or no margin state is applied. The pin has an internal pull-down resistor of 50k. See the Applications Information section.

MARG1 (Pin D12): This pin is the MSB logic input for the margining function. Together with the MARG0 pin it will determine if margin high, margin low or no margin state is applied. The pin has an internal pull-down resistor of 50k. See the Applications Information section.

PIN FUNCTIONS (See Package Description for Pin Assignment)

SGND (Pin H12): Signal Ground. This pin connects to PGND at output capacitor point. See Figure 17.

COMP (Pin A11): Current Control Threshold and Error Amplifier Compensation Point. The current comparator threshold increases with this control voltage. The voltage ranges from 0V to 2.4V with 0.7V corresponding to zero sense voltage (zero current).

PGOOD (Pin G12): Output Voltage Power Good Indicator. Open-drain logic output that is pulled to ground when the output voltage is not within $\pm 10\%$ of the regulation point, after a 25µs power bad mask timer expires.

RUN (Pin A10): Run Control Pin. A voltage above 1.9V will turn on the module, and when below 1V, will turn off the module. A programmable UVLO function can be accomplished by connecting to a resistor divider from V_{IN} to ground. See Figure 1. This pin has a 5.1V Zener to ground. Maximum pin voltage is 5V. Limit current into the RUN pin to less than 1mA.

 $\textbf{V}_{\textbf{OUT_LCL}}$ (**Pin L12**): $\textbf{V}_{\textbf{OUT}}$ connects directly to this pin to bypass the remote sense amplifier, or DIFFV_{OUT} connects to this pin when remote sense amplifier is used.

SIMPLIFIED BLOCK DIAGRAM

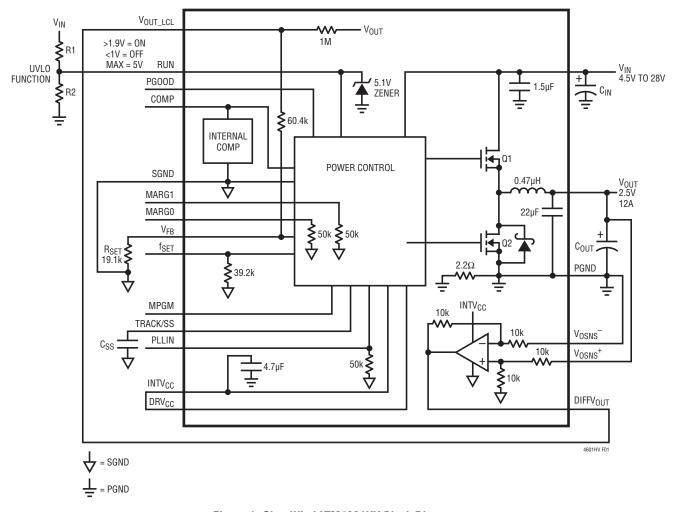


Figure 1. Simplified LTM4601HV Block Diagram

DECOUPLING REQUIREMENTS $T_A = 25^{\circ}C$, $V_{IN} = 12V$. Use Figure 1 configuration.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
C _{IN}	External Input Capacitor Requirement (V _{IN} = 4.5V to 28V, V _{OUT} = 2.5V)	I_{OUT} = 12A, 3× 10 μ F Ceramics	20	30		μF
C _{OUT}	External Output Capacitor Requirement (V _{IN} = 4.5V to 28V, V _{OUT} = 2.5V)	I _{OUT} = 12A	100	200		μF

OPERATION

Power Module Description

The LTM4601HV is a standalone nonisolated switching mode DC/DC power supply. It can deliver up to 12A of DC output current with some external input and output capacitors. This module provides a precisely regulated output voltage programmable via one external resistor from $0.6V_{DC}$ to $5.0V_{DC}$ over a 4.5V to 28V wide input voltage. The typical application schematics are shown in Figures 19 and 20.

The LTM4601HV has an integrated constant on-time current mode regulator, ultralow $R_{DS(0N)}$ FETs with fast switching speed and integrated Schottky diodes. The typical switching frequency is 850kHz at full load. With current mode control and internal feedback loop compensation, the LTM4601HV module has sufficient stability margins and good transient performance under a wide range of operating conditions and with a wide range of output capacitors, even all ceramic output capacitors.

Current mode control provides cycle-by-cycle fast current limit. Besides, foldback current limiting is provided in an overcurrent condition while V_{FB} drops. Internal overvoltage and undervoltage comparators pull the open-drain PGOOD output low if the output feedback voltage exits a $\pm 10\%$ window around the regulation point. Furthermore,

in an overvoltage condition, internal top FET Q1 is turned off and bottom FET Q2 is turned on and held on until the overvoltage condition clears.

Pulling the RUN pin below 1V forces the controller into its shutdown state, turning off both Q1 and Q2. At low load current, the module works in continuous current mode by default to achieve minimum output voltage ripple.

When DRV_{CC} pin is connected to $INTV_{CC}$ an integrated 5V linear regulator powers the internal gate drivers. If a 5V external bias supply is applied on the DRV_{CC} pin, then an efficiency improvement will occur due to the reduced power loss in the internal linear regulator. This is especially true at the high end of the input voltage range.

The LTM4601HV has a very accurate differential remote sense amplifier with very low offset. This provides for very accurate output voltage sensing at the load. The MPGM pin, MARGO pin and MARG1 pin are used to support voltage margining, where the percentage of margin is programmed by the MPGM pin, and MARG0 and MARG1 select margining.

The PLLIN pin provides frequency synchronization of the device to an external clock. The TRACK/SS pin is used for power supply tracking and soft-start programming.

The typical LTM4601HV application circuits are shown in Figures 19 and 20. External component selection is primarily determined by the maximum load current and output voltage. Refer to Table 2 for specific external capacitor requirements for a particular application.

VIN to VOLIT Step-Down Ratios

There are restrictions in the maximum V_{IN} to V_{OUT} step down ratio that can be achieved for a given input voltage. These constraints are shown in the Typical Performance Characteristics curves labeled V_{IN} to V_{OUT} Step-Down Ratio. Note that additional thermal derating may apply. See the Thermal Considerations and Output Current Derating section of this data sheet.

Output Voltage Programming and Margining

The PWM controller has an internal 0.6V reference voltage. As shown in the Block Diagram, a 1M and a 60.4k 0.5% internal feedback resistor connects V_{OUT} and V_{FB} pins together. The V_{OUT_LCL} pin is connected between the 1M and the 60.4k resistor. The 1M resistor is used to protect against an output overvoltage condition if the V_{OUT_LCL} pin is not connected to the output, or if the remote sense amplifier output is not connected to V_{OUT_LCL} . In these cases, the output voltage will default to 0.6V. Adding a resistor R_{SET} from the V_{FB} pin to SGND pin programs the output voltage:

$$V_{OUT} = 0.6V \frac{60.4k + R_{SET}}{R_{SET}}$$

or equivalently:

$$R_{SET} = \frac{60.4k}{\left(\frac{V_{OUT}}{0.6V} - 1\right)}$$

Table 1. R_{SET} Standard 1% Resistor Values vs V_{OUT}

							•	
R_{SET} ($k\Omega$)	Open	60.4	40.2	30.1	25.5	19.1	13.3	8.25
V _{OUT} (V)	0.6	1.2	1.5	1.8	2	2.5	3.3	5

The MPGM pin programs a current that when multiplied by an internal 10k resistor sets up the 0.6V reference \pm offset for margining. A 1.18V reference divided by the RPGM resistor on the MPGM pin programs the current. Calculate $V_{OUT(MARGIN)}$:

$$V_{OUT(MARGIN)} = \frac{\%V_{OUT}}{100} \cdot V_{OUT}$$

where $%V_{OUT}$ is the percentage of V_{OUT} you want to margin, and $V_{OUT(MARGIN)}$ is the margin quantity in volts:

$$R_{PGM} = \frac{V_{OUT}}{0.6V} \cdot \frac{1.18V}{V_{OUT(MARGIN)}} \cdot 10k$$

where R_{PGM} is the resistor value to place on the MPGM pin to ground.

The margining voltage, $V_{OUT(MARGIN)}$, will be added or subtracted from the nominal output voltage as determined by the state of the MARG0 and MARG1 pins. See the truth table below:

MARG1	MARGO	MODE
LOW	LOW	NO MARGIN
LOW	HIGH	MARGIN UP
HIGH	LOW	MARGIN DOWN
HIGH	HIGH	NO MARGIN

Input Capacitors

LTM4601HV module should be connected to a low AC impedance DC source. Input capacitors are required to be placed adjacent to the module. In Figure 20, the 10μ F ceramic input capacitors are selected for their ability to handle the large RMS current into the converter. An input bulk capacitor of 100μ F is optional. This 100μ F capacitor is only needed if the input source impedance is compromised by long inductive leads or traces.

For a buck converter, the switching duty-cycle can be estimated as:

$$D = \frac{V_{OUT}}{V_{IN}}$$



Without considering the inductor ripple current, the RMS current of the input capacitor can be estimated as:

$$I_{\text{CIN(RMS)}} = \frac{I_{\text{OUT(MAX)}}}{\eta\%} \bullet \sqrt{D \bullet (1-D)}$$

In the above equation, $\eta\%$ is the estimated efficiency of the power module. C_{IN} can be a switcher-rated electrolytic aluminum capacitor, OS-CON capacitor or high value ceramic capacitor. Note the capacitor ripple current ratings are often based on temperature and hours of life. This makes it advisable to properly derate the input capacitor, or choose a capacitor rated at a higher temperature than required. Always contact the capacitor manufacturer for derating requirements.

In Figures 19 and 20, the $10\mu F$ ceramic capacitors are together used as a high frequency input decoupling capacitor. In a typical 12A output application, three very low ESR, X5R or X7R, $10\mu F$ ceramic capacitors are recommended. These decoupling capacitors should be placed directly adjacent to the module input pins in the PCB layout to minimize the trace inductance and high frequency AC noise. Each $10\mu F$ ceramic is typically good for 2A to 3A of RMS ripple current. Refer to your ceramics capacitor catalog for the RMS current ratings.

Multiphase operation with multiple LTM4601HV devices in parallel will lower the effective input RMS ripple current due to the interleaving operation of the regulators. Application Note 77 provides a detailed explanation. Refer to Figure 2 for the input capacitor ripple current reduction as a function of the number of phases. The figure provides a ratio of RMS ripple current to DC load current as function of duty cycle and the number of paralleled phases. Pick the corresponding duty cycle and the number of phases to arrive at the correct ripple current value. For example, the 2-phase parallel LTM4601HV design provides 24A at 2.5V

output from a 12V input. The duty cycle is DC = 2.5V/12V = 0.21. The 2-phase curve has a ratio of \sim 0.25 for a duty cycle of 0.21. This 0.25 ratio of RMS ripple current to a DC load current of 24A equals \sim 6A of input RMS ripple current for the external input capacitors.

Output Capacitors

The LTM4601HV is designed for low output ripple voltage. The bulk output capacitors defined as C_{OUT} are chosen with low enough effective series resistance (ESR) to meet the output voltage ripple and transient requirements. C_{OUT} can be a low ESR tantalum capacitor, a low ESR polymer capacitor or a ceramic capacitor. The typical capacitance is $200\mu F$ if all ceramic output capacitors are used. Additional output filtering may be required by the system designer if further reduction of output ripple or dynamic transient spike is required. Table 2 shows a matrix of different output voltages and output capacitors to minimize the voltage droop and overshoot during a $5A/\mu s$ transient. The table optimizes total equivalent ESR and total bulk capacitance to maximize transient performance.




Figure 2. Normalized Input RMS Ripple Current vs Duty Cycle for One to Six Modules (Phases)

LINEAD TECHNOLOGY

Multiphase operation with multiple LTM4601HV devices in parallel will lower the effective output ripple current due to the interleaving operation of the regulators. For example, each LTM4601HV's inductor current in a 12V to 2.5V multiphase design can be read from the Inductor

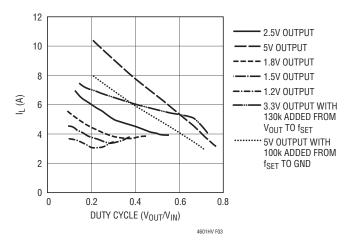


Figure 3. Inductor Ripple Current vs Duty Cycle

Ripple Current vs Duty Cycle graph (Figure 3). The large ripple current at low duty cycle and high output voltage can be reduced by adding an external resistor from f_{SET} to ground which increases the frequency. If the duty cycle is DC = 2.5V/12V = 0.21, the inductor ripple current for 2.5V output at 21% duty cycle is ~6A in Figure 3.

Figure 4 provides a ratio of peak-to-peak output ripple current to the inductor current as a function of duty cycle and the number of paralleled phases. Pick the corresponding duty cycle and the number of phases to arrive at the correct output ripple current ratio value. If a 2-phase operation is chosen at a duty cycle of 21%, then 0.6 is the ratio. This 0.6 ratio of output ripple current to inductor ripple of 6A equals 3.6A of effective output ripple current. Refer to Application Note 77 for a detailed explanation of output ripple current reduction as a function of paralleled phases.

The output ripple voltage has two components that are related to the amount of bulk capacitance and effective series resistance (ESR) of the output bulk capacitance.

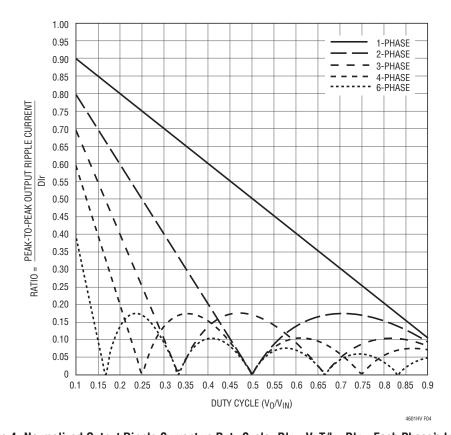


Figure 4. Normalized Output Ripple Current vs Duty Cycle, $DIr = V_0T/L_1$, DIr = Each Phase's Inductor Current



Therefore, the output ripple voltage can be calculated with the known effective output ripple current. The equation: $\Delta V_{OUT(P-P)} \approx (\Delta I_L/(8 \bullet f \bullet m \bullet C_{OUT}) + ESR \bullet \Delta I_L), \text{ where } f \text{ is frequency and } m \text{ is the number of parallel phases. This calculation process can be easily accomplished by using LTpowerCADTM.}$

Fault Conditions: Current Limit and Overcurrent Foldback

LTM4601HV has a current mode controller, which inherently limits the cycle-by-cycle inductor current not only in steady-state operation, but also in response to transients.

To further limit current in the event of an overload condition, the LTM4601HV provides foldback current limiting. If the output voltage falls by more than 50%, then the maximum output current is progressively lowered to about one sixth of its full current limit value. The current limit returns to its nominal value once V_{OUT} and V_{FB} have returned to their nominal values.

Soft-Start and Tracking

The TRACK/SS pin provides a means to either soft-start the regulator or track it to a different power supply. A capacitor on this pin will program the ramp rate of the output voltage. A 1.5µA current source will charge up the external soft-start capacitor to 80% of the 0.6V internal voltage reference plus or minus any margin delta. This will control the ramp of the internal reference and the output voltage. The total soft-start time can be calculated as:

$$t_{SOFTSTART} = 0.8 \cdot (0.6V \pm V_{OUT(MARGIN)}) \cdot \frac{C_{SS}}{1.5 \mu A}$$

When the RUN pin falls below 1.5V, then the TRACK/SS pin is reset to allow for proper soft-start control when the regulator is enabled again. Current foldback and forced continuous mode are disabled during the soft-start process. The soft-start function can also be used to control the output ramp up time, so that another regulator can be easily tracked to it.

Output Voltage Tracking

Output voltage tracking can be programmed externally using the TRACK/SS pin. The output can be tracked up and down with another regulator. The master regulator's output is divided down with an external resistor divider that is the same as the slave regulator's feedback divider. Figure 5 shows an example of coincident tracking. Ratiometric modes of tracking can be achieved by selecting different resistor values to change the output tracking ratio. The master output must be greater than the slave output for the tracking to work. Figure 6 shows the coincident output tracking characteristics.

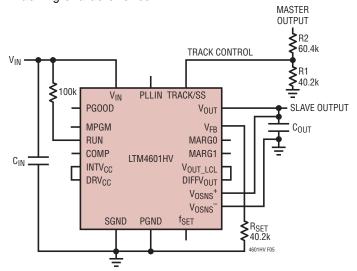


Figure 5. Coincident Tracking Schematic




Figure 6. Coincident Output Tracking Characteristics

TECHNOLOGY TECHNOLOGY

Run Enable

The RUN pin is used to enable the power module. The pin has an internal 5.1V Zener to ground. The pin can be driven with a logic input not to exceed 5V.

The RUN pin can also be used as an undervoltage lock out (UVLO) function by connecting a resistor divider from the input supply to the RUN pin:

$$V_{UVLO} = \frac{R1 + R2}{R2} \bullet 1.5V$$

See Figure 1, Simplified Block Diagram.

Power Good

The PGOOD pin is an open-drain pin that can be used to monitor valid output voltage regulation. This pin monitors a $\pm 10\%$ window around the regulation point and tracks with margining.

COMP Pin

This pin is the external compensation pin. The module has already been internally compensated for most output voltages. Table 2 is provided for most application requirements. LTpowerCAD is available for other control loop optimization.

PLLIN

The power module has a phase-locked loop comprised of an internal voltage controlled oscillator and a phase detector. This allows the internal top MOSFET turn-on to be locked to the rising edge of the external clock. The frequency range is ±30% around the operating frequency of 850kHz. A pulse detection circuit is used to detect a clock on the PLLIN pin to turn on the phase-locked loop. The pulse width of the clock has to be at least 400ns and at least 2V in amplitude. The PLLIN pin must be driven from a low impedance source such as a logic gate located close to the pin. During the start-up of the regulator, the phase-locked loop function is disabled.

INTV_{CC} and DRV_{CC} Connection

An internal low dropout regulator produces an internal 5V supply that powers the control circuitry and DRV_{CC} for driving the internal power MOSFETs. Therefore, if the system does not have a 5V power rail, the LTM4601HV can be directly powered by V_{IN} . The gate driver current through the LDO is about 20mA. The internal LDO power dissipation can be calculated as:

$$P_{LDO_LOSS} = 20 \text{mA} \cdot (V_{IN} - 5V)$$

The LTM4601HV also provides the external gate driver voltage pin DRV $_{CC}$. If there is a 5V rail in the system, it is recommended to connect DRV $_{CC}$ pin to the external 5V rail. This is especially true for higher input voltages. Do not apply more than 6V to the DRV $_{CC}$ pin. A 5V output can be used to power the DRV $_{CC}$ pin with an external circuit as shown in Figure 18.

Parallel Operation of the Module

The LTM4601HV device is an inherently current mode controlled device. Parallel modules will have very good current sharing. This will balance the thermals on the design. The voltage feedback equation changes with the variable N as modules are paralleled:

$$V_{OUT} = 0.6V \bullet \frac{\frac{60.4k}{N} + R_{SET}}{R_{SET}}$$

or equivalently:

$$R_{SET} = \frac{\frac{60.4k}{N}}{\left(\frac{V_{OUT}}{0.6V} - 1\right)}$$

where N is the number of paralleled modules.

Figure 21 shows two LTM4601HV modules used in a parallel design. An LTM4601HV device can be used without the remote sense amplifier.



Thermal Considerations and Output Current Derating

The power loss curves in Figures 7 and 8 can be used in coordination with the load current derating curves in Figures 9 to 16 for calculating an approximate θ_{JA} for the module with various heat sinking methods. Thermal models are derived from several temperature measurements at the bench and thermal modeling analysis. Thermal Application Note 103 provides a detailed explanation of the analysis for the thermal models and the derating curves. Tables 3 and 4 provide a summary of the equivalent θ_{JA} for the noted conditions. These equivalent θ_{JA} parameters are correlated to the measured values, and are improved with air flow. The case temperature is maintained at 100°C

or below for the derating curves. The maximum case temperature of 100°C is to allow for a rise of about 13°C to 25°C inside the μ Module with a thermal resistance θ_{JC} from junction to case between 6°C/W to 9°C/W. This will maintain the maximum junction temperature inside the μ Module below 125°C.

Safety Considerations

The LTM4601HV modules do not provide isolation from V_{IN} to V_{OUT} . There is no internal fuse. If required, a slow blow fuse with a rating twice the maximum input current needs to be provided to protect each unit from catastrophic failure.




Figure 7. 1.5V_{OUT} Power Loss




Figure 9. No Heat Sink 5V_{IN}




Figure 8. 3.3V_{OUT} Power Loss




Figure 10. BGA Heat Sink 5V_{IN}

4601hvfb






Figure 11. No Heat Sink 12V_{IN}




Figure 13. $12V_{IN}$, $3.3V_{OUT}$, No Heat Sink




Figure 15. $24V_{IN}$, $1.5V_{OUT}$, No Heat Sink




Figure 12. BGA Heat Sink 12V_{IN}




Figure 14. 12V_{IN}, 3.3V_{OUT}, BGA Heat Sink




Figure 16. 24V_{IN}, 1.5V_{OUT}, BGA Heat Sink



Table 2. Output Voltage Response Versus Component Matrix* (Refer to Figures 19 and 20), OA to 6A Load Step

TYPICAL MEASURED VALUES						
C _{OUT1} VENDORS	PART NUMBER	C _{OUT2} VENDORS	PART NUMBER			
TDK	C4532X5R0J107MZ (100µF, 6.3V)	SANYO POSCAP	6TPE330MIL (330μF, 6.3V)			
TAIYO YUDEN	JMK432BJ107MU-T (100μF, 6.3V)	SANYO POSCAP	2R5TPE470M9 (470μF, 2.5V)			
TAIYO YUDEN	JMK316BJ226ML-T501 (22μF, 6.3V)	SANYO POSCAP	4TPE470MCL (470μF, 4V)			

V _{OUT} (V)	C _{IN} (CERAMIC)	C _{IN} (BULK)	C _{OUT1} (CERAMIC)	C _{OUT2} (BULK)	C _{COMP}	C3	V _{IN} (V)	DROOP (mV)	PEAK TO PEAK (mV)	RECOVERY TIME (μs)	LOAD STEP (A/µs)	R_{SET} ($k\Omega$)
1.2	$2 \times 10 \mu F 35 V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	47pF	5	70	140	30	6	60.4
1.2	$2 \times 10 \mu F 35 V$	150µF 35V	1 × 100µF 6.3V	470µF 2.5V	NONE	100pF	5	35	70	20	6	60.4
1.2	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	22pF	5	70	140	20	6	60.4
1.2	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	5	40	93	30	6	60.4
1.2	2 × 10μF 35V	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	100pF	12	70	140	30	6	60.4
1.2	2 × 10μF 35V	150µF 35V	1 × 100µF 6.3V	470μF 2.5V	NONE	100pF	12	35	70	20	6	60.4
1.2	2 × 10μF 35V	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	22pF	12	70	140	20	6	60.4
1.2	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	12	49	98	20	6	60.4
1.5	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	100pF	5	48	100	35	6	40.2
1.5	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470μF 2.5V	NONE	33pF	5	54	109	30	6	40.2
1.5	2 × 10μF 35V	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	100pF	5	44	84	30	6	40.2
1.5	2 × 10μF 35V	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	5	61	118	30	6	40.2
1.5	2 × 10μF 35V	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	100pF	12	48	100	35	6	40.2
1.5	2 × 10μF 35V	150µF 35V	1 × 100µF 6.3V	470μF 2.5V	NONE	33pF	12	54	109	30	6	40.2
1.5	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	100pF	12	44	89	25	6	40.2
1.5	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	12	54	108	25	6	40.2
1.8	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	47pF	5	48	100	30	6	30.1
1.8	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470μF 2.5V	NONE	100pF	5	44	90	20	6	30.1
1.8	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	100pF	5	68	140	30	6	30.1
1.8	2 × 10μF 35V	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	5	65	130	30	6	30.1
1.8	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	100pF	12	60	120	30	6	30.1
1.8	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470µF 2.5V	NONE	100pF	12	60	120	30	6	30.1
1.8	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	100pF	12	68	140	30	6	30.1
1.8	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	12	65	130	20	6	30.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470μF 4V	NONE	100pF	5	48	103	30	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	220pF	5	56	113	30	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	NONE	5	57	116	30	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	5	60	115	25	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470μF 4V	NONE	100pF	12	48	103	30	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	NONE	12	51	102	30	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	220pF	12	56	113	30	6	19.1
2.5	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	220pF	12	70	140	25	6	19.1
3.3	$2 \times 10 \mu F 35V$	150µF 35V	2 × 100µF 6.3V	330µF 6.3V	NONE	100pF	7	120	240	30	6	13.3
3.3	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470μF 4V	NONE	100pF	7	110	214	30	6	13.3
3.3	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	100pF	7	110	214	30	6	13.3
3.3	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	7	114	230	30	6	13.3
3.3	$2 \times 10 \mu F 35V$	150µF 35V	1 × 100µF 6.3V	470μF 4V	NONE	100pF	12	110	214	30	6	13.3
3.3	$2 \times 10 \mu F 35V$	150µF 35V	3 × 22μF 6.3V	470μF 4V	NONE	150pF	12	110	214	35	6	13.3
3.3	2 × 10μF 35V	150µF 35V	2 × 100μF 6.3V	330µF 6.3V	NONE	100pF	12	110	214	35	6	13.3
3.3	2 × 10μF 35V	150µF 35V	4 × 100μF 6.3V	NONE	NONE	100pF	12	114	230	30	6	13.3
5	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	22pF	15	188	375	25	6	8.25
5 * V7D :-	$2 \times 10 \mu F 35V$	150µF 35V	4 × 100μF 6.3V	NONE	NONE	22pF	20	159	320	25	6	8.25

^{*} X7R is recommended for extended temperature range.

4601hvfb



Table 3. 1.5V Output at 12A

DERATING CURVE	V _{IN} (V)	POWER LOSS CURVE	AIR FLOW (LFM)	HEAT SINK	θ _{JA} (°C/W) LGA	θ _{JA} (°C/W) BGA
Figures 9, 11, 15	5, 12, 24	Figure 7	0	None	15.2	15.7
Figures 9, 11, 15	5, 12, 24	Figure 7	200	None	14	14.5
Figures 9, 11, 15	5, 12, 24	Figure 7	400	None	12	12.5
Figures 10, 12, 16	5, 12, 24	Figure 7	0	BGA Heat Sink	13.9	14.4
Figures 10, 12, 16	5, 12, 24	Figure 7	200	BGA Heat Sink	11.3	11.8
Figures 10, 12, 16	5, 12, 24	Figure 7	400	BGA Heat Sink	10.25	10.75

Table 4. 3.3V Output at 12A

DERATING CURVE	V _{IN} (V)	POWER LOSS CURVE	AIR FLOW (LFM)	HEAT SINK	θ _{JA} (°C/W) LGA	θ _{JA} (°C/W) BGA
Figure 13	12	Figure 8	0	None	15.2	15.7
Figure 13	12	Figure 8	200	None	14.6	15.0
Figure 13	12	Figure 8	400	None	13.4	13.9
Figure 14	12	Figure 8	0	BGA Heat Sink	13.9	14.4
Figure 14	12	Figure 8	200	BGA Heat Sink	11.1	11.6
Figure 14	12	Figure 8	400	BGA Heat Sink	10.5	11.0

Heat Sink Manufacturer

Asvid Thermallov	Part No: 375424B00034G	Phone: 603-224-9988
Aavid Thermalloy	Part No: 3/5424B00034G	Filolie: 003-224-9900

Layout Checklist/Example

The high integration of LTM4601HV makes the PCB board layout very simple and easy. However, to optimize its electrical and thermal performance, some layout considerations are still necessary.

- Use large PCB copper areas for high current path, including V_{IN}, PGND and V_{OUT}. It helps to minimize the PCB conduction loss and thermal stress.
- Place high frequency ceramic input and output capacitors next to the V_{IN}, PGND and V_{OUT} pins to minimize high frequency noise.
- Place a dedicated power ground layer underneath the unit. Refer frequency synchronization source to power ground.
- To minimize the via conduction loss and reduce module thermal stress, use multiple vias for interconnection between top layer and other power layers.
- Do not put vias directly on pads unless they are capped.
- Use a separated SGND copper area for components connected to signal pins. Connect the SGND to PGND underneath the unit.

Figure 17 gives a good example of the recommended layout.

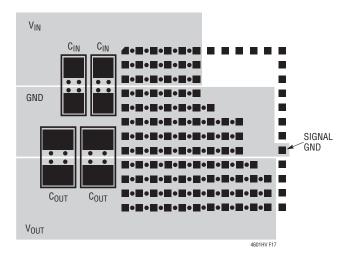


Figure 17. Recommended Layout (LGA and BGA PCB Layouts Are Identical with the Exception of Circle Pads for BGA. See Package Description.)

Frequency Adjustment

The LTM4601HV is designed to typically operate at 850kHz across most input conditions. The f_{SET} pin is normally left open. The switching frequency has been optimized for maintaining constant output ripple noise over most operating ranges. The 850kHz switching frequency and the 400ns minimum off time can limit operation at higher duty cycles like 5V to 3.3V, and produce excessive inductor ripple currents for lower duty cycle applications like 28V to 5V. The $5V_{OUT}$ and $3.3V_{OUT}$ drop out curves are modified by adding an external resistor on the f_{SET} pin to allow for lower input voltage operation, or higher input voltage operation.

Example for 5V Output

LTM4601HV minimum on-time = 100ns $t_{ON} = ((V_{OUT} \bullet 10pF)/I_{fSET})$, for $V_{OUT} > 4.8V$ use 4.8V LTM4601HV minimum off-time = 400ns

 $t_{OFF} = t - t_{ON}$, where t = 1/Frequency

Duty Cycle = t_{ON}/t or V_{OUT}/V_{IN}

Equations for setting frequency:

 $I_{fSET} = (V_{IN}/(3 \cdot R_{fSET}))$, for 28V operation, $I_{fSET} = 238\mu A$, $t_{ON} = ((4.8 \cdot 10pF)/I_{fSET}), t_{ON} = 202ns$, where the internal R_{fSET} is 39.2k. Frequency = $(V_{OUT}/(V_{IN} \cdot t_{ON})) = (5V/(28))$ • 202ns)) ~ 884kHz. The inductor ripple current begins to get high at the higher input voltages due to a larger voltage across the inductor. This is noted in the Typical Inductor Ripple Current vs Duty Cycle graph (Figure 3) where $I_1 \approx$ 10A at 20% duty cycle. The inductor ripple current can be lowered at the higher input voltages by adding an external resistor from f_{SFT} to ground to increase the switching frequency. A 7A ripple current is chosen, and the total peak current is equal to 1/2 of the 7A ripple current plus the output current. The 5V output current is limited to 8A, so the total peak current is less than 11.5A. This is below the 14A peak specified value. A 100k resistor is placed from f_{SET} to ground, and the parallel combination of 100k and 39.2k equates to 28k. The I_{fSFT} calculation with 28k and 28V input voltage equals 333µA. This equates to a ton of 144ns. This will increase the switching frequency from ~884kHz to ~1.24MHz for the 28V to 5V conversion.

4601hvfb



The minimum on-time is above 100ns at 28V input. Since the switching frequency is approximately constant over input and output conditions, then the lower input voltage range is limited to 10V for the 1.24MHz operation due to the 400ns minimum off-time. Equation: $t_{ON} = (V_{OUT}/V_{IN})$ • (1/Frequency) equates to a 400ns on-time, and a 400ns off-time. The " V_{IN} to V_{OUT} Step-Down Ratio Curve" reflects an operating range of 10V to 28V for 1.24MHz operation with a 100k resistor to ground as shown in Figure 18, and an 8V to 16V operation for f_{SET} floating. These modifications are made to provide wider input voltage ranges for the 5V output designs while limiting the inductor ripple current, and maintaining the 400ns minimum off-time.

Example for 3.3V Output

LTM4601HV minimum on-time = 100ns $t_{ON} = ((V_{OUT} \cdot 10pF)/I_{fSET})$

LTM4601HV minimum off-time = 400ns $t_{OFF} = t - t_{ON}$, where t = 1/Frequency

Duty Cycle (DC) = t_{ON}/t or V_{OUT}/V_{IN}

Equations for setting frequency:

 $I_{fSET} = (V_{IN}/(3 \bullet R_{fSET}))$, for 28V operation, $I_{fSET} = 238\mu A$, $t_{ON} = ((3.3 \bullet 10pF)/I_{fSET})$, $t_{ON} = 138.7$ ns, where the internal R_{fSET} is 39.2k. Frequency = $(V_{OUT}/(V_{IN} \bullet t_{ON})) = (3.3V/(28 \bullet 138.7$ ns)) ~ 850kHz. The minimum on-time and minimum

off-time are within specification at 139ns and 1037ns. The 4.5V minimum input for converting 3.3V output will not meet the minimum off-time specification of 400ns. t_{ON} = 868ns, Frequency = 850kHz, t_{OFF} = 315ns.

Solution

Lower the switching frequency at lower input voltages to allow for higher duty cycles, and meet the 400ns minimum off-time at 4.5V input voltage. The off-time should be about 500ns, which includes a 100ns guard band. The duty cycle for (3.3V/4.5V) = ~73%. Frequency = $(1 - DC)/t_{OFF}$ or (1 - 0.73)/500ns = 540kHz. The switching frequency needs to be lowered to 540kHz at 4.5V input. $t_{ON} = DC/$ frequency, or 1.35µs. The f_{SET} pin voltage compliance is 1/3 of V_{IN}, and the I_{fSFT} current equates to 38µA with the internal 39.2k. The I_{fSET} current needs to be 24 μ A for 540kHz operation. As shown in Figure 19, a resistor can be placed from V_{OUT} to f_{SFT} to lower the effective I_{fSFT} current out of the f_{SET} pin to 24µA. The f_{SET} pin is 4.5V/3 =1.5V and V_{OLIT} = 3.3V, therefore 130k will source 14 μ A into the f_{SFT} node and lower the I_{fSFT} current to 24µA. This enables the 540kHz operation and the 4.5V to 28V input operation for down converting to 3.3V output. The frequency will scale from 540kHz to 1.1 MHz over this input range. This provides for an effective output current of 8A over the input range.

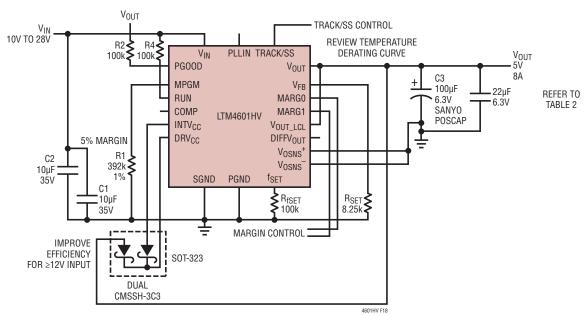


Figure 18. 5V at 8A Design Without Differential Amplifier

4601hvfb

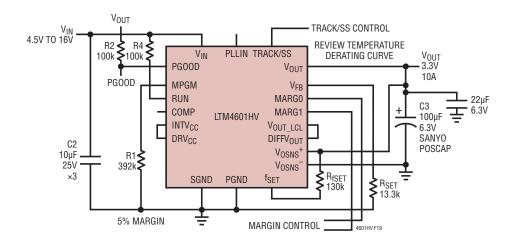


Figure 19. 3.3V at 10A Design


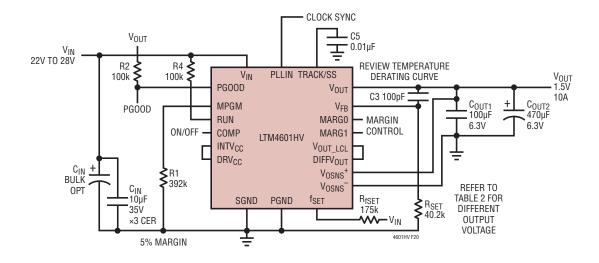


Figure 20. Typical 22V to 28V, 1.5V at 10A Design, 500kHz

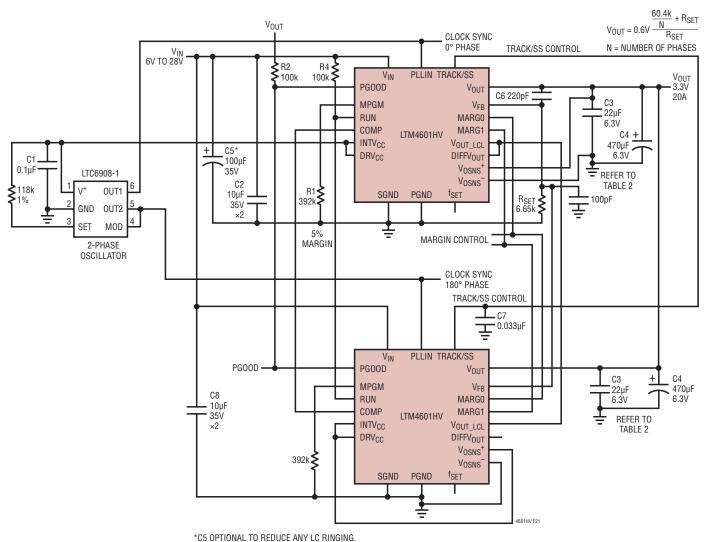

NOT NEEDED FOR LOW INDUCTANCE PLANE CONNECTION

Figure 21. 2-Phase Parallel, 3.3V at 20A Design

TYPICAL APPLICATIONS

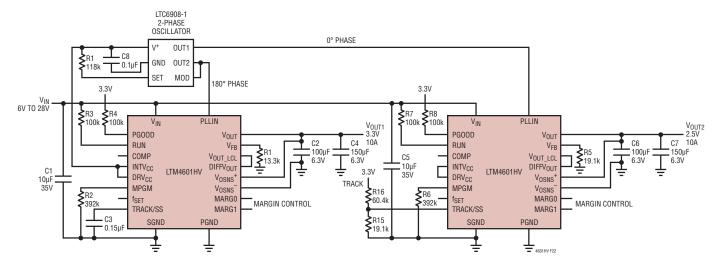


Figure 22. Dual Outputs (3.3V and 2.5V) with Coincident Tracking


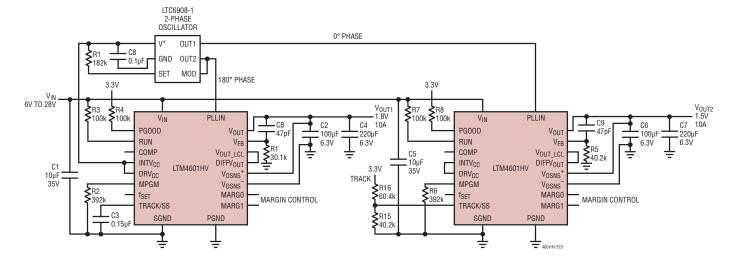


Figure 23. Dual Outputs (1.8V and 1.5V) with Coincident Tracking

LINEAR

Please refer to http://www.linear.com/designtools/packaging/ for the most recent package drawings.

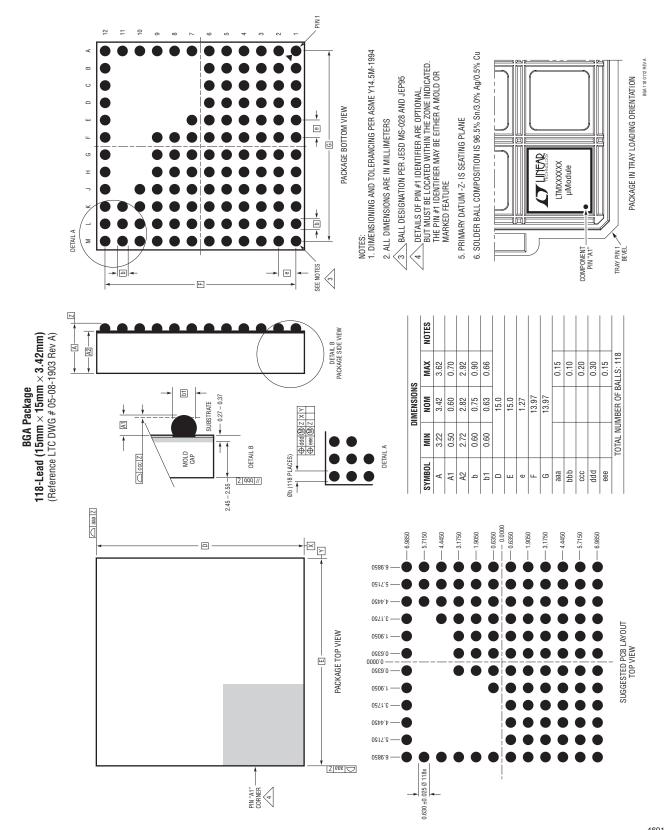

Please refer to http://www.linear.com/designtools/packaging/ for the most recent package drawings.

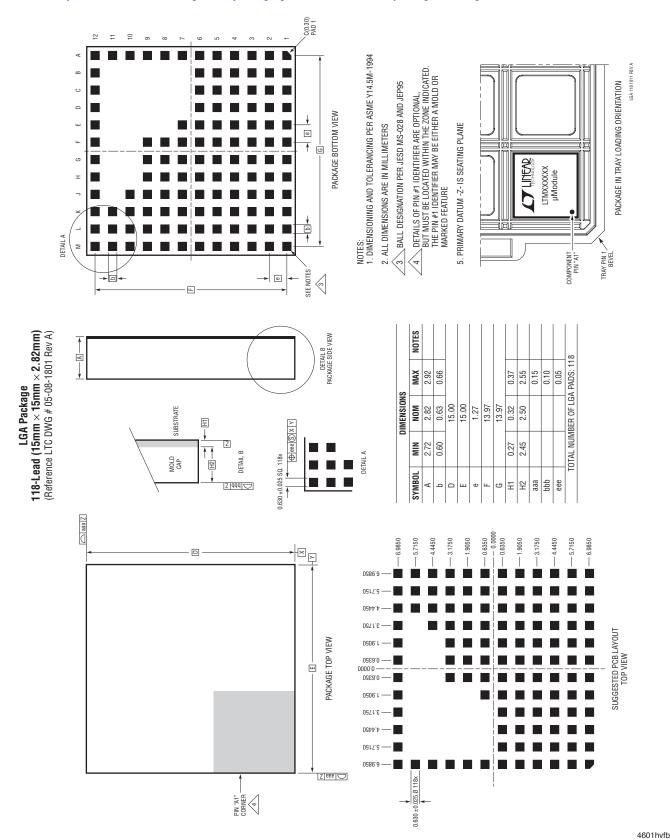


Table 5. Pin Assignment (Arranged by Pin Number)

PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION
A1	V _{IN}	B1	V _{IN}	C1	V _{IN}	D1	PGND	E1	PGND	F1	PGND
A2	V _{IN}	B2	V _{IN}	C2	V _{IN}	D2	PGND	E2	PGND	F2	PGND
А3	V _{IN}	В3	V _{IN}	C3	V _{IN}	D3	PGND	E3	PGND	F3	PGND
A4	V _{IN}	B4	V _{IN}	C4	V _{IN}	D4	PGND	E4	PGND	F4	PGND
A5	V _{IN}	B5	V _{IN}	C5	V _{IN}	D5	PGND	E5	PGND	F5	PGND
A6	V _{IN}	В6	V _{IN}	C6	V _{IN}	D6	PGND	E6	PGND	F6	PGND
A7	INTV _{CC}	B7	-	C7	_	D7	_	E7	PGND	F7	PGND
A8	PLLIN	B8	_	C8	_	D8	_	E8	_	F8	PGND
A9	TRACK/SS	В9	-	C9	-	D9	_	E9	_	F9	PGND
A10	RUN	B10	_	C10	_	D10	_	E10	_	F10	_
A11	COMP	B11	_	C11	-	D11	-	E11	_	F11	_
A12	MPGM	B12	f _{SET}	C12	MARG0	D12	MARG1	E12	DRV _{CC}	F12	V _{FB}

PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION	PIN ID	FUNCTION
G1	PGND	H1	PGND	J1	V _{OUT}	K1	V _{OUT}	L1	V _{OUT}	M1	V _{OUT}
G2	PGND	H2	PGND	J2	V _{OUT}	K2	V _{OUT}	L2	V _{OUT}	M2	V _{OUT}
G3	PGND	Н3	PGND	J3	V _{OUT}	К3	V _{OUT}	L3	V _{OUT}	M3	V _{OUT}
G4	PGND	H4	PGND	J4	V _{OUT}	K4	V _{OUT}	L4	V _{OUT}	M4	V _{OUT}
G5	PGND	H5	PGND	J5	V _{OUT}	K5	V _{OUT}	L5	V _{OUT}	M5	V _{OUT}
G6	PGND	H6	PGND	J6	V _{OUT}	K6	V _{OUT}	L6	V _{OUT}	M6	V _{OUT}
G7	PGND	H7	PGND	J7	V _{OUT}	K7	V _{OUT}	L7	V _{OUT}	M7	V _{OUT}
G8	PGND	Н8	PGND	J8	V _{OUT}	K8	V _{OUT}	L8	V _{OUT}	M8	V _{OUT}
G9	PGND	Н9	PGND	J9	V _{OUT}	К9	V _{OUT}	L9	V _{OUT}	M9	V _{OUT}
G10	_	H10	_	J10	V _{OUT}	K10	V _{OUT}	L10	V _{OUT}	M10	V _{OUT}
G11	_	H11	_	J11	_	K11	V _{OUT}	L11	V _{OUT}	M11	V _{OUT}
G12	PG00D	H12	SGND	J12	V _{OSNS} +	K12	DIFFV _{OUT}	L12	V _{OUT_LCL}	M12	V _{OSNS} -

Table 6. Pin Assignment (Arranged by Pin Function)

PIN N	NAME
A1	V _{IN}
A2	V _{IN}
A3	V _{IN}
A4	V _{IN}
A5	V _{IN}
A6	V _{IN}
B1	V _{IN}
B2	V_{IN}
B3	V _{IN}
B4	V _{IN}
B5	l V _{IN}
B6	V _{IN}
C1	V _{IN}
C2	V _{IN}
C3	V _{IN}
C4	V _{IN}
C5	V _{IN}
C6	V _{IN}

	lable 6. Pi
PIN N	IAME
D1	PGND
D2	PGND
D3	PGND
D4	PGND
D5	PGND
D6	PGND
E1	PGND
E2	PGND
E3	PGND
E4	PGND
E5	PGND
E6	PGND
E7	PGND
F1	PGND
F2	PGND
F3	PGND
F4	PGND
F5	PGND
F6	PGND
F7	PGND
F8	PGND
F9	
G1	PGND
G2	PGND
G3	PGND
G4	PGND
G5	PGND
G6	PGND
G7	PGND
G8	PGND
G9	
H1 H2 H3 H4 H5 H6 H7 H8	PGND PGND PGND PGND PGND PGND PGND PGND

Signinent	(Allaliyeu				
PIN	PIN NAME				
J1 J2 J3 J4 J5	V _{OUT} V _{OUT} V _{OUT} V _{OUT}				
J6 J7 J8 J9 J10	VOUT VOUT VOUT VOUT VOUT				
K1 K2 K3 K4 K5 K6 K7 K8 K9 K10	Vout Vout Vout Vout Vout Vout Vout Vout				
L1 L2 L3 L4 L5 L6 L7 L8 L9 L10 L11	Vout Vout Vout Vout Vout Vout Vout Vout				
M1 M2 M3 M4 M5 M6 M7 M8 M9 M10	Vout Vout Vout Vout Vout Vout Vout Vout				


PIN	NAME
A7 A8 A9 A10 A11 A12	INTV _{CC} PLLIN TRACK/SS RUN COMP MPGM
B12	f _{SET}
C12	MARG0
D12	MARG1
E12	DRV _{CC}
F12	V_{FB}
G12	PG00D
H12	SGND
J12	V _{OSNS} ⁺
K12	DIFFV _{OUT}
L12	V _{OUT_LCL}
M12	V _{OSNS} -


PIN N	IAME
B7	-
B8	-
B9	-
B10	-
B11	- - - - - - - - - - - - - - - - - - -
C7	-
C8	-
C9	-
C10	-
C11	-
D7	-
D8	-
D9	-
D10	-
D11	-
E8	-
E9	-
E10	-
E11	-
F10	-
F11	-
G10	-
G11	-
H10	-
H11	-
J11	_

REVISION HISTORY (Revision history begins at Rev B)

REV	DATE	DESCRIPTION	PAGE NUMBER
В	03/12	Revised entire data sheet to include the BGA package.	1–30

PACKAGE PHOTOS

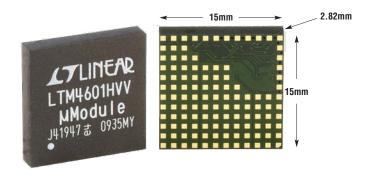



RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS				
LTM4628	26V, Dual 8A, DC/DC Step-Down µModule Regulator	$4.5V \le V_{IN} \le 26.5V$, $0.6V \le V_{OUT} \le 5V$, Remote Sense Amplifier, Internal Temperature Sensing Output, 15mm \times 15mm \times 4.32mm LGA				
LTM4627	20V, 15A DC/DC Step-Down µModule Regulator	$4.5V \le V_{IN} \le 20V$, $0.6V \le V_{OUT} \le 5V$, PLL Input, V_{OUT} Tracking, Remote Sense Amplifier, $15mm \times 15mm \times 4.32mm$ LGA				
LTM4611	1.5V _{IN(MIN)} , 15A DC/DC Step-Down µModule Regulator	$1.5V \le V_{IN} \le 5.5V, 0.8V \le V_{OUT} \le 5V, PLL$ Input, Remote Sense Amplifier, V_{OUT} Tracking, $15mm \times 15mm \times 4.32mm$ LGA				
LTM4613	8A EN55022 Class B DC/DC Step-Down µModule Regulator	$5V \le V_{IN} \le 36V, 3.3V \le V_{OUT} \le 15V, PLL Input, V_{OUT} Tracking and Margining, 15mm \times 15mm \times 4.32mm LGA$				
LTM4601AHV	28V, 12A DC/DC Step-Down µModule Regulator	$4.5V \le V_{IN} \le 28V$, $0.6V \le V_{OUT} \le 5V$, PLL Input, Remote Sense Amplifier, V_{OUT} Tracking and Margining, $15mm \times 15mm \times 2.82mm$ LGA or $15mm \times 15mm \times 3.42mm$ BGA				
LTM4601A	20V, 12A DC/DC Step-Down µModule Regulator	$4.5V \le V_{IN} \le 20V$, $0.6V \le V_{OUT} \le 5V$, PLL Input, Remote Sense Amplifier, V_{OUT} Tracking and Margining, $15mm \times 15mm \times 2.82mm$ LGA or $15mm \times 15mm \times 3.42mm$ BGA				
LTM8027	60V, 4A DC/DC Step-Down µModule Regulator	$4.5V \le V_{IN} \le 60V$, $2.5V \le V_{OUT} \le 24V$, CLK Input, $15mm \times 15mm \times 4.32mm$ LGA				
LTM8032	36V, 2A EN55022 Class B DC/DC Step-Down µModule Regulator	$3.6V \le V_{IN} \le 36V,~0.8V \le V_{OUT} \le 10V,~Synchronizable,~9mm \times 15mm \times 2.82mm~LGA$ or $9mm \times 15mm \times 3.42mm~BGA$				
LTM8061	32V, 2A Step-Down µModule Battery Charger with Programmable Input Current Limit	Compatible with Single Cell or Dual Cell Li-Ion or Li-Poly Battery Stacks (4.1V, 4.2V, 8.2V, or 8.4V), 4.95V \leq V $_{\rm IN}$ \leq 32V, C/10 or Adjustable Timer Charge Termination, NTC Resistor Monitor Input, 9mm \times 15mm \times 4.32mm LGA				

© LINEAR TECHNOLOGY CORPORATION 2007