
1-Cover SUPERSEAL 1.0.qxd 09.06.2008 16:10 Uhr Seite 2

TYCO ELECTRONICS GLOBAL AUTOMOTIVE DIVISION



THE 5 APPLICATION AREAS



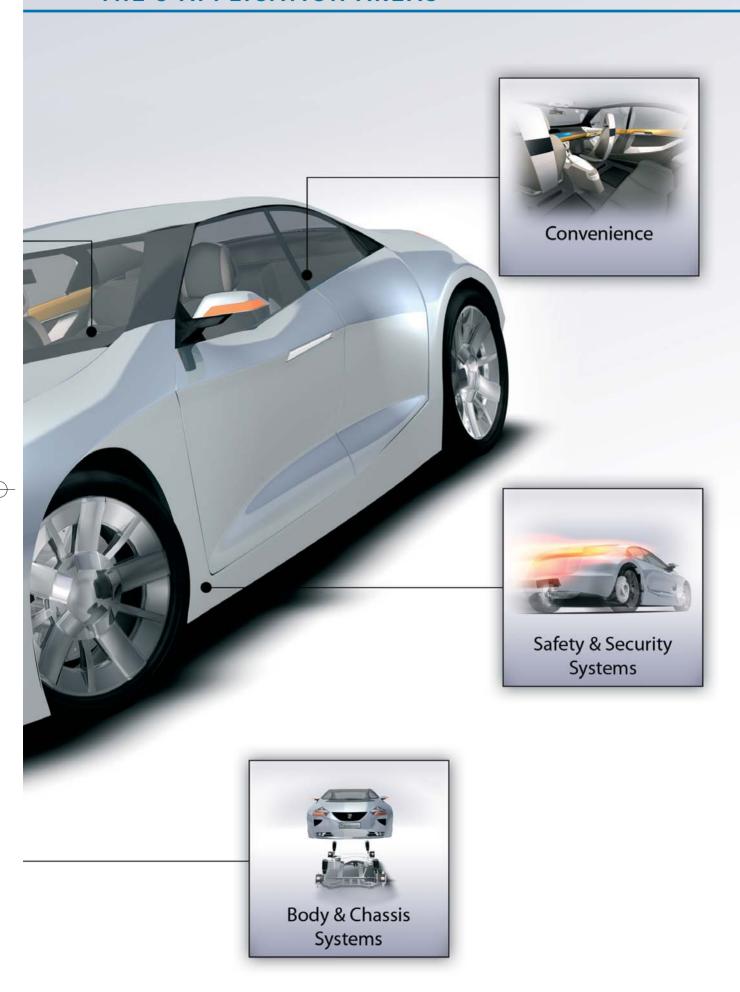

INNOVATIVE TECHNOLOGIES

Tyco Electronics is the world's largest passive electronic components manufacturer and a world leader in cutting-edge wireless technologies. Tyco Electronics has facilities located in over 50 countries, serving customers in the aerospace, automotive, computer, communications, consumer electronics, industrial and power industries. The global automotive division follows the globalization goals of our customers, speeds up the integration of new technologies and enables our customers access to our vast product portfolio and services.

TERMINALS & CONNECTORS



Tyco Electronics offers a broad range of high quality terminals and connectors. Our electrical/electronic interconnection products and solutions are used to electrically and mechanically join wires and cables, printed circuit boards, integrated circuit packages and batteries. Tyco Electronics expanding capabilities include new copper and fiber-optic connectors, wires, cables/cable management systems that are designed to meet automotive industry demands. The AMP brand encompasses the broadest range of connectors in the world,

including high-density, high-speed designs for leading-edge communications equipment.

LITERATURE NO. 1308092-2

CABLE ASSEMBLY SYSTEMS



Tyco Electronics is your partner for special cable assemblies.

Tyco Electronics offers research and development capabilities, prototyping, samples as well as manufacturing facilities for special cable assemblies. This includes overmold technology, semi/fully automatic manufacturing, testing equipment and appliances for handling of high volume production.

LITERATURE NO. 1654288-2

MECHATRONICS



A variety of technical products are designed today by integrating mechanical components and electronic hardware into one packaging unit thus creating true mechatronic solutions. Mechatronic applications offer amazing and versatile potentials related to functionality, cost, space requirements and quality. Tyco Electronics contributes to those applications with its wide range of innovative and cost-effective product and process technologies.

Advanced stamping, injection molding and assembly techniques are

applied along with highly selective surface plating methods.

LITERATURE NO. 1308091-2

SENSOR TECHNOLOGY



Contact-less measuring eliminates interference effects, wear and tear, and provides increased reliability. Tyco Electronics, one of the largest technology providers for the automobile industry, offers contact-less sensors for a variety of applications. As sensor manufacturer and processing partner, Tyco Electronics also provides project planning support for new sensor applications, assistance in the selection of the appropriate sensor technology for the respective application, and assistance with defining the corresponding mechanical, electrical

and magnetic interface. Tyco Electronics has a broad electromechanical portfolio that includes robust housing technologies, connector systems, and temperature stable designs based on foil and cable networks. This combination of technologies and experience ensures that reliable and cost effective sensor solutions are available for all application types.

LITERATURE NO. 1308086-2

RELAYS AND SWITCHING MODULES



Automotive technology and integrated systems continue to develop rapidly with electric and electronic systems in today's vehicles playing an increasingly important role for traffic safety and travelling comfort. Automotive Relays and Switching Modules (AR & SM) of Tyco Electronics' Global Automotive Division offer a wide range of the most important components for such systems and is the world's number one participant in this industry sector. Tyco Electronics has competencies in development, production and related technologies

as well as application support, which ensures a competitive edge and mutual business growth on a worldwide scale.

LITERATURE NO. 1308085-2



POWER DISTRIBUTION SYSTEMS



In automotive environments, the extensive net of electrical/electronic loads requires complex powernet structures. The next evolution of these structures include intelligent control and distribution systems.

Tyco Electronics is working on modules with intelligent technology combinations. Our capabilities include, power distribution units that incorporate integrated switching and protection functions along with flexibility and maximizing modularity to best suit our customer needs.

LITERATURE NO. 1308087-2

INDUCTIVE SYSTEMS



The Global Automotive Division is your source for interconnection and wireless technologies for automotive, truck and off-highway OEMs and Tier 1 suppliers. With the design competency center in Oostkamp (Belgium), and strategic production centers in Evora (Portugal), Bangalore (India), Shenzhen (China), and Oostkamp (Belgium), Tyco Electronics Inductive Systems is ready to offer you any LF-application component required in the automotive industry.

The Inductive System group focuses on the customer requirement in order to design to the exact demand. This is achieved by highly- technical, intelligent and cost-efficient engineering. In order to be a leader in design, Tyco Electronics Inductive Systems has a vast product portfolio, which consists out of antennas, actuators and integrated modules. Next to that, several specific applications are designed.

LITERATURE NO. 1308089-2

ALTERNATIVE POWER SYSTEMS COMPONENTS FOR HYBRID AND FUELCELL TECHNOLOGY



Tyco Electronics is a leader in next-generation transportation technologies and products for hybrid and electric vehicles. The Global Automotive Division is your source for high voltage power distribution, high current contacts, high voltage connectors and cables, high voltage relays, sensors and temperature protection devices for hybrid and other alternative powered vehicles.

LITERATURE NO. 1308093-2

HIGH SPEED DATA NETWORKING




High speed data networking within the automobile is becoming more predominant. What was till now restricted to the high end of the market utilizing system such as the MOST® network, high speed data transmission based on optical fibers, now with the introduction of iPOD's, display screens and cameras results in the need for high speed networking throughout all platforms.

MOST® IS A TRADEMARK

LITERATURE NO. 1308084-2

WIRELESS TECHNOLOGIES RADAR SENSORS & ANTENNAS FOR TELEMATICS



Tyco Electronics is a world leading supplier of radar technology for the automotive industries. In cooperation with system integrators and OEMs, Tyco Electronics developed 24 GHz high resolution short range radar sensors in Ultra Wide Band technology and 77 GHz Adaptive Cruise Control radar front ends suitable for driver assistance applications, which enable advanced active and passive safety systems.

Tyco Electronics develops, produces and supplies antennas for the automotive industries. Single to Quad band antennas are available in state of the art planar and dipole technologies. All telematic frequency bands for satellite radio, navigation, emergency positioning and cellular mobile communications are covered.


LITERATURE NO. 1308090-2

TYCO ELECTRONICS. OUR COMMITMENT. YOUR ADVANTAGE.

Tyco Electronics' businesses operate in thousands of different areas of industry. The products and services we deliver all have one thing in common: They are vital to everyday living. Individuals and companies worldwide have critical needs. And every minute of every day, we satisfy them.



TYCO ELECTRONICS "TECHNOLOGY PORTFOLIO"

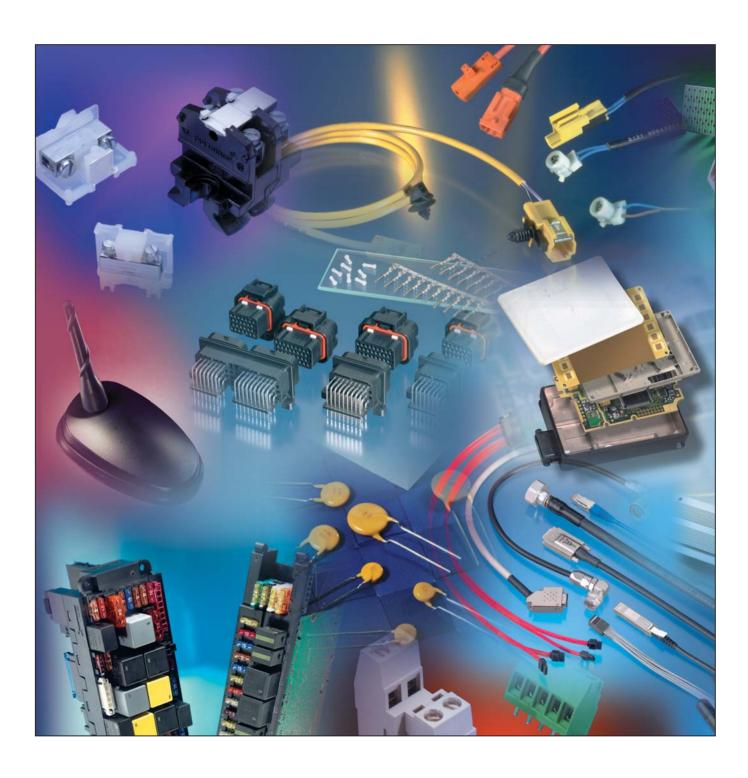

- Connector Systems / Electromechanical Components
- Relays
- Wireless Products
- Sensors
- Fiber Optic Products
- Wire & Cable
- Application Tooling

- Antennas, GPS Antennas, Integrated Antenna Systems
- Circuit Protection Devices
- Tubing & Harnessing Products
- Touch Screen Displays
- Resistors & Inductors
- Heat Sinks & Thermal Solutions
- Switches and Knobs

- Battery Connectors & Assemblies
- Identification Labeling Products
- Racks & Panels
- Smart Cards / Leadframes

6

TYCO ELECTRONICS "AT YOUR SERVICE"



Tyco Electronics Online

The Tyco Electronics website is an innovative and interactive source for application information, product updates and technical solutions.

Our step-by-step software makes our website intuitive and user-friendly to better serve you!

Please contact us at:

www.tycoelectronics.com/automotive

Internet Homepage

www.tycoelectronics.com/automotive

Electronic Internet Catalog

www.catalog.tycoelectronics.com

Product Information Center (PIC)

You can rely on Tyco Electronics PIC Team to provide you support for answers to your general information or technical questions in an efficient and effective manner.

To reach our PIC staff, please contact your local Tyco Electronics organization.




Product and Machine Literature

Tyco Electronics offers a variety of product specific catalogs, brochures and high impact flyers to help better serve you!

For more information on literature for Tyco Electronics'

Global Automotive Division, please contact your local Tyco Electronics

Organization or go to www.tycoelectronics.com/automotive








for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Quality Guidelines

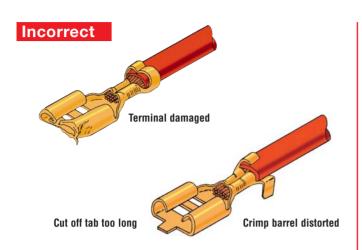





Insulation inside the wire crimp

Conductor Brush protruding into terminal body





INSULATION CRIMP











Insulation is not

securely held



Insulation is pierced and could damage conductor





Insulation material is pierced



Insulation is not securely held Legs do not overlap

Insulation is over crimped

WIRE CRIMP

Incorrect applicator adjustment

Asymmetric crimp

Unacceptable formation excessive flash and/or cracks



Terminal feed incorrectly adjusted

Anvil and crimper not aligned or worn

Incorrect terminal/wire selection

Wire size too large



Crimp barrel does not close

Wire size too small



Legs too close to bottom of crimp. Insufficient deformation of strands, showing voids

Incorrect crimp height adjustment

Crimp height too loose



Insufficient deformation, showing voids

Crimp height too tight



Flash at under side of crimp, due to over crimping



for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Quality Guidelines (continued)

WIRE CRIMP Correct Bellmouth must always be present **Insulation Present Conductor Present Bellmouth Permissible** Locking lances and terminal Cut off tabs present 🖊 body not deformed

Correct selection of wire, terminal and applicator






Crimp barrel is closed, legs support each other

Sufficient gap between legs and bottom of crimp

All strands are equally distributed and deformed

INSULATION CRIMP

Correct Insulation Diameter, Applicator and Terminal








Insulation is securely held Crimp barrel closed

For double wire applications with different size wires always place wire with smallest outer diameter in the bottom







Insulation is securely held Legs overlap








Insulation securely held Legs must pass each other

Test

WIRE CRIMP



Crimp heights and tolerances

For crimp height tolerances for any given contact, please refer to the relevant application specification.


Examples:

Con- tact	Part No.	Wire Range (mm²)	Toler- ance (mm)	Appli- cation Spec.
MQS	962885 962886	0.2-0.5	±0.03	114-18025
JPT	927775	0.5-1.0	±0.05	114-18050
JPT	927773	1.5-2.5	±0.05	114-18050

Digital Crimp Height Micrometer (0.001 mm increments) acc. to DIN ISO 9001 Part No. 547203-1



INSULATION CRIMP







for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Restriction on the Use of Hazardous Substances (RoHS)

Restriction on the Use of Hazardous Substances (RoHS)

At Tyco Electronics, we're ready to support your RoHS requirements. We've assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. Part numbers in this catalog are identified as:

RoHS Compliant

Part numbers in this catalog are RoHS Compliant, unless marked otherwise.

These products comply with European Union Directive 2002/95/EC as amended 1 January 2006 that restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

Note: For purposes of this Catalog, included within the definition of RoHS Compliant are products that are clearly "Out of Scope" of the RoHS Directive such as hand tools and other non-electrical accessories.

Non-RoHS Compliant

These part numbers are identified with a "♠" symbol. These products do not comply with the material restrictions of the European Union Directive 2002/95/EC.

5 of 6 Compliant

A "•" symbol identifies these part numbers. These products do not fully comply with the European Union Directive 2002/95/EC because they contain lead in solderable interfaces (they do not contain any of the other five restricted substances above allowable limits). However, these products may be suitable for use in RoHS applications where there is an application-based exception for lead in solders, such as the server, storage, or networking infrastructure exemption.

Note: Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced below.

Getting the Information You Need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

- Cross-Reference from Non-compliant to Compliant Products
- Ability to browse RoHS Compliant Products in our on-line catalog: http://ecommas.tycoelectronics.com/commerce/alt/RohsAltHome.do
- Downloadable Technical Data Customer Information Presentation
- More detailed information regarding the definitions used above

RoHS Customer Support

So whatever your questions when it comes to RoHS, we've got the answers at www.tycoelectronics.com/leadfree





for the Automotive Market

Catalog 1308072-2 Revised 6-2008

AWG Conversion Table (Average Value)

Conversion Tables

Most of the wire size ranges are mentioned in mm², as well as the insulation diameters which are in many cases only in mm's.

We therefore included the conversion tables on pages 12 and 13

Please note that wire and insulation sizes are for guidance only.

Consult the customer drawing for precise detail.

AWG Code	Diameter (Inch)	Diameter (mm)	F (mm²)
000000	0.5800	14.733	170.0
00000	0.5165	13.13	135.0
0000	0.4600	11.684	103.8
000	0.4096	10.40	79.0
00	0.3648	9.27	67.5
0	0.3249	8.25	53.4
1	0.2893	7.34	42.2
2	0.2576	6.55	33.7
3	0.2294	5.82	26.6
4	0.2043	5.18	21.0
5	0.1819	4.62	16.9
6	0.1620	4.115	13.25
7	0.1443	3.66	10.25
8	0.1285	3.26	8.34
9	0.1144	2.90	6.6
10	0.1019	2.59	5.27
11	0.0907	2.30	4.15
12	0.0808	2.05	3.3
13	0.0720	1.83	2.63
14	0.0641	1.63	2.08
15	0.0571	1.45	1.65
16	0.0508	1.29	1.305
17	0.0453	1.14	1.01
18	0.0403	1.02	0.79
19	0.0359	0.91	0.65
20	0.0320	0.81	0.51
21	0.0285	0.72	0.407
22	0.0253	0.64	0.32
23 24	0.0226	0.57 0.51	0.255
25	0.0201	0.51	0.205 0.162
26	0.0179 0.0159	0.455	0.102
27	0.0139	0.40	0.123
28	0.0142	0.320	0.102
29	0.0120	0.320	0.0646
30	0.0100	0.254	0.0516
31	0.0089	0.226	0.04
32	0.0080	0.203	0.0324
33	0.0071	0.180	0.0255
34	0.0063	0.160	0.02
35	0.0056	0.142	0.0158
36	0.0050	0.127	0.0127
37	0.0045	0.114	0.01
38	0.0040	0.101	0.008
39	0.0035	0.089	0.0062
40	0.0031	0.079	0.0049
41	0.0028	0.071	0.00395
42	0.0025	0.064	0.00321
43	0.0022	0.056	0.00246
44	0.00198	0.050	0.00196
45	0.00176	0.045	
46	0.00157	0.040	
47	0.00140	0.036	
48	0.00124	0.031	
49	0.00110	0.028	

FLK/FLR Cable

FLK and FLR stand for German DIN (72551) abbreviations.

FLK means:

In German:

- Fahrzeug Leitung Kunststoff
 In English:
- Vehicle Cable Plastic

FLR means:

In German:

Fahrzeug Leitung Reduziert

In English:

 Thin Walled Cable (reduced insulation thickness)

Remark: Starting from 0.03 mm² (AWG 32) a wire can be crimped.

0.00099

0.025

50

All specifications subject to change. Consult Tyco Electronics for latest specifications.





AMP SUPERSEAL Connectors 1.0 mm System for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Conversion Table - Inch/mm

Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009
0	0	0.0254	0.0508	0.0762	0.1016	0.1270	0.1524	0.1778	0.2032	0.2286
0.010	0.2540	0.2794	0.3048	0.3302	0.3556	0.3810	0.4064	0.4318	0.4572	0.4826
0.020	0.5080	0.5334	0.5588	0.5842	0.6096	0.6350	0.6604	0.6858	0.7112	0.7366
0.030	0.7620	0.7874	0.8128	0.8382	0.8636	0.8890	0.9144	0.9398	0.9652	0.9906
0.040	1.0160	1.0414	1.0668	1.0922	1.1176	1.1430	1.1684	1.1938	1.2192	1.2446
0.050	1.2700	1.2954	1.3208	1.3462	1.3716	1.3970	1.4224	1.4478	1.4732	1.4986
0.060	1.5240	1.5494	1.5748	1.6002	1.6256	1.6510	1.6764	1.7018	1.7272	1.7526
0.070	1.7780	1.8034	1.8288	1.8542	1.8796	1.9050	1.9304	1.9558	1.9812	2.0066
0.080	2.0320	2.0574	2.0828	2.1062	2.1336	2.1590	2.1844	2.2098	2.2352	2.2606
0.090	2.2860	2.3114	2.3368	2.3622	2.3876	2.4130	2.4384	2.4638	2.4892	2.5146
0.100	2.5400	2.5654	2.5908	2.6162	2.6416	2.6670	2.6924	2.7178	2.7432	2.7686
0.110	2.7940	2.8194	2.8448	2.8702	2.8956	2.9210	2.9464	2.9718	2.9972	3.0226
0.120	3.0480	3.0734	3.0988	3.1242	3.1496	3.1750	3.2004	3.2258	3.2512	3.2766
0.130	3.3020	3.3274	3.3528	3.3782	3.4036	3.4290	3.4544	3.4798	3.5052	3.5306
0.140	3.5560	3.5814	3.6068	3.6322	3.6576	3.6830	3.7084	3.7338	3.7592	3.7846
0.150	3.8100	3.8354	3.8608	3.8862	3.9116	3.9370	3.9624	3.9878	4.0132	4.0386
0.160	4.0640	4.0894	4.1148	4.1402	4.1656	4.1910	4.2164	4.2418	4.2672	4.2926
0.170	4.3180	4.3434	4.3688	4.3942	4.4196	4.4450	4.4704	4.4958	4.5212	4.5466
0.180	4.5720	4.5974	4.6228	4.6482	4.6736	4.6990	4.7244	4.7498	4.7752	4.8006
0.190	4.8260	4.8514	4.8768	4.9022	4.9276	4.9530	4.9784	5.0038	5.0292	5.0546
0.200	5.0800	5.1054	5.1308	5.1562	5.1816	5.2070	5.2324	5.2578	5.2832	5.3086
0.210	5.3340	5.3594	5.3848	5.4102	5.4356	5.4610	5.4864	5.5118	5.5372	5.5626
0.220	5.5880	5.6134	5.6388	5.6642	5.6896	5.7150	5.7404	5.7658	5.7912	5.8166
0.230	5.8420	5.8674	5.8928	5.9182	5.9436	5.9690	5.9944	6.0198	6.0452	6.0706
0.240	6.0960	6.1214	6.1468	6.1722	6.1976	6.2230	6.2484	6.2738	6.2992	6.3246
0.250	6.3500	6.3754	6.4008	6.4262	6.4516	6.4770	6.5024	6.5278	6.5532	6.5786
0.260	6.6040	6.6294	6.6548	6.6802	6.7056	6.7310	6.7564	6.7818	6.8072	6.8326
0.270	6.8580	6.8834	6.9088	6.9342	6.9596	6.9850	7.0104	7.0358	7.0612	7.0866
0.280 0.290	7.1120 7.3660	7.1374 7.3914	7.1628 7.4168	7.1882 7.4422	7.2136 7.4676	7.2390 7.4930	7.2644 7.5184	7.2898 7.5438	7.3152 7.5692	7.3406 7.5946
0.290	7.6200	7.6454	7.4108	7.4422	7.7216	7.4930	7.5164	7.7978	7.8232	7.8486
0.310	7.8740	7.8994	7.9248	7.9502	7.9756	8.0010	8.0264	8.0518	8.0772	8.1026
0.320	8.1280	8.1534	8.1788	8.2042	8.2296	8.2550	8.2804	8.3058	8.3312	8.3566
0.330	8.3820	8.4074	8.4328	8.4582	8.4836	8.5090	8.5344	8.5598	8.5852	8.6106
0.340	8.6360	8.6614	8.6868	8.7122	8.7376	8.7630	8.7884	8.8138	8.8392	8.8646
0.350	8.8900	8.9154	8.9408	8.9662	8.9916	9.0170	9.0424	9.0678	9.0932	9.1186
0.360	9.1440	9.1694	9.1948	9.2202	9.2456	9.2710	9.2964	9.3218	9.3472	9.3726
0.370	9.3980	9.4234	9.4488	9.4742	9.4996	9.5250	9.5504	9.5758	9.6012	9.6266
0.380	9.6520	9.6774	9.7028	9.7282	9.7536	9.7790	9.8044	9.8298	9.8552	9.8806
0.390	9.9060	9.9314	9.9568	9.9822	10.0076	10.0330	10.0584	10.0838	10.1092	10.1346
0.400	10.1600	10.1854	10.2108	10.2362	10.2616	10.2870	10.3124	10.3378	10.3632	10.3886
0.410	10.4140	10.4394	10.4648	10.4902	10.5156	10.5410	10.5664	10.5918	10.6172	10.6426
0.420	10.6680	10.6934	10.7188	10.7442	10.7696	10.7950	10.8204	10.8458	10.8712	10.8966
0.430	10.9220	10.9474	10.9728	10.9982	11.0236	11.0490	11.0744	11.0998	11.1252	11.1506
0.440	11.1760	11.2014	11.2268	11.2522	11.2776	11.3030	11.3284	11.3538	11.3792	11.4046
0.450	11.4300	11.4554	11.4808	11.5062	11.5316	11.5510	11.5824	11.6078	11.6332	11.6586
0.460	11.6840	11.7094	11.7348	11.7602	11.7856	11.8110	11.8364	11.8618	11.8872	11.9126
0.470	11.9380	11.9634	11.9888	12.0142	12.0396	12.0650	12.0904	12.1158	12.1412	12.1666
0.480	12.1920	12.2174	12.2428	12.2682	12.2936	12.3190	12.3444	12.3698	12.3952	12.4206
0.490	12.4460	12.4714	12.4968	12.5222	12.5476	12.5730	12.5984	12.6238	12.6492	12.6746
0.500	12.7000	0.55				0.55-	0.555	0.55-		
Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009



for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Conversion Table - Inch/mm (continued)

Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009
0.500	12.7000	12.7254	12.7508	12.7762	12.8016	12.8270	12.8524	12.8778	12.9032	12.9286
0.510	12.9540	12.9794	13.0048	13.0302	13.0556	13.0810	13.1064	13.1318	13.1572	13.1826
0.520	13.2080	13.2334	13.2588	13.2842	13.3096	13.3350	13.3604	13.3858	13.4112	13.4366
0.530	13.4620	13.4874	13.5128	15.5382	13.5636	13.5890	13.6144	13.6398	13.6652	13.6906
0.540	13.7160	13.7414	13.7668	13.7922	13.8176	13.8430	13.8684	13.8938	13.9192	13.9446
0.550	13.9700	13.9954	14.0208	14.0462	14.0716	14.0970	14.1224	14.1478	14.1732	14.1986
0.560	14.2240	14.2494	14.2748	14.3002	14.3256	14.3510	14.3764	14.4018	14.4272	14.4526
0.570	14.4780	14.5034	14.5288	14.5542	14.5796	14.6050	14.6304	14.6558	14.6812	14.7066
0.580	14.7320	14.7574	14.7828	14.8082	14.8336	14.8590	14.8844	14.9098	14.9352	14.9606
0.590	14.9860	15.0114	15.0368	15.0622	15.0876	15.1130	15.1384	15.1638	15.1892	15.2146
0.600	15.2400	15.2654	15.2908	15.3162	15.3416	15.3670	15.3924	15.4178	15.4432	15.4686
0.610	15.4940	15.5194	15.5448	15.5702	15.5956	15.6210	15.6464	15.6718	15.6972	15.7226
0.620	15.7480	15.7734	15.7988	15.8242	15.8496	15.8750	15.9004	15.9258	15.9512	15.9766
0.630	16.0020	16.0274	16.0528	16.0782	16.1036	16.1290	16.1544	16.1798	16.2052	16.2306
0.640	16.2560	16.2814	16.3068	16.3322	16.3576	16.3830	16.4084	16.4338	16.4592	16.4846
0.650	16.5100	16.5354	16.5608	16.5862	16.6116	16.6370	16.6624	16.6878	16.7132	16.7386
0.660	16.7640	16.7894	16.8148	16.8402	16.8656	16.8910	16.9164	16.9418	16.9672	16.9926
0.670	17.0180	17.0434	17.0688	17.0942	17.1196	17.1450	17.1704	17.1958	17.2212	17.2466
0.680	17.2720	17.2974	17.3228	17.3482	17.3736	17.3990	17.4244	17.4498	17.4752	17.5006
0.690	17.5260	17.5514	17.5768	17.6022	17.6276	17.6530	17.6784	17.7038	17.7292	17.7546
0.700	17.7800	17.8054	17.8308	17.8562	17.8816	17.9070	17.9324	17.9528	17.9832	18.0086
0.710	18.0340	18.0594	18.0848	18.1102	18.1356	18.1610	18.1864	18.2118	18.2372	18.2626
0.720	18.2880	18.3134	18.3388	18.3642	18.3896	18.4150	18.4404	18.4658	18.4912	19.5166
0.730	18.5420	18.5674	18.5928	18.6182	18.6436	18.6690	18.6944	18.7198	18.7452	18.7706
0.740	18.7960	18.8214	18.8468	18.8722	18.8976	18.9230	18.9484	18.9738	18.9992	19.0246
0.750	19.0500	19.0754	19.1008	19.1262	19.1516	19.1170	19.2024	19.2278	19.2532	19.2786
0.760	19.3040	19.3294	19.3548	19.3802	19.4056	19.4310	19.4564	19.4818	19.5072	19.5326
0.770	19.5580	19.5834	19.6088	19.6342	19.6596	19.6850	19.7104	19.7358	19.7612	19.7886
0.780	19.8120	19.8374	19.8628	19.8882	19.9136	19.9390	19.9644	19.9898	20.0152	20.0406
0.790	20.0660	20.0914	20.1168	20.1422	20.1676	20.1930	20.2184	20.2438	20.2692	20.2946
0.800	20.3200	20.3454	20.3708	20.3962	20.4216	20.4470	20.4724	20.4978	20.5232	20.5486
0.810	20.5740	20.5994	20.6248	20.6502	20.6756	20.7010	20.7264	20.7518	20.7772	20.8026
0.820	20.8280	20.8534	20.8788	20.9042	20.9296	20.9550	20.9804	21.0058	21.0312	21.0566
0.830	21.0820	21.1074	21.1328	21.1582	21.1836	21.2090	21.2344	21.2598	21.2852	21.3106
0.840	21.3360	21.3614	21.3868	21.4122	21.4376	21.4630	21.4884	21.5138	21.5392	21.5646
0.850	21.5900	21.6154	21.6408	21.6662	21.6916	21.7170	21.7424	21.7678	21.7932	21.8186
0.860	21.8440	21.8694	21.8948	21.9202	21.9456	21.9710	21.9964	22.0218	22.0472	22.0726
0.870	22.0980	22.1234	22.1488	22.1742	22.1996	22.2250	22.2504	22.2758	22.3012	22.3266
0.880	22.3520	22.3774	22.4028	22.4282	22.4536	22.4790	22.5044	22.5298	22.5552	22.5806
0.890 0.900	22.6060 22.8600	22.6314 22.8854	22.6568 22.9108	22.6822 22.9362	22.7076 22.9616	22.7330 22.9870	22.7584 23.0124	22.7838 23.0378	22.8092 23.0632	22.8346 23.0886
0.910	23.1140	23.1394	23.1648	23.1902	23.2156	23.2410	23.2664	23.2918	23.3172	23.3426
0.920	23.3680	23.3934	23.4188	23.4442	23.4696	23.4950	23.5204	23.5458	23.5712	23.5966
0.930	23.6220	23.6474	23.6728	23.6982	23.7236	23.7490	23.7744	23.7998	23.8252	23.8506
0.940	23.8760	23.9014	23.9268	23.9522	23.9776	24.0030	24.0284	24.0538	24.0792	24.1046
0.950	24.1300	24.1554	24.1808	24.2062	24.2316	24.2570	24.2824	24.3078	24.3332	24.3586
0.960	24.3840	24.4094	24.4348	24.4602	24.4856	24.5110	24.5364	24.5618	24.5812	24.6126
0.970	24.6380	24.6634	24.6888	24.7142	24.7396	24.7650	24.7904	24.8158	24.8412	24.8666
0.980	24.8920	24.9174	24.9428	24.9682	24.9936	25.0190	25.0444	25.0698	25.0952	25.1206
0.990	25.1460	25.1714	25.1968	25.2222	25.2476	25.2730	25.2984	25.3228	25.3492	25.3746
1.000	25.4000									
Inch	0	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009

TYCO ELECTRONICS GLOBAL AUTOMOTIVE DIVISION



Page

AMP SUPERSEAL Connectors 1.0 mm System		
Introduction	17	✓
Contact System		
Receptacle Contacts and Cavity Plugs	18	✓
Housings and Connectors		
Plug Housing Assembly	19	√
Pin Headers	20	
		E. Commission
Application Tooling		
Introduction	21	
Numerical Index	22	
		2
		Tyro Electronics
		The same of the sa

THE PRODUCTS










√	✓	√	√



Catalog 1308072-2 Revised 6-2008

Engineering Notes

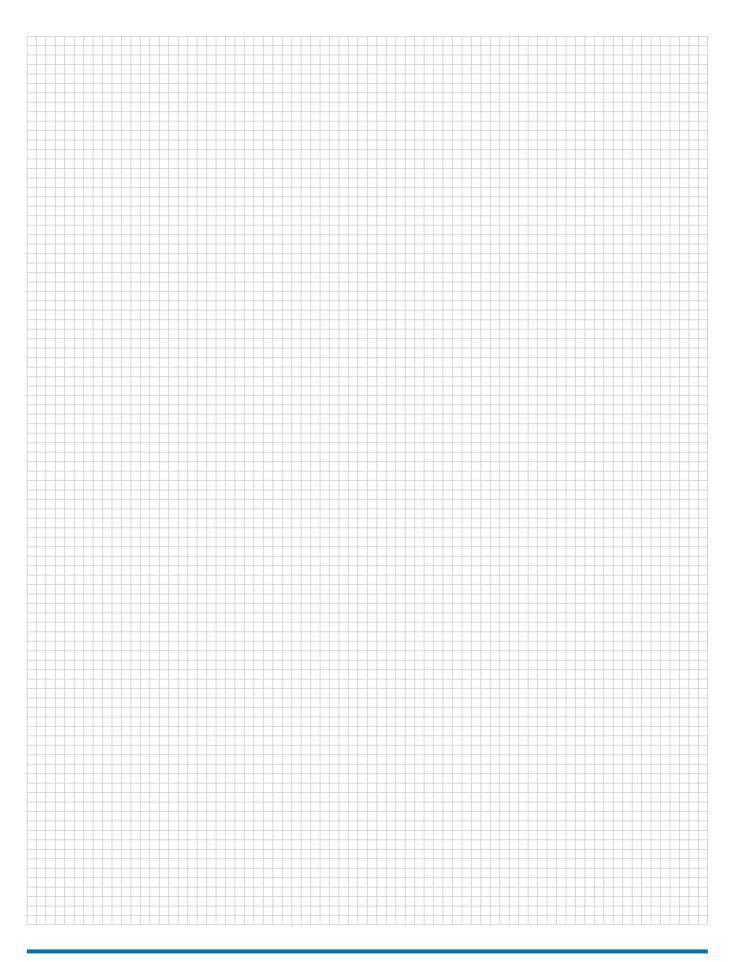



for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Introduction













Designed for the automotive industry, AMP SUPERSEAL connectors meet the sealing requirements outlined in IEC 529 and DIN 40050 I.P 6.7 specifications.

The cap and plug connector housings incorporate preassembled secondary locks to help insure correct and complete contact insertion into the housing and helps prevent the contacts from backing out during mating. The secondary lock cannot be closed if the contacts are not correctly inserted into the connector housing. Cavity plugs are available for sealing unused connector cavities.

The double spring contact design (main spring and auxiliary anti-overstress spring) insure low insertion and high contact forces.

Advantages

- Compact system minimizes packaging requirements
- Sealing reliability proven under harsh conditions
- Designed for ease of manual harness assembly, engine mounting and under hood environments

Applications

- Wire-to-Board (1.0 mm) and ECU applications, under hood or any location where sealing is required
- Suitable for automotive, truck, bus, or off-road vehicles







for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Receptacle Contacts and Cavity Plug

Technical Features

Wire Size Range: 0.5 up to 1.25 mm²

Insulation Diameter:

1.6-2.2 mm

(Larger allowed on limited basis, contact Product Engineering)

Contact Material:

Copper Alloy

Contact Finish:

Gold over Nickel (contact part) Tin over Nickel (crimp area)

Housing Material:

PBT/PET

-40 °C up to +125 °C


Current Carrying Capacity:

See Product Specification

Product Specification: 108-78140

Application Specification:

114-78011, 114-78013

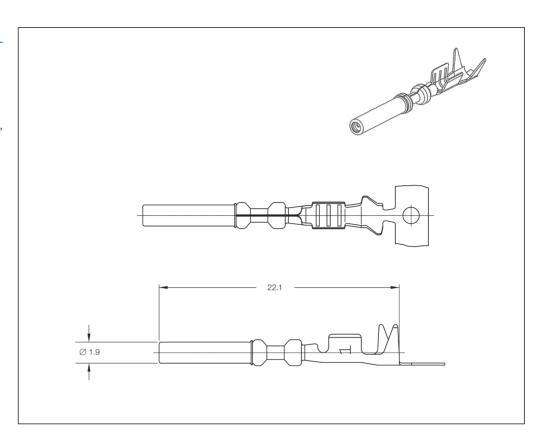


1.0 mm Receptacle Contacts

Wire Size	Insulation Part Numbers					umbers		
Range (mm²)	Diameter (mm)	Material and Finish	Strip Form	Package Quantity	Loose- Piece	Package Quantity	Applicator	Hand Tool
0.5	1.6–2.2	Copper Alloy Gold over Nickel (Contact Part) Tin over Nickel (Crimp Area)	3-1447221-4	-	-	-	1463174-2	1454509-2
0.75–0.85	1.6–2.4	Copper Alloy Gold over Nickel (Contact Part) Tin over Nickel (Crimp Area)	3-1447221-3	-	-	-	1463173-2	1454509-1
1.25	1.9–2.2	Copper Alloy Gold over Nickel (Contact Part) Tin over Nickel (Crimp Area)	3-1447221-3	-	-	-	-	1454509-1

Note: All part numbers are RoHS and ELV compliant.

Cavity Plug

Part No. 4-1437284-3

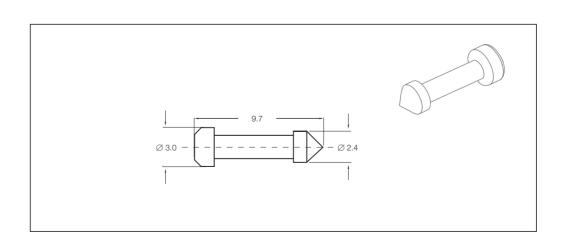






for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Plug Housing Assembly

Plug Housing Assembly for 1.0 mm Receptacle Contacts

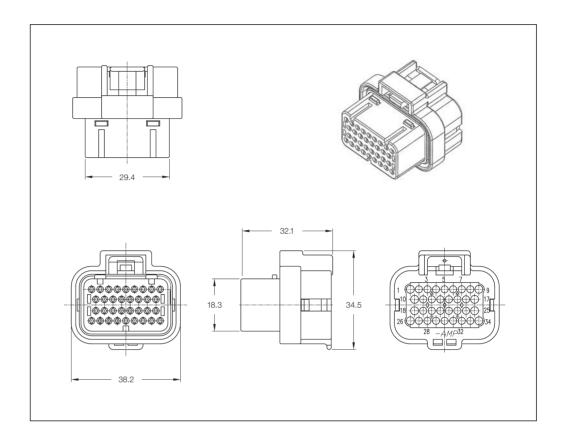

Plug Housing Assembly

No. of Positions	Part Number	Keying Type	Locking
	3-1437290-7	1	Single
	3-1437290-8	2	Single
	1473416-1	3	Single
26	1473416-2	4	Single
20	2-1437285-2	1	Double
	1-1447232-7	2	Double
	1473712-1*	1 (2 Row)	Single
	1473712-2**	1 (2 Row)	Single
	4-1437290-0	1	Single
34	4-1437290-1	2	Single
34	2-1437285-3	1	Double
	3-1437290-9	2	Double

^{*)} for Insulation Diameter 1.6-2.2 mm



^{**)} for Insulation Diameter 2.0–2.4 mm



for the Automotive Market

Catalog 1308072-2 Revised 6-2008

Pin Headers

Technical Features

Contact Material:

Brass

Contact Finish:

Gold over Ni (mating part) Tin-lead over Ni (soldering part)

Housing Material:

PBT/PET

Temperature Range:

 $-40~^{\circ}\text{C}$ up to +125 $^{\circ}\text{C}$

Current Carrying Capacity:See Product Specification


_

 $\label{lem:product Specification:} \textbf{Product Specification:}$

108-78140

 ${\bf Application\ Specification:}$

114-78011

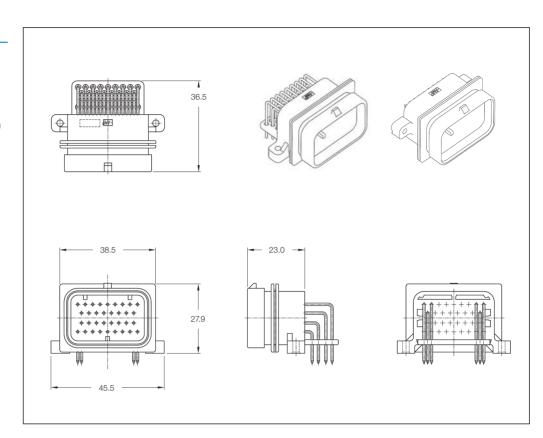

Pin Header Assembly

No. of Positions	Part Number (NEW, Tin Plating)*	Part Number (OLD, Tin-Lead Plating)**	Keying Type	Locking	Part Nu Mateable Plu	
	9-6437287-8	9-1437287-8	1 (4 Row)	Upper	3-1437290-7	
	9-6437287-9	9-1437287-9	2 (4 Row)	Upper	3-1437290-8	
	6473423-1	1473423-1	3 (4 Row)	Upper	1473416-1	
	6473423-2	1473423-2	4 (4 Row)	Upper	1473416-2	
	5-6447223-0	5-1447223-0	1 (4 Row)	Lower	3-1437290-7	
	6437288-4	1437288-4	2 (4 Row)	Lower	3-1437290-8	
26	2-6437285-8	2-1437285-8	1 (4 Row)	Double	2-1437285-2	
	2-6437285-9	2-1437285-9	2 (4 Row)	Double	1-1447232-7	
	6437288-6	1437288-6	1 (4 Row, Vertical)	Upper	3-1437290-7	
	6473418-1	1473418-1	2 (4 Row, Vertical)	Upper	3-1437290-8	
	6473418-2	1473418-2	3 (4 Row, Vertical)	Upper	1473416-1	
	6473711-1	1473711-1	1 (2 Row)	Upper	1473712-1	1.470710.0
	6473711-2	1473711-2	1 (2 Row)	Lower		1473712-2
	6437288-1	1437288-1	1 (4 Row)	Upper	4-1437290-0	
	6437288-2	1437288-2	2 (4 Row)	Upper	4-1437290-1	
	2-6437285-5	2-1437285-5	1 (4 Row)	Lower	4-1437290-0	
34	2-6437285-6	2-1437285-6	2 (4 Row)	Lower	4-1437290-1	
34	3-6437285-0	3-1437285-0	1 (4 Row)	Double	2-1437285-3	
	3-6437285-1	3-1437285-1	2 (4 Row)	Double	3-1437290-9	
	2-6447232-3	2-1447232-3	1 (4 Row, Vertical)	Upper	4-1437290-0	
	2-6447232-4	2-1447232-4	2 (4 Row, Vertical)	Upper	4-1437290-1	
	6437288-3	1437288-3	1 (4 Row)	Upper	4-1437290-0 (34P),	3-1437290-7 (26P)
60	6473427-1	1473427-1	2 + 3 (4 Row)	Upper	4-1437290-1 (34P),	1473416-1 (26P)
60	6437288-5	1437288-5	1 (4 Row)	Lower	4-1437290-0 (34P),	3-1437290-7 (26P)
	3-6437285-2	3-1437285-2	1 (4 Row)	Double	2-1437285-3 (34P),	2-1437285-2 (26P)

Note: *) All part numbers are used Tin Plating as Lead Free programs, shifting products to NEW is strongly recommended.

**) All part numbers are used Tin-Lead Plating (lead in solderable interface only).



Application Tooling

Catalog 1308072-2 Revised 6-2008

Introduction













Application Tooling from Tyco Electronics is designed to perform perfect terminations, time after time. This results in productivity gains, yielding more terminations for less money at the time of application, and in service.

It is this combination of superior quality at a lower installed end cost that distinguishes the Tyco Electronics system solution.

Because production requirements vary, GATD – Global Application Tooling Division – can provide various levels of tooling to meet the full spectrum of output requirements. The continuous support by our field service completes the Tyco Electronics system. Our field service engineers ensure the application equipment fulfil all requirements at any given time.

Please use the tooling website and the online search to find the tooling that best suits your application.

Put your terminal part number either into the hand tool or applicator database and the appropriate tool will be shown.

If you can't find what you are looking for, it does not necessarily mean that there is nothing available for your application:

For cross-referencing information – contact one of our Product Information Centers (PIC), listed in the selection from the left-hand menu box.

For more complex equipment and technical help – find your country contact by selecting from the left-hand menu box or contact your Tyco Electronics representative.

www.tooling.tycoelectronics.com



Catalog 1308072-2 Revised 6-2008

Numerical Index

Part Number	Page
547203-1	9
4-1437284-3	18
2-1437285-2	19, 20
2-1437285-3	19, 20
2-1437285-5	20
2-1437285-6	20
2-1437285-8	20
2-1437285-9	20
3-1437285-0	20
3-1437285-1	20
3-1437285-2	20
9-1437287-8	20
9-1437287-9	20
1437288-1	20
1437288-2	20
1437288-3	20
1437288-4	20
1437288-5	20
1437288-6	20
3-1437290-7	19, 20
3-1437290-8	19, 20
3-1437290-9	19, 20
4-1437290-0	19, 20
4-1437290-1	19, 20


Part Number	Page
3-1447221-3	18
3-1447221-4	18
5-1447223-0	20
1-1447232-7	19
2-1447232-3	20
2-1447232-4	20
1454509-1	18
1454509-2	18
1463173-2	18
1463174-2	18
1473416-1	19, 20
1473416-2	19, 20
1473418-1	20
1473418-2	20
1473423-1	20
1473423-2	20
1473427-1	20
1473711-1	20
1473711-2	20
1473712-1	19, 20
1473712-2	19, 20
2-6437285-5	20
2-6437285-6	20
2-6437285-8	20

Part Number	Page
2-6437285-9	20
3-6437285-0	20
3-6437285-1	20
3-6437285-2	20
9-6437287-8	20
9-6437287-9	20
6437288-1	20
6437288-2	20
6437288-3	20
6437288-4	20
6437288-5	20
6437288-6	20
5-6447223-0	20
2-6447232-3	20
2-6447232-4	20
6473418-1	20
6473418-2	20
6473423-1	20
6473423-2	20
6473427-1	20
6473711-1	20
6473711-2	20
I	



Catalog 1308072-2 Revised 6-2008


Engineering Notes

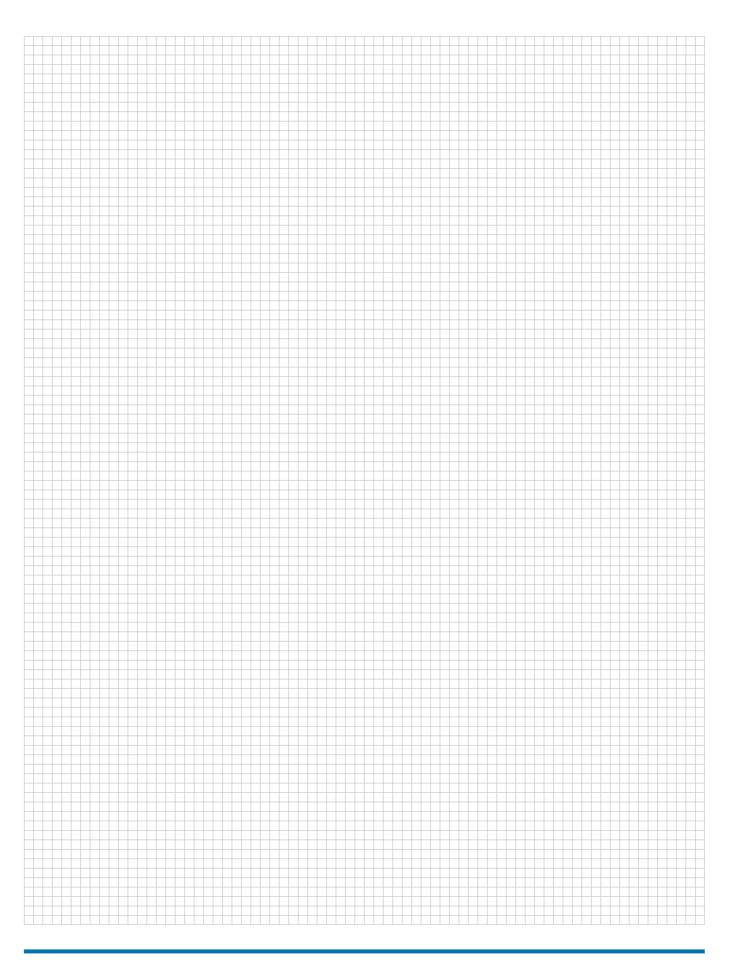



Catalog 1308072-2 Revised 6-2008

Engineering Notes

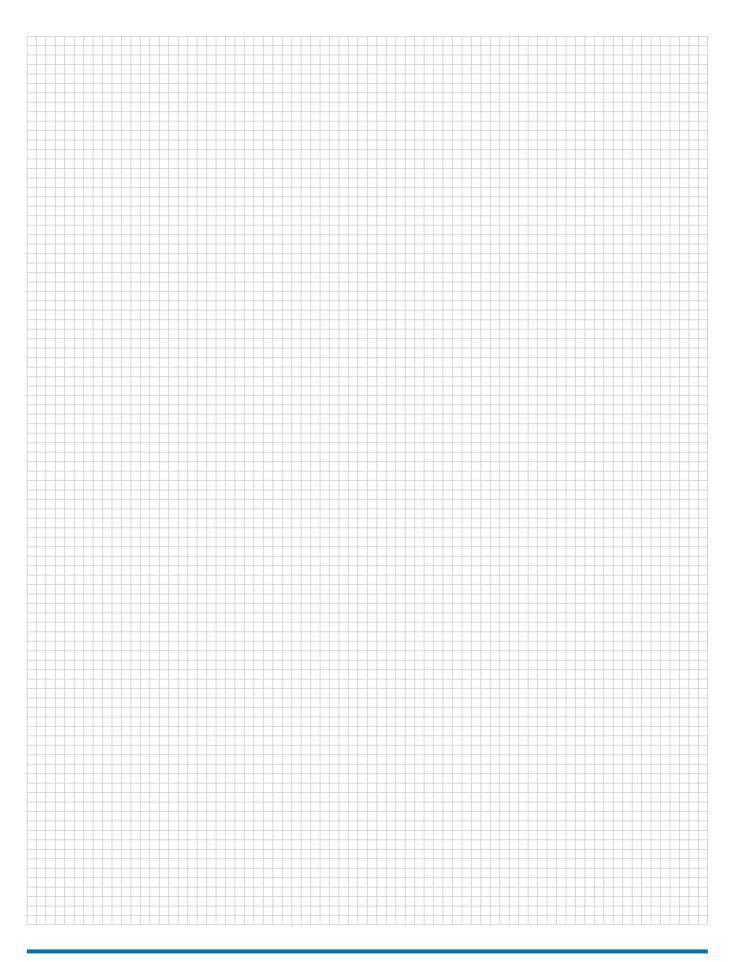



Global Contacts

Americas

Argentina - Buenos Aires Phone: +54-11-4733-2200 Fax: +54-11-4733-2211

Brasil - São Paulo Phone: +55-11-2103-6105 Fax: +55-11-2103-6204

 Canada
 - Toronto

 Phone:
 +1-905-475-6222

 Fax:
 +1-905-474-5520

 Product
 Information Center:

 Phone:
 +1-905-470-4425

+1-905-474-5525

Colombia - Bogota Phone: +57-1-231-9398 Fax: +57-1-660-0206

 Mexico
 - Mexico City

 Phone:
 +52-55-1106-0800

 +01-800-733-8926

 Fax:
 +52-55-1106-0901

For Latin/South American Countries not shown

Phone: +54-11-4733-2015 Fax: +54-11-4733-2083 **United States**

Harrisburg, PA Phone: +1-717-564-0100 Fax: +1-717-986-7575 Product Information Center: Phone: +1-800-522-6752 Fax: +1-717-986-7575

Troy, MI

Phone: +1-248-273-3359 Fax: +1-248-273-3322

Asia/Pacific

 Australia - Sydney

 Phone:
 +61-2-9554-2600

 Fax:
 +61-2-9502-2556

 Product
 Information Center:

 Phone:
 +61-2-9840-8200

 Fax:
 +61-2-9634-6188

India - Bangalore Phone: +91-80-285-40800 Fax: +91-80-285-40820

Indonesia – Jakarta Phone: +65-6482-0311 Fax: +65-6482-1012

 Japan Kawasaki, Kanagawa

 Phone:
 +81-44-844-8111

 Fax:
 +81-44-812-3207

 Product
 Information Center:

 Phone:
 +81-44-844-8013

 Fax:
 +81-44-812-3200

Korea - Seoul Phone: +82-2-3415-4500 Fax: +82-2-3486-3810

Malaysia - Selangor Phone: +60-3-7805-3055 Fax: +60-3-7805-3066 **New Zealand** - Auckland Phone: +64-9-634-4580 Fax: +64-9-634-4586

Philippines - Makati City Phone: +632-848-0171 Fax: +632-867-8661

People's Republic of China

Hong Kong
Phone: +852-

Phone: +852-2735-1628 Fax: +852-2735-0243

Shanghai

Phone: +86-21-2407-1588 Fax: +86-21-2407-1599 **Singapore** - Singapore Phone: +65-6482-0311 Fax: +65-6482-1012

Taiwan - Taipei

Phone: +886-2-8768-2788 Fax: +886-2-8768-2268

Thailand - Bangkok Phone: +66-2-955-0500 Fax: +66-2-955-0505

Vietnam - Ho Chi Minh City Phone: +84-8-930-5546 Fax: +84-8-930-3443

Europe/Middle East/Africa

Austria - Vienna Phone: +43-1-905-60-0 Fax: +43-1-905-60-1333 Product Information Center: Phone: +43-1-905-60-1249 Fax: +43-1-905-60-1251

Belarus - Minsk Phone: +375-17-237-47-94 Fax: +375-17-237-47-94

Belgium - Kessel-Lo Phone: +32-16-352-300 Fax: +32-16-352-352

Bulgaria - Sofia Phone: +359-2-971-2152 Fax: +359-2-971-2153

Czech Republic and Slovakia Czech Republic - Kurim

Phone: +420-541-162-111 Fax: +420-541-162-223 Product Information Center: Phone: +420-541-162-113 Fax: +420-541-162-132

Denmark - Glostrup Phone: +45-43-48-04-00 Fax: +45-43-44-14-14

Egypt - Cairo Phone: +202-419-2334 Fax: +202-417-7647

Estonia - Tartu Phone: +372-5138-274 Fax: +372-7400-779

Finland - Helsinki Phone: +358-95-12-34-20 Fax: +358-95-12-34-250 **France** - Cergy-Pontoise Cedex Phone: +33-1-3420-8888 Fax: +33-1-3420-8600

Fax: +33-1-3420-8600 Product Information Center: Phone: +33-1-3420-8686 Fax: +33-1-3420-8623

France Export Divisions -

Cergy-Pontoise Cedex Phone: +33-1-3420-8866 Fax: +33-1-3420-8300

Germany - Bensheim Phone: +49-6251-133-0 Fax: +49-6251-133-1600 Product Information Center: Phone: +49-6251-133-1999 Fax: +49-6251-133-1988

Greece - Athens

Phone: +30-210-9370-396/397 Fax: +30-210-9370-655

Hungary - Budapest Phone: +36-1-289-1000 Fax: +36-1-289-1010 Product Information Center:

Phone: +36-1-289-1016 Fax: +36-1-289-1017

Ireland - Dublin Phone: +353-1-866-5612 Fax: +353-1-866-5714

Israel - Petach-Tikva Phone: +972-3-929-0999 Fax: +972-3-919-1088

Italy - Collegno (Torino)
Phone: +39-011-4012-111
Fax: +39-011-4031-116
Product Information Center:
Phone: +39-011-4012-428
Fax: +39-011-40-287-428

Lithuania and Latvia

Lithuania - Vilnius Phone: +370-5-213-1402 Fax: +370-5-213-1403 Product Information Center: Phone: +370-5-211-3016 Fax: +370-5-213-1403

Netherlands - 's-Hertogenbosch Phone: +31-73-6246-246 Fax: +31-73-6212-365 Product Information Center: Phone: +31-73-6246-999 Fax: +31-73-6246-998

Norway - Nesbru Phone: +47-66-77-88-50 Fax: +47-66-77-88-55

Poland - Warsaw
Phone: +48-22-4576-700
Fax: +48-22-4576-720
Product Information Center:
Phone: +48-22-4576-704
Fax: +48-22-4576-720

Romania - Bucharest Phone: +40-21-311-3479/3596 Fax: +40-21-312-0574

Russia - Moscow Phone: +7-495-790-7902 Fax: +7-495-721-1893 Product Information Center: Phone: +7-495-790-7902-503 Fax: +7-495-721-1893

Russia - St. Petersburg Phone: +7-812-718-8192 Fax: +7-812-718-8193

Slovenia – Ljubljana Phone: +386-1561-3270 Fax: +386-1561-3240 **South Africa** – Port Elizabeth Phone: +27-41-503-4500 Fax: +27-41-581-0440

Spain - Barcelona Phone: +34-93-291-0330 Fax: +34-93-201-7879

Sweden - Upplands Väsby Phone: +46-8-50-72-50-00 Fax: +46-8-50-72-50-01

Switzerland - Steinach Phone: +41-71-447-0447 Fax: +41-71-447-0444

Turkey - Istanbul Phone: +90-212-281-8181-83


Phone: +90-212-281-8181-83 +90-212-282-5130/5430 Fax: +90-212-281-8184

Ukraine - Kiev Phone: +380-44-206-2265 Fax: +380-44-206-2264 Product Information Center: Phone: +380-44-206-2265 Fax: +380-44-206-2264

United Kingdom -

Stanmore, Middlesex Phone: +44-8706-080208 Fax: +44-208-954-6234 Product Information Center: Freephone (UK only): 0800-267-666

Phone: +44-8706-080208 Fax: +44-208-420-8095

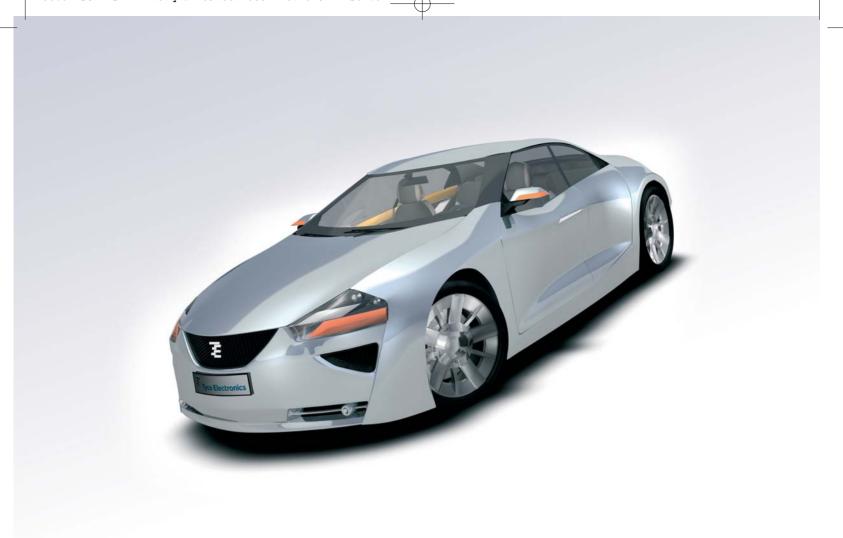

Tyco Electronics AMP GmbH

AMPèrestr. 12-14

64625 Bensheim / Germany Phone: +49-(0)6251-133-0 Fax: +49-(0)6251-133-1600

www.tycoelectronics.com AMP, AMP SUPERSEAL, TE Logo and Tyco Electronics are trademarks

Tyco Electronics AMP GmbH certified acc. ISO 14001 and ISO/TS 16949:2002

© 2008 Tyco Electronics Ltd. 1308072-2 Revised 6-2008 3M ST