



Dimensions

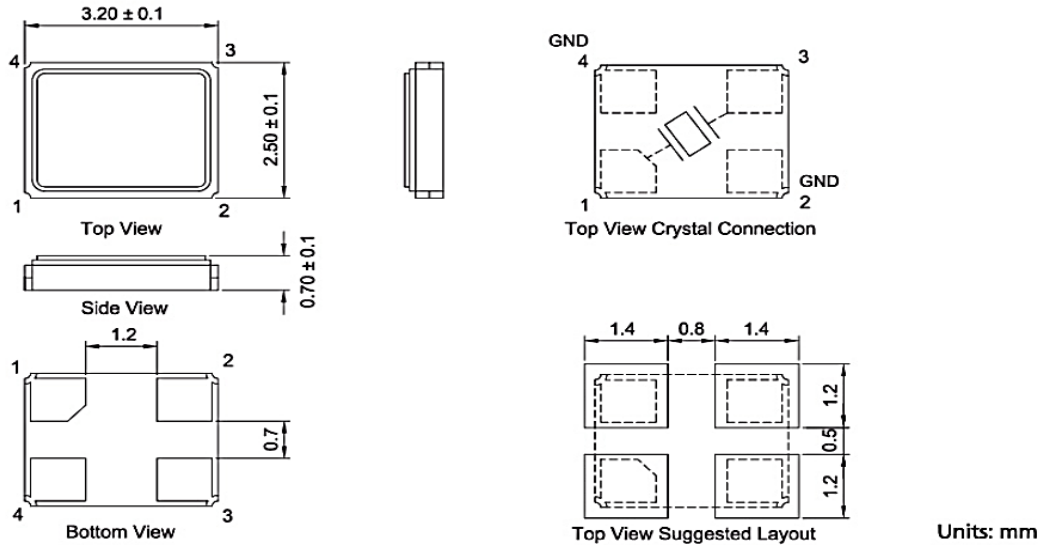

Ordering Information


7M	-	20.000M	A	H	E	-	T
Frequency in Hz		Frequency Tolerance (at 25°C)		Frequency Stability (over Temp.)		Packaging Method	
Please contact us for available frequencies		A ± 30 ppm D ± 20 ppm E ± 10 ppm		A ± 30 ppm (-20°C ~ +70°C) D ± 20 ppm (-20°C ~ +70°C) E ± 10 ppm (-20°C ~ +70°C) T ± 10 ppm (-30°C ~ +85°C) H ± 30 ppm (-40°C ~ +85°C) I ± 20 ppm (-40°C ~ +85°C) J ± 15 ppm (-40°C ~ +85°C) K ± 60 ppm (-40°C ~ +125°C)		T Tape & Reel	
						Load Capacitance	
						B 6 pF V 8 pF C 9 pF Q 10 pF E 12 pF I 16 pF J 18 pF K 20 pF	

Packing

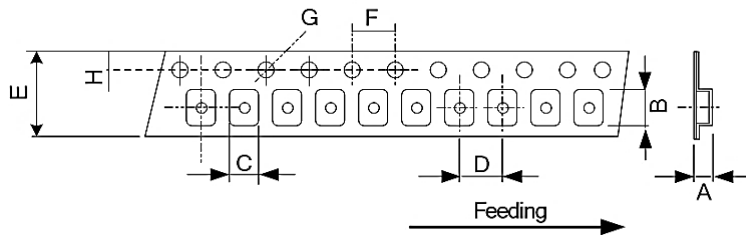

DIMENSIONS	A	B	C	D	E	F	G	H
	1.65 ±0.10	3.40 ±0.10	2.70 ±0.10	4.00 ±0.10	8.00 ±0.20	4.00 ±0.10	1.55 ±0.05	1.75 ±0.10

(Unit: mm)

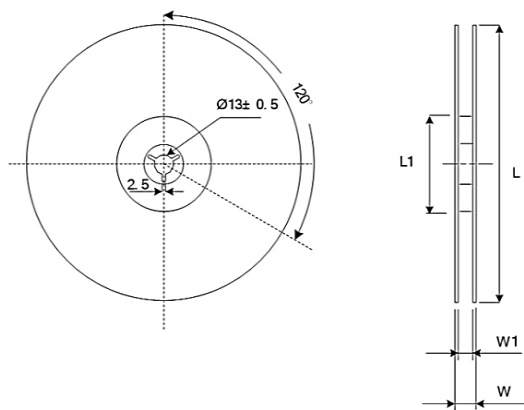

DIMENSIONS	L	L1	W	W1
	178 ±1.00	60.2 ±0.50	11.5 ±0.2	8 ±0.1

(Unit: mm)

Reflow Profile

Solder melting point : $220^{\circ}\text{C} \pm 10^{\circ}\text{C}$, 60 sec. Min.

Peak temperature : $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$, 10 sec. Min.

