

SHARC Processor Target Applications

ADSP-21488/ADSP-21489: Highest performing 32-bit floating-point processor in a QFP package positioned for automotive audio and industrial/instrumentation applications.

ADSP-21483/ADSP-21486/ADSP-21487: Highest performance SHARC processor for consumer audio solutions.

ADSP-21478/ADSP-21479: Lowest power 32-bit floating-point SHARC processor positioned for automotive audio, portable medical, and instrumentation applications.

ADSP-21469: Highest performance processor positioned for professional audio and industrial/instrumentation applications.

ADSP-21467: Highest performance SHARC processor for consumer audio solutions.

ADSP-21371/ADSP-21375: Value-priced processors positioned for professional audio, industrial/instrumentation, and medical applications.

ADSP-21368/ADSP-21369: Highest performance processors for professional audio and industrial/instrumentation applications.

ADSP-21363/ADSP-21364: High performance processors for general-purpose and professional audio applications.

ADSP-21266/ADSP-21366/ADSP-21367: Highly integrated processors optimized for consumer audio, home theater, and next-generation DVD applications.

ADSP-21262/ADSP-21261: Low cost, floating-point processor created for consumer audio, wireless communication, medical appliances, and professional audio.

ADSP-21161: Optimized for single processor or small multiprocessor systems such as speech recognition, motor control, industrial, and medical applications.

ADSP-21160: For multiprocessing applications such as medical, military, imaging, and communications.

ADSP-21065L: Outstanding price/performance value for a broad base of consumer, communications, automotive, industrial, and computer applications.

SHARC Processors

Part Number	Package	Speed (MHz)	On-Chip Memory SRAM/ROM (Mb)	Temp Range (°C)	Key Peripherals	Price Range @ 1k (\$U.S.) ¹	
ADSP-21489BSWZ-2A	100-lead LQFP E-pad	300	5/4	−40 to +85 ambient	2 timers, 1 UART, 8 SPORTs, 8-channel ASRC, 2 SPIs, 16-bit SDRAM interface, 1 TWI, 4 PCGs, PWM, S/PDIF Rx/Tx Integrated audio decoders (ADSP-21483/ADSP-21486/ ADSP-21487 only)	12.86 to 19.85	
ADSP-21489BSWZ-2B	176-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21489KSWZ-2A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21489KSWZ-2B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21489BSWZ-3A	100-lead LQFP E-pad	350		−40 to +85 ambient			
ADSP-21489BSWZ-3B	176-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21489KSWZ-3A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21489KSWZ-3B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21489BSWZ-4A	100-lead LQFP E-pad	400		−40 to +85 ambient			
ADSP-21489BSWZ-4B	176-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21489KSWZ-4A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21489KSWZ-4B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21488BSWZ-2A	100-lead LQFP E-pad	300	3/4	−40 to +85 ambient	2 timers, 1 UART, 8 SPORTs, 8-channel ASRC, 2 SPIs, 16-bit SDRAM interface, 1 TWI, 4 PCGs, PWM, S/PDIF Rx/Tx Integrated audio decoders (ADSP-21483/ADSP-21486/ ADSP-21487 only)	8.54 to 12.62	
ADSP-21488BSWZ-2B	176-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21488KSWZ-2A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21488KSWZ-2B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21488BSWZ-3A	100-lead LQFP E-pad	350		−40 to +85 ambient			
ADSP-21488BSWZ-3B	176-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21488KSWZ-3A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21488KSWZ-3B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21488BSWZ-4A	100-lead LQFP E-pad	400		−40 to +85 ambient			
ADSP-21488BSWZ-4B	176-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21488KSWZ-4A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21488KSWZ-4B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21487KSWZ-3B	176-lead LQFP E-pad	350		5/4			0 to 70 ambient
ADSP-21487KSWZ-4B	176-lead LQFP E-pad	400	0 to 70 ambient				
ADSP-21486KSWZ-3A	100-lead LQFP E-pad	350	5/4	0 to 70 ambient		Contact ADI	
ADSP-21486KSWZ-3B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21486KSWZ-4A	100-lead LQFP E-pad	400	3/4	0 to 70 ambient			Contact ADI
ADSP-21486KSWZ-4B	176-lead LQFP E-pad			0 to 70 ambient			
ADSP-21483KSWZ-3B	176-lead LQFP E-pad	350		0 to 70 ambient			
ADSP-21483KSWZ-4B	176-lead LQFP E-pad	400		0 to 70 ambient			
ADSP-21479BBCZ-1B	196-ball CSP_BGA	200	5/4	−40 to +85 ambient	2 timers, 1 UART, 8 SPORTs, 8-channel ASRC, 2 SPIs, 16-bit SDRAM interface, 1 TWI, 4 PCGs, PWM, S/PDIF Rx/Tx, WDT RTC (196-ball CSP_BGA only)	8.81 to 10.64	
ADSP-21479BSWZ-1A	100-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21479KBCZ-1B	196-ball CSP_BGA			0 to 70 ambient			
ADSP-21479KSWZ-1A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21479BBCZ-2B	196-ball CSP_BGA	266		−40 to +85 ambient			
ADSP-21479BSWZ-2A	100-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21479KBCZ-2B	196-ball CSP_BGA			0 to 70 ambient			
ADSP-21479KSWZ-2A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21478BBCZ-1B	196-ball CSP_BGA	200	3/4	−40 to +85 ambient		7.99 to 9.25	
ADSP-21478BSWZ-1A	100-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21478KBCZ-1B	196-ball CSP_BGA			0 to 70 ambient			
ADSP-21478KSWZ-1A	100-lead LQFP E-pad			0 to 70 ambient			
ADSP-21478BBCZ-2B	196-ball CSP_BGA	266		−40 to +85 ambient			
ADSP-21478BSWZ-2A	100-lead LQFP E-pad			−40 to +85 ambient			
ADSP-21478KBCZ-2B	196-ball CSP_BGA			0 to 70 ambient			
ADSP-21478KSWZ-2A	100-lead LQFP E-pad			0 to 70 ambient			

¹All pricing is budgetary and subject to change.

SHARC Processors (continued)

Part Number	Package	Speed (MHz)	On-Chip Memory SRAM/ROM (Mb)	Temp Range (°C)	Key Peripherals	Price Range @ 1k (\$U.S.) ¹		
ADSP-21469BPCZ-3 ³	324-ball PBGA	400	5/4	−40 to +85 ambient	2 timers, 1 UART, 8 SPORTs, 8-channel ASRC, 2 SPIs, 16-bit DDR2 interface, 1 TWI, 4 PCGs, PWM, S/PDIF Rx/Tx, DAI, DPI, link ports	28.50 to 37.80		
ADSP-21469KBCZ-3 ³				0 to 70 ambient				
ADSP-21469KBCZ-4 ³		450						
ADSP-21467KBPZ-3	324-ball PBGA	400		0 to 70 ambient	Integrated audio decoders (ADSP-21467 only) ²			
ADSP-21467KBPZ-4		450						
ADSP-21375BSWZ-2B	208-lead LQFP E-pad	266	0.5/2	−40 to +85 ambient	2 timers, 1 UART, 4 SPORTs, 2 SPIs, 1 TWI, 4 PCGs, PWM, DAI, 16-bit SDRAM interface	9.83 to 11.79		
ADSP-21375KSWZ-2B				0 to 70 ambient				
ADSP-21371BSWZ-2B	208-lead LQFP E-pad	266	1/4	−40 to +85 ambient	2 timers, 1 UART, 8 SPORTs, 2 SPIs, 1 TWI, S/PDIF Rx/Tx, 4 PCGs, PWM, DAI, 32-bit SDRAM interface	13.27 to 15.92		
ADSP-21371KSWZ-2A ²				0 to 70 ambient				
ADSP-21371KSWZ-2B								
ADSP-21369BSWZ-1A	208-lead LQFP E-pad	266	2/6	−40 to +85 ambient	3 timers, 2 UARTs, 8 SPORTs, 2 SPIs, 1 TWI, S/PDIF Rx/Tx, 4 PCGs, PWM, 8-channel ASRC, 32-bit SDRAM interface Shared external memory support (ADSP-21368 only) Integrated audio decoders in ROM (ADSP-21367 only) ²	19.69 to 36.10		
ADSP-21369KSWZ-1A	208-lead MQFP			0 to 70 ambient				
ADSP-21369BBP-2A	256-ball SBGA	−40 to +85 ambient						
ADSP-21369BBPZ-2A								
ADSP-21369BSWZ-2A	208-lead LQFP E-pad			0 to 70 ambient				
ADSP-21369KBP-2A								
ADSP-21369KBPZ-2A								
ADSP-21369KSWZ-2A	208-lead LQFP E-pad							
ADSP-21369KSWZ-4A		350						
ADSP-21369KSWZ-5A		366						
ADSP-21369KBPZ-3A	256-ball SBGA	400		−40 to +85 ambient		31.04 to 45.53		
ADSP-21368BBP-2A	256-ball SBGA	333						
ADSP-21368BBPZ-2A								
ADSP-21368KBP-2A								
ADSP-21368KBPZ-2A								
ADSP-21368KBPZ-3A		400						
ADSP-21367BSWZ-1A	208-lead LQFP E-pad	266		−40 to +85 ambient		20.73 to 37.99		
ADSP-21367KSWZ-1A	208-lead MQFP			0 to 70 ambient				
ADSP-21367BBP-2A	256-ball SBGA	333		−40 to +85 ambient				
ADSP-21367BBPZ-2A								
ADSP-21367KBP-2A								
ADSP-21367KBPZ-2A								
ADSP-21367KSWZ-2A				208-lead LQFP E-pad				
ADSP-21367KSWZ-4A	350							
ADSP-21367KSWZ-5A	366							
ADSP-21367KBPZ-3A	256-ball SBGA	400						
ADSP-21366YSWZ-2AA ³	144-lead LQFP E-pad	200	3/4	−40 to +105 ambient	3 timers, 6 SPORTs, DAI, 2 SPIs, 2 PCGs, PWM, 8-channel ASRC, S/PDIF Rx/Tx Integrated audio decoders in ROM (ADSP-21366 only) ²	22.60 to 32.55		
ADSP-21366BBC-1AA	136-ball CSP_BGA	333		−40 to +85 ambient				
ADSP-21366BBCZ-1AA ³								
ADSP-21366BSWZ-1AA ³	144-lead LQFP							
ADSP-21366KSWZ-1AA	144-lead LQFP E-pad							
ADSP-21366KBC-1AA	136-ball CSP_BGA			0 to 70 ambient				
ADSP-21366KBCZ-1AA								
ADSP-21364YSWZ-2AA ³	144-lead LQFP E-pad	200		−40 to +105 ambient	3 timers, 6 SPORTs, 2 SPIs, S/PDIF Rx/Tx (not on ADSP-21363), 8-channel ASRC (not on ADSP-21363), 2 PCGs, PWM, DAI	29.75 to 42.85		
ADSP-21364BBC-1AA	136-ball CSP_BGA	−40 to +85 ambient						
ADSP-21364BBCZ-1AA ³								
ADSP-21364BSWZ-1AA ³	144-lead LQFP E-pad							
ADSP-21364KBC-1AA				136-ball CSP_BGA				
ADSP-21364KBCZ-1AA								
ADSP-21364KSWZ-1AA	144-lead LQFP E-pad							

¹All pricing is budgetary and subject to change.²License agreement required from respective IP holders prior to purchase for all products containing integrated audio decoders or DTCP acceleration hardware.³Available in automotive grade.

SHARC Processors (continued)

Part Number	Package	Speed (MHz)	On-Chip Memory SRAM/ROM (Mb)	Temp Range (°C)	Key Peripherals	Price Range @ 1k (\$U.S.) ¹
ADSP-21363YSWZ-2AA ³	144-lead LQFP E-pad	200	3/4	−40 to +105 ambient	3 timers, 6 SPORTs, 2 SPIs, S/PDIF Rx/Tx (not on ADSP-21363), 8-channel ASRC (not on ADSP-21363), 2 PCGs, PWM, DAI	20.22 to 29.13
ADSP-21363BBC-1AA	136-ball CSP_BGA	333		−40 to +85 ambient		
ADSP-21363BBCZ-1AA ³						
ADSP-21363BSWZ-1AA ³	144-lead LQFP E-pad			0 to 70 ambient		
ADSP-21363KBC-1AA	136-ball CSP_BGA					
ADSP-21363KBCZ-1AA						
ADSP-21363KSWZ-1AA						
ADSP-21266SKSTZ-1B	144-lead LQFP		150	2/4	0 to 70 ambient	3 timers, 6 SPORTs, 1 SPI, integrated audio decoders in ROM (ADSP-21266 only), ² 2 PCGs, DAI
ADSP-21266SKSTZ-1C						
ADSP-21266SKSTZ-1D						
ADSP-21266SKBCZ-2B	136-ball CSP_BGA	200				
ADSP-21266SKBCZ-2C						
ADSP-21266SKBCZ-2D						
ADSP-21266SKSTZ-2B	144-lead LQFP					
ADSP-21266SKSTZ-2C						
ADSP-21266SKSTZ-2D						
ADSP-21262SBBC-150	136-ball CSP_BGA	150	−40 to +85 ambient		3 timers, 6 SPORTs, 1 SPI, 2 PCGs, DAI	17.15 to 24.14
ADSP-21262SBBCZ150 ³		200	0 to 70 ambient			
ADSP-21262SKBC-200						
ADSP-21262SKBCZ200						
ADSP-21262SKSTZ200	144-lead LQFP					
ADSP-21261SKBC-150	136-ball CSP_BGA	150	1/3	0 to 70 ambient	3 timers, 4 SPORTs, 1 SPI, 2 PCGs, DAI, 4 SPORTs, 2 link ports, 1 SPI, DMA controller	6.64 to 7.31
ADSP-21261SKBCZ150						
ADSP-21261SKSTZ150	144-lead LQFP					
ADSP-21161NCCA-100	225-ball CSP_BGA	100	1/—	−40 to +85 ambient		26.17 to 34.54
ADSP-21161NCCAZ100						
ADSP-21161NKCA-100						
ADSP-21161NKCAZ100						
ADSP-21160MKB-80	225-ball CSP_BGA	80	4/—	0 to 85 case	2 SPORTs, 4 link ports, DMA controller	169.49 to 199.29
ADSP-21160MKBZ-80						
ADSP-21160NCB-100		100		−40 to +100 case		
ADSP-21160NCBZ-100						
ADSP-21160NKB-100						
ADSP-21160NKBZ-100						
ADSP-21065LCCA-240	196-ball CSP_BGA	60	0.5/—	−40 to +100 case	2 SPORTs, DMA controller, 2 timers	22.85 to 66.63
ADSP-21065LCCAZ240				208-lead MQFP		
ADSP-21065LCSZ-240	196-ball CSP_BGA					
ADSP-21065LKCA-240						
ADSP-21065LKCAZ240	208-lead MQFP					
ADSP-21065LKSZ-240	196-ball CSP_BGA					
ADSP-21065LKCA-264						
ADSP-21065LKCAZ264						
ADSP-21065LKSZ-264	208-lead MQFP					

¹All pricing is budgetary and subject to change.²License agreement required from respective IP holders prior to purchase for all products containing integrated audio decoders or DTCP acceleration hardware.³Available in automotive grade.

Development Tools

Analog Devices CROSSCORE development tools offer easy and robust methods for engineers to develop and optimize systems by shortening product development cycles, reducing time to market.

VisualDSP++ Integrated Development Environment

VisualDSP++[®] software is an easy-to-install, easy to use, integrated development and debugging environment (IDDE). For more information and to download a free 90-day test drive, visit www.analog.com/testdrive.

EZ-KIT Lite Evaluation Kit

EZ-KIT Lite[®] systems consist of a standalone evaluation board and VisualDSP++ evaluation suite to facilitate architecture evaluations via a PC-hosted tool set. Users can evaluate ADI's processors, learn about digital signal processing applications, as well as simulate, debug, and prototype applications.

EZ-Extender Daughter Boards

EZ-Extender[®] daughter boards give developers access to and the ability to connect to various peripherals from Analog Devices and third parties via the expansion interface of the EZ-KIT Lite evaluation kits.

EZ-Board Evaluation Board

The EZ-Board[™] evaluation board provides developers with a low cost platform for initial evaluation of the processors via an external emulator or μ Clinux.[™] The EZ-Board evaluation board has an expansion interface that allows for modularity with different EZ-Extender boards.

Debug Agent Board

The Standalone Debug Agent is intended to provide a modular low cost emulation solution for EZ-Board evaluation boards, as well as those designed by third parties. The Standalone Debug Agent is very similar to the Debug Agent that is on existing EZ-KIT Lite evaluation kits but will have the flexibility to move from one board to another board.

Universal Serial Bus-Based Emulators

Analog Devices' cost-effective USB-based emulator and high performance (HP) USB-based emulators provide an easy, portable, nonintrusive, target-based debugging solution for Analog Devices JTAG processors and DSPs. These powerful USB-based emulators perform a wide range of emulation functions, including single-step and full speed execution with predefined breakpoints, and viewing and/or altering of register and memory contents.

Software Modules

Analog Devices has a wide range of tested and optimized software modules available, including decoders, encoders, codecs, and other algorithms that provide multimedia functions for the Blackfin[®] and SHARC processor families. The software modules allow engineers to quickly and easily incorporate these functions, providing a faster development path to the end product. In addition, the highly optimized software modules feature a consistent API and framework to ensure rapid development of multiple functions.

SHARC Processor Development Tools

Processor	Hardware	Emulator	Software	Additional Software Available
ADSP-21161N				
ADSP-21261 ADSP-21262 ADSP-21266	ADZS-21262-EZLITE Key Features • ADSP-21262 SHARC processor • 1M × 8-bit flash memory • 512k × 8-bit SRAM • 512k bit SPI flash memory • AD1835 stereo, 96 kHz, 24-bit S-D codec • 4 × 2 RCA jack for 4 channels of stereo audio output • 1 × 2 RCA jack for 1 channel of stereo audio input • Headphone jack (connected to 1 of the stereo outputs) • 2M bit SPI flash memory • USB-based debugger interface ADDS-21262-1-EZEXT ADSZ-SHRCUSB-EZEXT			
ADSP-21363 ADSP-21364 ADSP-21366	ADZS-21364-EZLITE Key Features • ADSP-21364 SHARC processor • 1M × 8-bit flash memory • 512k × 8-bit SRAM • 2M bit SPI flash memory • AD1835 stereo, 96 kHz, 24-bit codec • USB-based debugger interface ADSZ-SHRCUSB-EZEXT			
ADSP-21367 ADSP-21368 ADSP-21369	ADZS-21369-EZLITE Key Features • ADSP-21369 SHARC processor • AD1835 stereo, 96 kHz, 24-bit codec • 1M × 8-bit flash memory • 1M × 32-bit × 4 banks SDRAM • 512k × 8-bit SRAM • 2M bit SPI flash memory • ADM3202 RS-232 driver/receiver • USB-based debugger interface ADSZ-SHRCUSB-EZEXT			MathWorks™
ADSP-21371 ADSP-21375	ADZS-21371-EZLITE Key Features • ADSP-21371 SHARC processor • 1M × 8-bit flash memory • 128 MB (1M × 32-bit × 4 banks) SDRAM • 2 MB SPI flash memory • AD1835 stereo, 96 kHz, 24-bit codec • USB-based debugger interface ADZS-21375-EZLITE Key Features • ADSP-21375 SHARC processor • 1M × 8-bit flash memory • 8M × 16-bit (133 MHz) SDRAM • 2M bit SPI flash memory • AD1835 stereo, 96 kHz, 24-bit codec • USB-based debugger interface	ADZS-USB-ICE ADZS-HPUSB-ICE	VDSP-SHARC-PC-TEST VDSP-SHARC-PC-FULL VDSP-SHARC-PCFLOAT VDSP-SHARC-PCFLT-5	
ADSP-21467 ADSP-21469	ADZS-21469-EZBRD Key Features • ADSP-21469: 324-pin PBGA package, 25 MHz CLKIN oscillator • Flash memory: 4M × 8-bit, ST Micro M29W320EB • DDR2 memory: 64M × 16-bit, Micron MT47H64M16HR-3 • SPI flash: 16 Mb • Audio codec: AD1939 codec • S/PDIF: RCA phono jacks connected to DAI pin for input/output • Temperature sensor: ADM1032 • 2-wire sensor • UART: ADM3202 RS-232 line driver/receiver 5 V • Power supply: 5 V @ 3.6 A • LEDs: 11 LEDs: 1 power (green), 1 board reset (red), 8 general-purpose (amber), 1 temperature limit (amber) • Push buttons: 5 push buttons: 1 reset, 2 connected to DAI, 2 IRQ/flag • Expansion interface: EBIU, flags/IRQs, DAI, DPI, PWR_IN (5 V), 3.3 V, GND ADZS-21469-EZLITE ADZS-DBAGENT-BRD ADZS-SHAUDIO-EZEXT ADZS-BFSHUSB-EZEXT			

SHARC Processor Development Tools (continued)

Processor	Hardware	Emulator	Software	Additional Software Available
ADSP-21478 ADSP-21479	ADZS-21479-EZBRD <i>Key Features</i> - ADSP-21479: 196-pin CSP_BGA package, 16.625 MHz CLKIN oscillator - Flash memory: 4M × 8-bit, ST Micro M29W320EB - SDRAM memory: 16 Mb × 16-bit, Micron MT48LC16M16A2P - Asynch SRAM: 1M × 16-bit, ISSI IS61WV102416BLL-10TLI - SPI memory: 16 Mb - Analog audio: AD1939 codec - S/PDIF: RCA phone jacks - UART: ADM3202 RS-232 line driver/receiver - Power supply: 5 V @ 3.6 A - LEDs: 11 LEDs: 1 power (green), 1 board reset (red), 1 temperature limit (amber), and 8 general-purpose (amber) - Push buttons: (5) push buttons: (1) reset, (2) connected to DAI, (2) IRQ/Flag - SHARC expansion interface II: AMI, Flags/IRQs, DAI, DPI, PWR_IN, 3.3 V, GND ADZS-21479-EZLITE ADZS-DBAGENT-BRD	ADZS-USB-ICE ADZS-HPUSB-ICE	VDSP-SHARC-PC-TEST VDSP-SHARC-PC-FULL VDSP-SHARC-PCFLOAT VDSP-SHARC-PCFLT-5	
ADSP-21483 ADSP-21486 ADSP-21487 ADSP-21488 ADSP-21489	ADZS-21489-EZBRD <i>Key Features</i> - ADSP-21489: 176-pin LQFP package, 25 MHz CLKIN oscillator - Flash memory: 4M × 8-bit, ST Micro M29W320EB - SDRAM memory: 16 Mb × 16-bit, Micron MT48LC16M16A2P-6A - Asynch SRAM: 1M × 16-bit, ISSI IS61WV102416BLL-10TLI - SPI memory: 16 MB - Analog audio: AD1939 codec - S/PDIF: RCA phone jacks - Temperature sensor: ADM1032 2-wire sensor - UART: ADM3202 RS-232 line driver/receiver - Power supply: 5 V @ 3.6 A - LEDs: 11 LEDs: 1 power (green), 1 board reset (red), 1 temperature limit (amber), and 8 general purpose (amber) - Push buttons: (5) push buttons: (1) reset, (2) connected to DAI, (2) IRQ/Flag - SHARC expansion interface II: AMI, Flags/IRQs, DAI, DPI, PWR_IN, 3.3 V, GND ADZS-21489-EZLITE ADZS-DBAGENT-BRD			

SHARC Processor Product Portfolio

Higher Performance

	 ADSP-21261 ADSP-21262	 ADSP-21266	 ADSP-21362 ² ADSP-21363 ^{1,2} ADSP-21364 ^{1,2}	 ADSP-21371 ² ADSP-21375 ²	 ADSP-21368 ADSP-21369 ²	 ADSP-21365 ² ADSP-21366 ^{1,2} ADSP-21367	 ADSP-21478 ² ADSP-21479 ²	 ADSP-21483 ADSP-21487 ADSP-21488 ² ADSP-21489 ²	 ADSP-21467	 ADSP-21469 ²	 Future ²
Performance > 2 GFLOPS				•	•			•	•	•	•
Application-Specific Peripherals			•	•	•	•	•	•	•	•	•
Configurable Applications I/O interface			•	•	•	•	•	•	•	•	
Low Cost	•			•			•	•			
Audio Decoders in ROM		•				•			•		
Hardware Accelerators			•		•	•	•	•	•	•	•
High Speed Interprocessor Communication (Link Ports)									•	•	
Low Power							•				

¹ADSP-21363, 21364, and 21366 do not have hardware accelerators.²Automotive grade available.

Third-Party Developers

Many third parties provide software, hardware, and consulting services to support SHARC processors. For more information, visit www.analog.com/processors/collaborative.

Hardware

- Companion chip/chipsets
- Development boards
- Development systems
- Emulators
- Evaluation/starter boards
- Reference designs
- COTS DSP boards
- Daughter boards

Software

- Audio (MP3, AAC/AAC+, WMA9, Dolby,® DTS,® etc.)
- Algorithms
- Code generation
- Tool suites
- Filter programs
- Graphical software programs
- Post analysis tools
- System integration
- System prototyping/simulation

Complimentary Support Resources

EngineerZone

EZ.analog.com

SHARC Visual Learning and Development

www.analog.com/vld

Analog Devices Sales and Distributors

www.analog.com/salesdir

Processor and Development Tools

Technical Support

www.analog.com/processors/technicalsupport

North America and Asia

processor.support@analog.com

Europe

processor.europe@analog.com

Follow Us On



www.twitter.com/adisharc



Network with our LinkedIn Group: Analog Devices SHARC

www.linkedin.com

Companion Power Selection Guide for SHARC Processors

ADI power management products provide optimized power for SHARC products—whether it’s a single processor or multiple processors, in hand-held or high power applications, ADI has a solution to meet your needs.

How to Use This Guide

Determine the peak current requirement for each rail of your processor by referring to the relevant data sheets and engineer-to-engineer notes. Then, use this companion guide to select a power solution that offers the required V_{out} for that rail.


The ADIsimPower™ design tool offers a complete set of features to create a complete BOM for all of these solutions. Visit analog.com/ADIsimPower.

Companion Power Selection Guide for SHARC Processors																											
ADI power management products provide optimized power for SHARC products—whether it’s a single processor or multiple processors, in hand-held or high power applications, ADI has a solution to meet your needs.																											
How to Use This Guide																											
Determine the peak current requirement for each rail of your processor by referring to the relevant data sheets and engineer-to-engineer notes. Then, use this companion guide to select a power solution that offers the required V_{out} for that rail.																											
The ADIsimPower™ design tool offers a complete set of features to create a complete BOM for all of these solutions. Visit analog.com/ADIsimPower .																											
Other Domains ²	SHARC Processors	Speed (MHz)	Nominal Values (V)			Max Current (mA)		Linear Regulators										Switching Regulators							SC ¹		
			VDD _{ext}	VDD_PLL/ANALOG	10	3.3	—	Part Number	ADP121	ADP170	ADP220	ADP1706	ADP1707	ADP1715	ADP1720	ADP1740	ADP1752	ADP1754	ADP2102	ADP2105	ADP2106	ADP2107	ADP2108	ADP2114		ADP2504	ADP5020
VDD _{int} Domain	ADSP-21261/ADSP-21262/ADSP-21266	150	1.14	1.26	<500	1260	Max (A)	150 mA	300 mA	2 outputs: 200 mA, 200 mA	1	1	500 mA	50 mA	2	800 mA	1.2	600 mA	1	1.5	2	600 mA	2/2, 1/3, or 4 single	1	3 outputs: 250 mA, 600 mA, 150 mA	20	5
	ADSP-21362/ADSP-21364/ADSP-21365/ADSP-21366	200	1.14	1.26	500	1260																					
		333	1.14	1.26	<800	1150																					
		266	1.14	1.26	700	1600																					
	ADSP-21367/ADSP-21368/ADSP-21369	333	1.14	1.35	900	3025																					
		350	1.14	1.365	1050	1900																					
		400	1.14	1.35	1100	3100																					
	ADSP-21371/ADSP-21375	266	1.14	1.26	600	1200																					

¹SC = switching controllers ²Refer to the relevant data sheet and engineer-to-engineer note to determine the exact "other domain" requirements of each individual processor.
Many applications power more than one device or domain using a single regulator. Compute and add the maximum current draw for each device and domain in a particular application before choosing a regulator.

The regulators marked in this guide support the current draw at the maximum specified frequency, voltage, and industrial temperature. Regulators not marked as compatible with a particular processor may still be appropriate depending on the frequency, voltage, temperature, and application code used.

Example* Power Solution for SHARC Processors

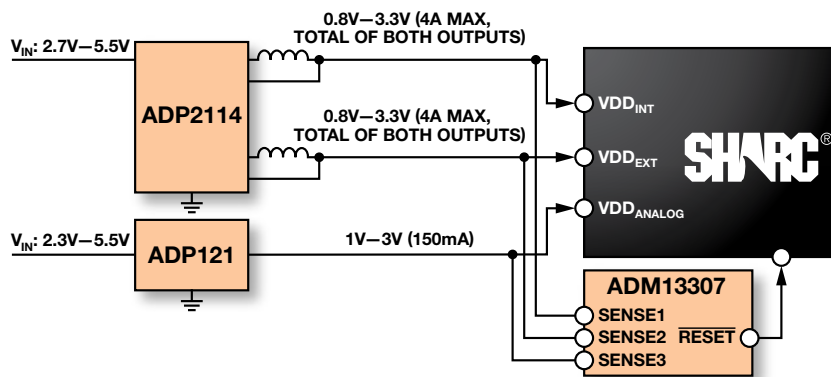

*Numerous variables affect the power requirements of an embedded system. Ambient temperature, core and system frequency, supply voltages, pin capacitances, power modes, application code, and peripheral utilization all contribute to the average power requirements; therefore, this is just one suggested solution.

**Analog Devices, Inc.
Worldwide Headquarters**

Analog Devices, Inc.
One Technology Way
P.O. Box 9106
Norwood, MA 02062-9106
U.S.A.
Tel: 781.329.4700
(800.262.5643,
U.S.A. only)
Fax: 781.461.3113

**Analog Devices, Inc.
Europe Headquarters**

Analog Devices, Inc.
Wilhelm-Wagenfeld-Str. 6
80807 Munich
Germany
Tel: 49.89.76903.0
Fax: 49.89.76903.157

**Analog Devices, Inc.
Japan Headquarters**

Analog Devices, KK
New Pier Takeshiba
South Tower Building
1-16-1 Kaigan, Minato-ku,
Tokyo, 105-6891
Japan
Tel: 813.5402.8200
Fax: 813.5402.1064

**Analog Devices, Inc.
Southeast Asia
Headquarters**

Analog Devices
22/F One Corporate Avenue
222 Hu Bin Road
Shanghai, 200021
China
Tel: 86.21.2320.8000
Fax: 86.21.2320.8222