



Features

- 1210 size
- High Q characteristic
- High current rating
- RoHS compliant*

Applications

- Prevention of electromagnetic interference to signals on the secondary side of electronic equipment

CMH322522 Series - Wirewound Chip Inductor

Electrical Specifications

Bourns Part No.	Inductance		Q Min.	Test Freq. MHz L/Q	SRF MHz Min.	DCR Ω Max.	I _{rms} mA Max.
	μ H	Tol. %					
CMH322522-R10ML	0.10	± 20	28	25.2	700	0.44	450
CMH322522-R12ML	0.12	± 20	30	25.2	500	0.22	450
CMH322522-R15ML	0.15	± 20	30	25.2	450	0.25	450
CMH322522-R18ML	0.18	± 20	30	25.2	400	0.25	450
CMH322522-R22ML	0.22	± 20	30	25.2	350	0.32	450
CMH322522-R27ML	0.27	± 20	30	25.2	320	0.36	450
CMH322522-R33ML	0.33	± 20	30	25.2	300	0.40	450
CMH322522-R39ML	0.39	± 20	30	25.2	250	0.45	450
CMH322522-R47ML	0.47	± 20	30	25.2	220	0.50	450
CMH322522-R56ML	0.56	± 20	30	25.2	180	0.55	450
CMH322522-R68ML	0.68	± 20	30	25.2	160	0.60	450
CMH322522-R82ML	0.82	± 20	30	25.2	140	0.65	450
CMH322522-1R0KL	1.0	± 10	30	7.96	120	0.70	400
CMH322522-1R2KL	1.2	± 10	30	7.96	100	0.75	390
CMH322522-1R5KL	1.5	± 10	30	7.96	85	0.85	370
CMH322522-1R8KL	1.8	± 10	30	7.96	80	0.90	350
CMH322522-2R2KL	2.2	± 10	30	7.96	75	1.0	320
CMH322522-2R7KL	2.7	± 10	30	7.96	70	1.1	290
CMH322522-3R3KL	3.3	± 10	30	7.96	55	1.2	260
CMH322522-3R9KL	3.9	± 10	30	7.96	50	1.3	250
CMH322522-4R7KL	4.7	± 10	30	7.96	45	1.5	220
CMH322522-5R6KL	5.6	± 10	30	7.96	40	1.6	200
CMH322522-6R8KL	6.8	± 10	30	7.96	35	1.8	180
CMH322522-8R2KL	8.2	± 10	30	7.96	30	2.0	170
CMH322522-100KL	10	± 10	30	2.52	28	2.1	150
CMH322522-120KL	12	± 10	30	2.52	20	2.5	140
CMH322522-150KL	15	± 10	30	2.52	20	2.8	130
CMH322522-180KL	18	± 10	30	2.52	20	3.3	120
CMH322522-220KL	22	± 10	30	2.52	19	3.7	110
CMH322522-270KL	27	± 10	30	2.52	18	5.0	80
CMH322522-330KL	33	± 10	30	2.52	16	5.6	70
CMH322522-390KL	39	± 10	30	2.52	15	6.4	65
CMH322522-470KL	47	± 10	30	2.52	13	7.0	60
CMH322522-560KL	56	± 10	30	2.52	12	8.0	55
CMH322522-680KL	68	± 10	30	2.52	11	9.0	50
CMH322522-820KL	82	± 10	30	2.52	10	10	45
CMH322522-101KL	100	± 10	20	0.796	9	10	40


General Specifications

Temperature Rise 20 °C max. at rated current
 Operating Temperature -55 °C to +125 °C
 Storage Temperature -55 °C to +125 °C
 Reflow Soldering .. 230 °C, 50 sec. max.
 Resistance to Soldering Heat 260 °C, 5 seconds


Materials

Core Ferrite
 Terminal Electrode Cu/Sn
 Packaging 2,000 pcs. per reel

Product Dimensions

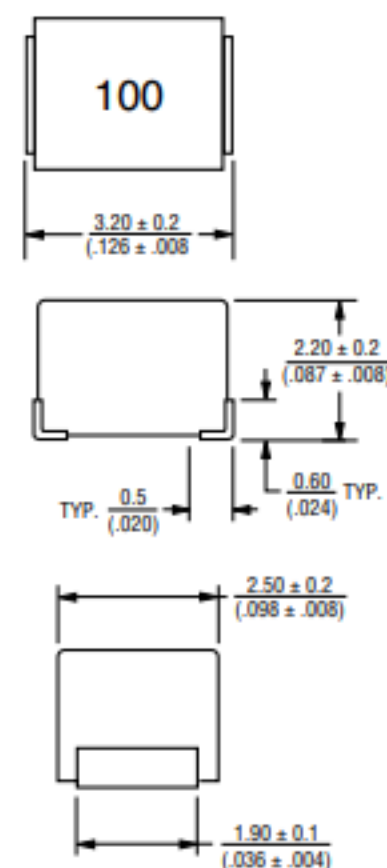

Recommended Layout

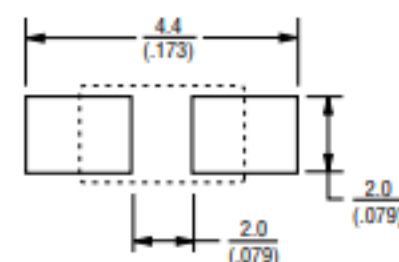

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$



WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legaldisclaimer.pdf