

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                                                                         | Characteristic Values |      |                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|-------------------------|
|              |                                                                                                                                                     | Min.                  | Typ. | Max                     |
| $g_{fs}$     | $V_{DS} = 20\text{V}$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1                                                                                          | 0.8                   | 1.3  | S                       |
| $C_{iss}$    | $V_{GS} = 0\text{V}$ , $V_{DS} = 25\text{V}$ , $f = 1\text{MHz}$                                                                                    |                       | 666  | pF                      |
| $C_{oss}$    |                                                                                                                                                     |                       | 36   | pF                      |
| $C_{rss}$    |                                                                                                                                                     |                       | 7.6  | pF                      |
| $Q_{g(on)}$  | $V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$                                                                    |                       | 24.8 | nC                      |
| $Q_{gs}$     |                                                                                                                                                     |                       | 4.4  | nC                      |
| $Q_{gd}$     |                                                                                                                                                     |                       | 12.8 | nC                      |
| $t_{d(on)}$  | <b>Resistive Switching Times</b><br>$V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$<br>$R_G = 25\Omega$ (External) |                       | 25   | ns                      |
| $t_r$        |                                                                                                                                                     |                       | 27   | ns                      |
| $t_{d(off)}$ |                                                                                                                                                     |                       | 78   | ns                      |
| $t_f$        |                                                                                                                                                     |                       | 29   | ns                      |
| $R_{thJC}$   | TO-220                                                                                                                                              |                       |      | 1.45 $^\circ\text{C/W}$ |
| $R_{thCS}$   |                                                                                                                                                     | 0.50                  |      | $^\circ\text{C/W}$      |

#### Source-Drain Diode

| Symbol   | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)    | Characteristic Values |      |       |
|----------|--------------------------------------------------------------------------------|-----------------------|------|-------|
|          |                                                                                | Min.                  | Typ. | Max   |
| $I_S$    | $V_{GS} = 0\text{V}$                                                           |                       |      | 1.4 A |
| $I_{SM}$ | Repetitive, Pulse Width Limited by $T_{JM}$                                    |                       |      | 4.2 A |
| $V_{SD}$ | $I_F = I_S$ , $V_{GS} = 0\text{V}$ , Note 1                                    |                       |      | 1.5 V |
| $t_{rr}$ | $I_F = 1.4\text{A}$ , $-di/dt = 100\text{A}/\mu\text{s}$ , $V_R = 100\text{V}$ |                       | 900  | ns    |

- Notes: 1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .  
2. On through-hole packages,  $R_{DS(on)}$  Kelvin test contact location must be 5mm or less from the package body.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |             |             |             |             |             |             |
|-----------|-----------|-----------|-----------|-------------|-------------|-------------|-------------|-------------|-------------|
| 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665   | 6,404,065B1 | 6,683,344   | 6,727,585   | 7,005,734B2 | 7,157,338B2 |
| 4,860,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123B1 | 6,534,343   | 6,710,405B2 | 6,759,692   | 7,063,975B2 |             |
| 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728B1 | 6,583,505   | 6,710,463   | 6,771,478B2 | 7,071,537   |             |

Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$

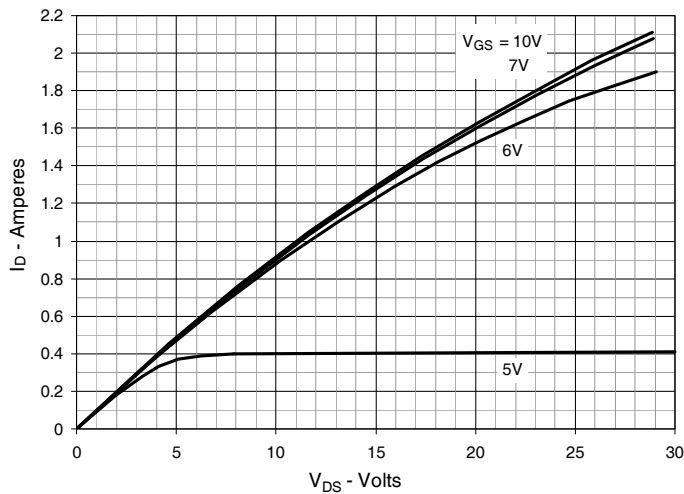


Fig. 2. Output Characteristics @  $T_J = 125^\circ\text{C}$

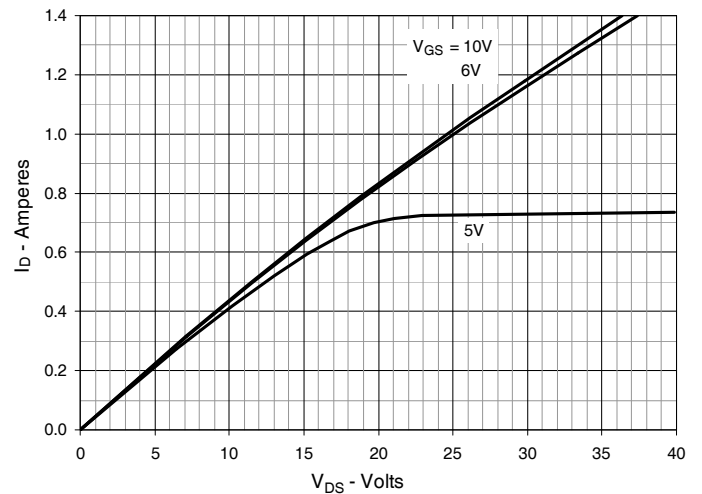


Fig. 3.  $R_{DS(on)}$  Normalized to  $I_D = 0.7\text{A}$  Value vs. Junction Temperature

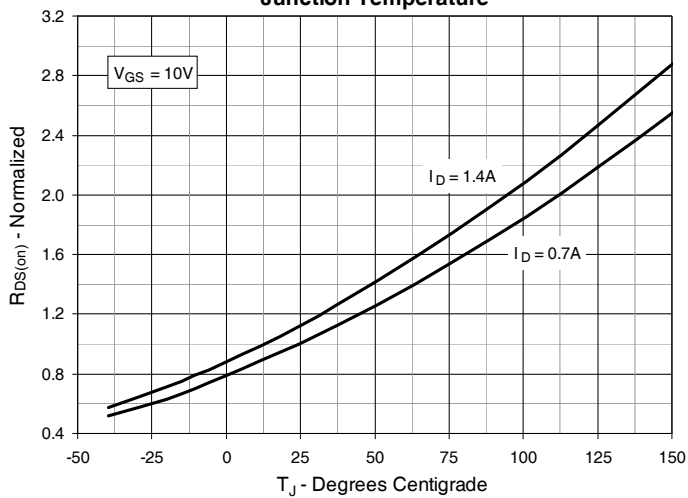


Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 0.7\text{A}$  Value vs. Drain Current

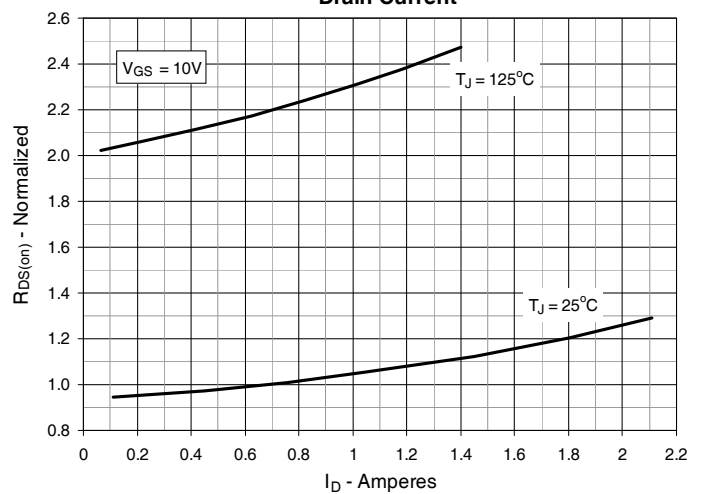


Fig. 5. Maximum Drain Current vs. Case Temperature

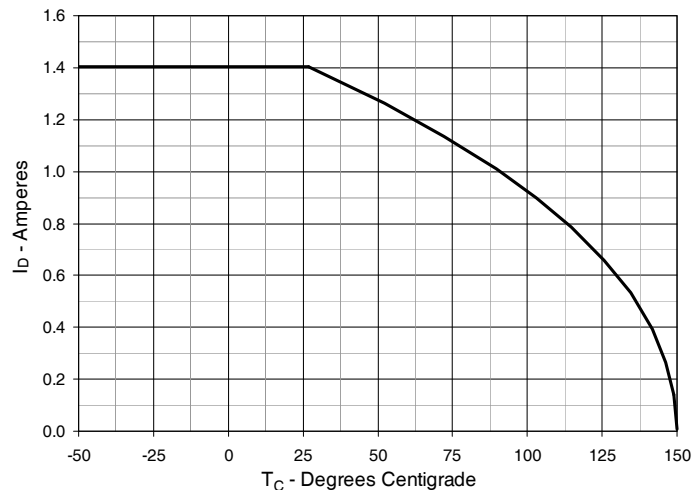


Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature

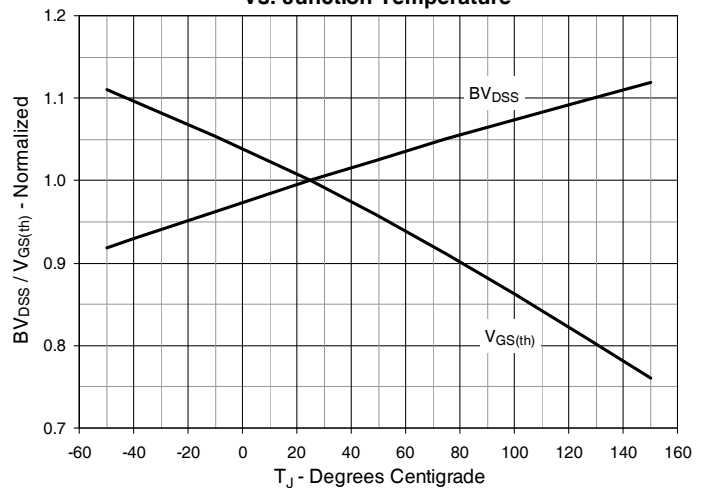


Fig. 7. Input Admittance

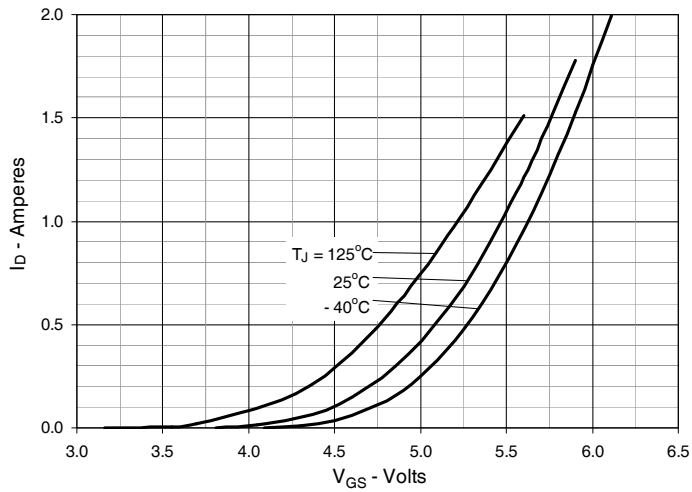


Fig. 8. Transconductance

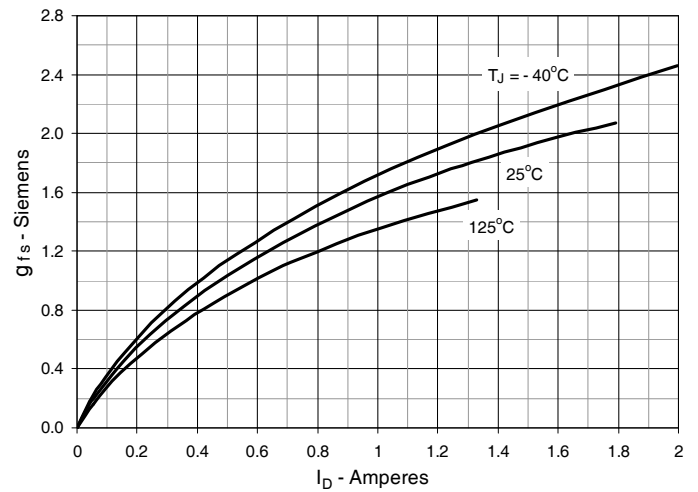


Fig. 9. Forward Voltage Drop of Intrinsic Diode

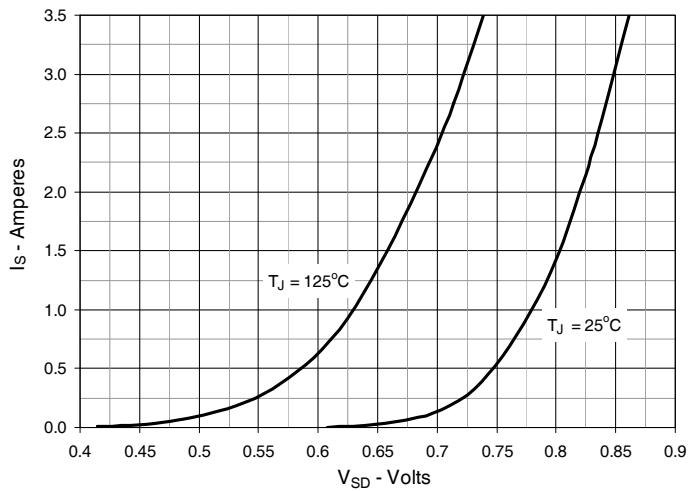


Fig. 10. Gate Charge

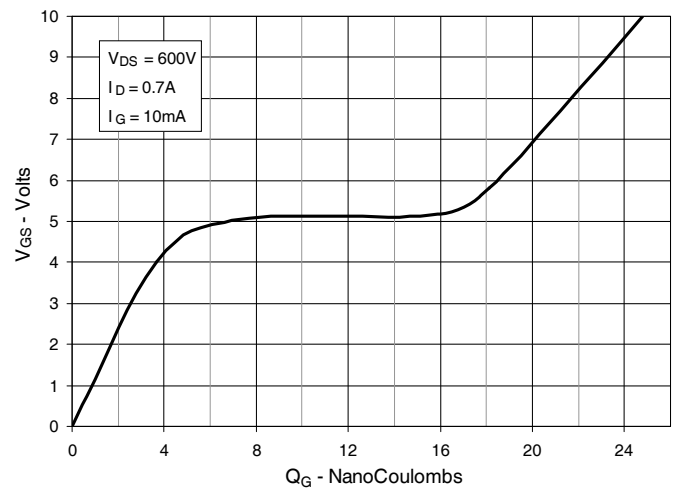


Fig. 11. Capacitance



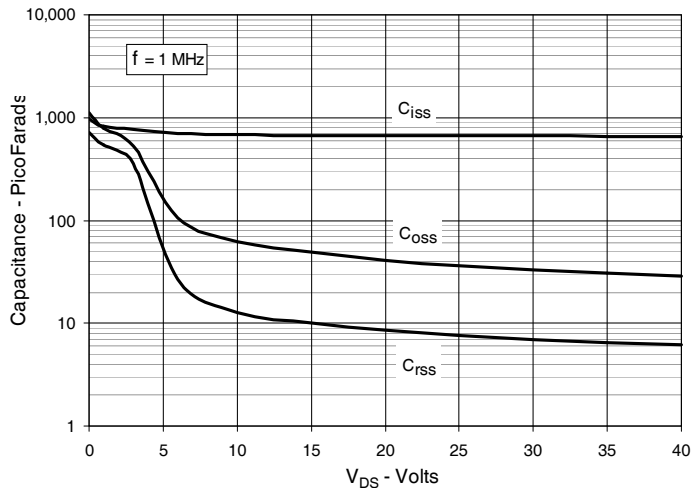


Fig. 12. Maximum Transient Thermal Impedance

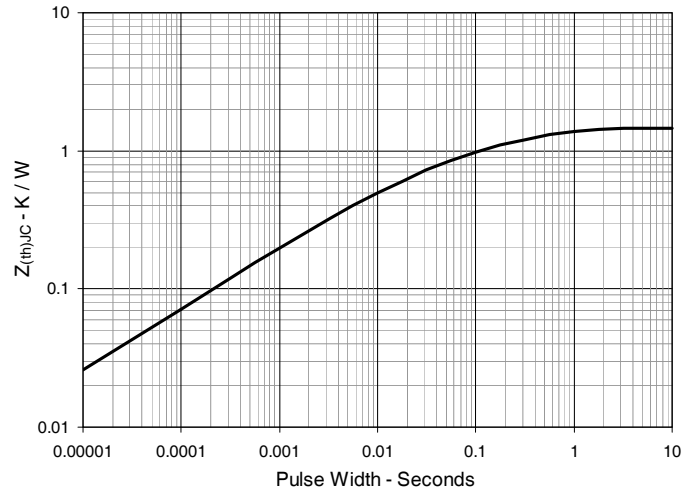


### TO-252 AA Outline

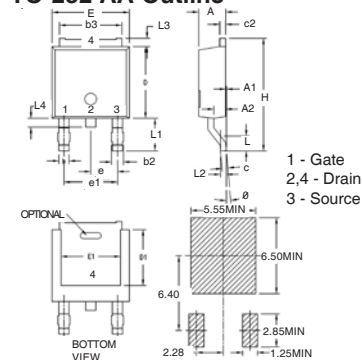


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .086     | .094 | 2.19        | 2.38  |
| A1  | 0        | .005 | 0           | 0.12  |
| A2  | .038     | .046 | 0.97        | 1.17  |
| b   | .025     | .035 | 0.64        | 0.89  |
| b2  | .030     | .045 | 0.76        | 1.14  |
| b3  | .200     | .215 | 5.08        | 5.46  |
| c   | .018     | .024 | 0.46        | 0.61  |
| c2  | .018     | .023 | 0.46        | 0.58  |
| D   | .235     | .245 | 5.97        | 6.22  |
| D1  | .180     | .205 | 4.57        | 5.21  |
| E   | .250     | .265 | 6.35        | 6.73  |
| E1  | .170     | .205 | 4.32        | 5.21  |
| e   | .090 BSC |      | 2.28 BSC    |       |
| e1  | .180 BSC |      | 4.57 BSC    |       |
| H   | .370     | .410 | 9.40        | 10.42 |
| L   | .055     | .070 | 1.40        | 1.78  |
| L1  | .100     | .115 | 2.54        | 2.92  |
| L2  | .020 BSC |      | 0.50 BSC    |       |
| L3  | .025     | .040 | 0.64        | 1.02  |
| L4  | .025     | .040 | 0.64        | 1.02  |
| θ   | 0°       | 10°  | 0°          | 10°   |

### TO-263 Outline

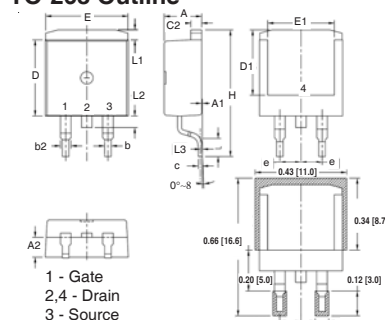


| SYM  | INCHES   |      | MILLIMETERS |       |
|------|----------|------|-------------|-------|
|      | MIN      | MAX  | MIN         | MAX   |
| A    | .170     | .185 | 4.30        | 4.70  |
| A1   | .000     | .008 | 0.00        | 0.20  |
| A2   | .091     | .098 | 2.30        | 2.50  |
| b    | .028     | .035 | 0.70        | 0.90  |
| b2   | .046     | .060 | 1.18        | 1.52  |
| C    | .018     | .024 | 0.45        | 0.60  |
| C2   | .049     | .060 | 1.25        | 1.52  |
| D    | .340     | .370 | 8.63        | 9.40  |
| D1   | .300     | .327 | 7.62        | 8.30  |
| E    | .380     | .410 | 9.65        | 10.41 |
| E1   | .270     | .330 | 6.86        | 8.38  |
| [e]  | .100 BSC |      | 2.54 BSC    |       |
| H    | .580     | .620 | 14.73       | 15.75 |
| L    | .075     | .105 | 1.91        | 2.67  |
| L1   | .039     | .060 | 1.00        | 1.52  |
| L2   | —        | .070 | —           | 1.77  |
| [L3] | .010 BSC |      | 0.254 BSC   |       |

### TO-220 Outline

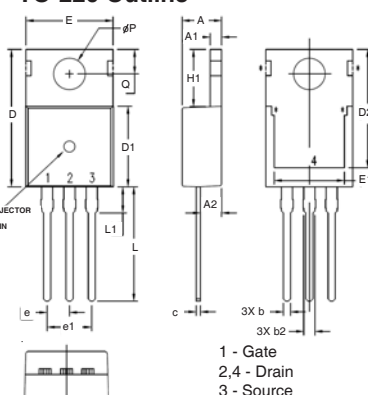

| SYM  | INCHES   |      | MILLIMETERS |       |
|------|----------|------|-------------|-------|
|      | MIN      | MAX  | MIN         | MAX   |
| A    | .169     | .185 | 4.30        | 4.70  |
| A1   | .047     | .055 | 1.20        | 1.40  |
| A2   | .079     | .106 | 2.00        | 2.70  |
| b    | .024     | .039 | 0.60        | 1.00  |
| b2   | .045     | .057 | 1.15        | 1.45  |
| c    | .014     | .026 | 0.35        | 0.65  |
| D    | .587     | .626 | 14.90       | 15.90 |
| D1   | .335     | .370 | 8.50        | 9.40  |
| (D2) | .500     | .531 | 12.70       | 13.50 |
| E    | .382     | .406 | 9.70        | 10.30 |
| (E1) | .283     | .323 | 7.20        | 8.20  |
| e    | .100 BSC |      | 2.54 BSC    |       |
| e1   | .200 BSC |      | 5.08 BSC    |       |
| H1   | .244     | .268 | 6.20        | 6.80  |
| L    | .492     | .547 | 12.50       | 13.90 |
| L1   | .110     | .154 | 2.80        | 3.90  |
| ØP   | .134     | .150 | 3.40        | 3.80  |
| Q    | .106     | .126 | 2.70        | 3.20  |

### TO-252HV Outline

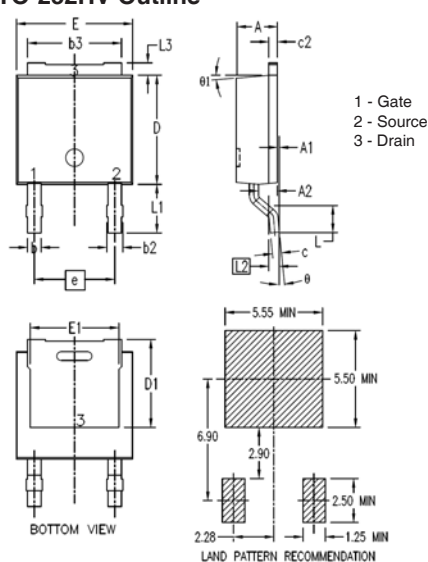

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .086     | .094 | 2.18        | 2.39  |
| A1  | 0        | .005 | 0           | 0.13  |
| A2  | .038     | .046 | 0.97        | 1.17  |
| b   | .025     | .035 | 0.64        | 0.89  |
| b2  | .030     | .045 | 0.76        | 1.14  |
| b3  | .200     | .220 | 5.08        | 5.59  |
| c   | .018     | .024 | 0.46        | 0.61  |
| c2  | .018     | .023 | 0.46        | 0.58  |
| D   | .235     | .245 | 5.97        | 6.22  |
| D1  | .180     | .205 | 4.57        | 5.21  |
| E   | .250     | .265 | 6.35        | 6.73  |
| E1  | .170     | .205 | 4.32        | 5.21  |
| e   | .180 BSC |      | 4.57 BSC    |       |
| H   | .370     | .410 | 9.40        | 10.41 |
| L   | .055     | .070 | 1.40        | 1.78  |
| L1  | .100     | .115 | 2.54        | 2.92  |
| L2  | .020 BSC |      | 0.50 BSC    |       |
| L3  | .025     | .040 | 0.64        | 1.02  |
| θ   | 0°       | 10°  | 0°          | 10°   |
| θ1  | 0°       | 10°  | 0°          | 10°   |



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).