

Selection Guide

Part No.	Dice	Lens Type	I _v (mcd) @ 20 mA		Viewing Angle
			Min.	Max.	2 θ 1/2
KA-3528IT	HIGH EFFICIENCY RED (GaAsP/GaP)	RED TRANSPARENT	12.5	40	120°
KA-3528EC	HIGH EFFICIENCY RED (GaAsP/GaP)	WATER CLEAR	12.5	40	120°
KA-3528YT	YELLOW (GaAsP/GaP)	YELLOW TRANS.	8	20	120°
KA-3528YC	YELLOW (GaAsP/GaP)	WATER CLEAR	8	20	120°
KA-3528SRT	SUPER BRIGHT RED (GaAlAs)	RED TRANSPARENT	80	120	120°
KA-3528SRC	SUPER BRIGHT RED (GaAlAs)	WATER CLEAR	80	120	120°
KA-3528SGT	SUPER BRIGHT GREEN (GaP)	GREEN TRANSPARENT	12.5	40	120°
KA-3528SGC	SUPER BRIGHT GREEN (GaP)	WATER CLEAR	12.5	40	120°
KAA-3528ESGC	HIGH EFFICIENCY RED (GaAsP/GaP)	WATER CLEAR	12.5	40	120°
	SUPER BRIGHT GREEN (GaP)		12.5	40	
KAA-3528EMBSGC	HIGH EFFICIENCY RED (GaAsP/GaP)	WATER CLEAR	12.5	40	120°
	SUPER BRIGHT GREEN (GaP)		12.5	40	
	BLUE (GaN)		2	8	

Notes:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	High Efficiency Red Yellow Super Bright Red Super Bright Green Blue	625 590 660 565 430		nm	IF=20mA
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	High Efficiency Red Yellow Super Bright Red Super Bright Green Blue	45 35 20 30 65		nm	IF=20mA
C	Capacitance	High Efficiency Red Yellow Super Bright Red Super Bright Green Blue	12 10 95 45 100		pF	VF=0V;f=1MHz
V _F	Forward Voltage	High Efficiency Red Yellow Super Bright Red Super Bright Green Blue	2.0 2.1 1.85 2.2 4.5	2.5 2.5 2.5 2.5 5.5	V	IF=20mA
I _R	Reverse Current	All	10		uA	VR = 5V

Absolute Maximum Ratings at $T_A=25^\circ\text{C}$


Parameter	High Efficiency Red	Yellow	Super Bright Red	Super Bright Green	Blue	Units
Power dissipation	105	105	100	105	105	mW
DC Forward Current	30	30	30	25	30	mA
Peak Forward Current [1]	150	150	150	150	200	mA
Reverse Voltage	5	5	5	5	5	V
Operating/Storage Temperature	-40°C To $+85^\circ\text{C}$					

Note:


1. 1/10 Duty Cycle, 0.1ms Pulse Width .

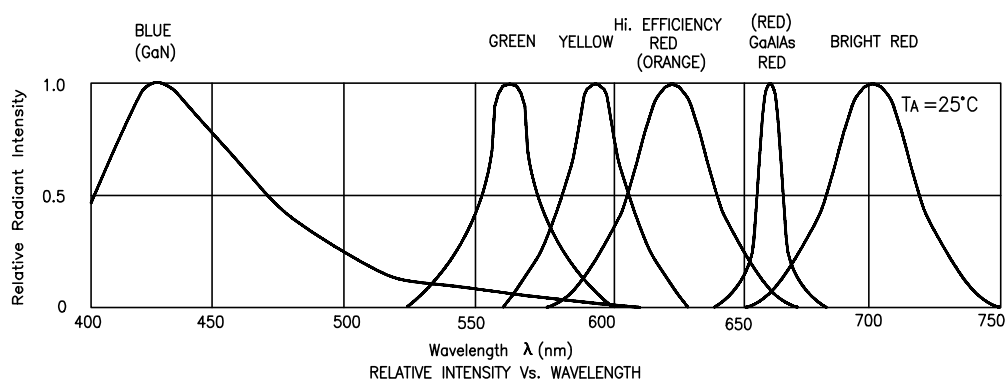


High Efficiency Red KA-3528EC, KA-3528IT

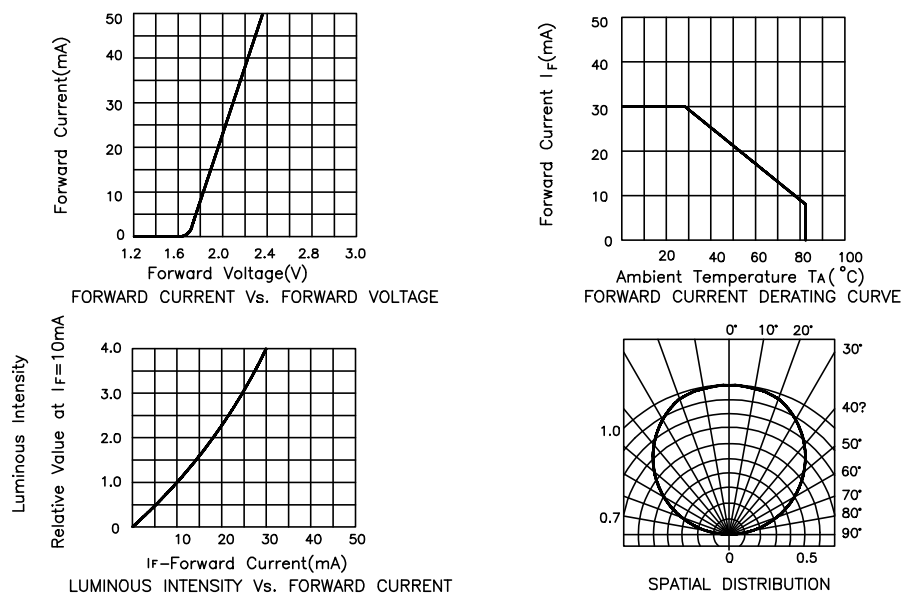


Yellow KA-3528YC , KA-3528YT




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

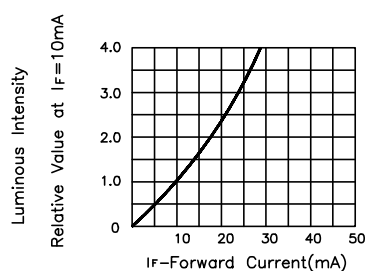


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Super Bright Red KA-3528SRC , KA-3528SRT




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE




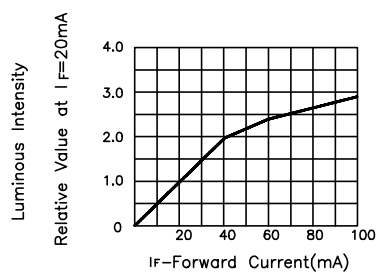


LUMINOUS INTENSITY Vs. FORWARD CURRENT







SPATIAL DISTRIBUTION

Super Bright Green KA-3528SGC, KA-3528SGT

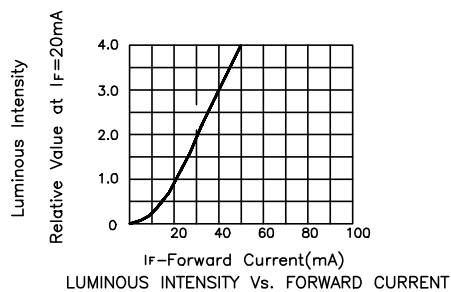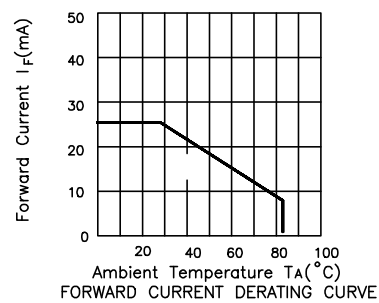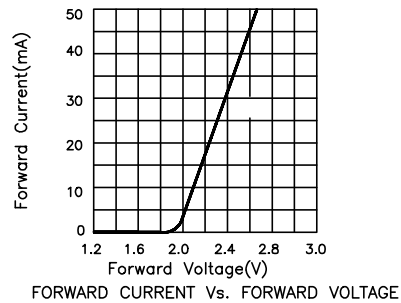


High Efficiency Red / Super Bright Green KAA-3528ESGC

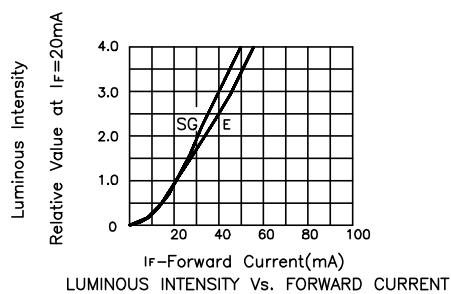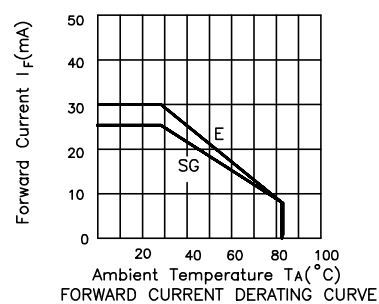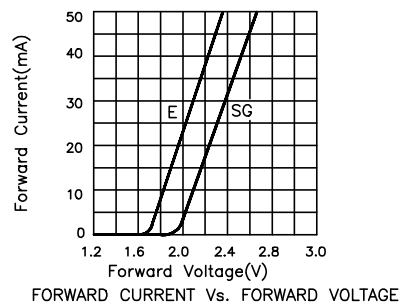


KAA-3528EMBSGC


High Efficiency Red / Super Bright Green




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

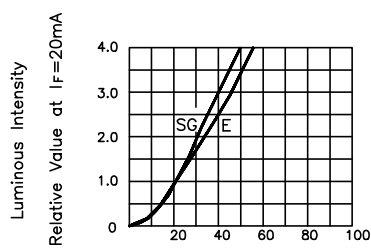


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Blue




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE




RELATIVE INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


KA-3528 , KAA-3528 Series SMT Reflow Soldering Instructions

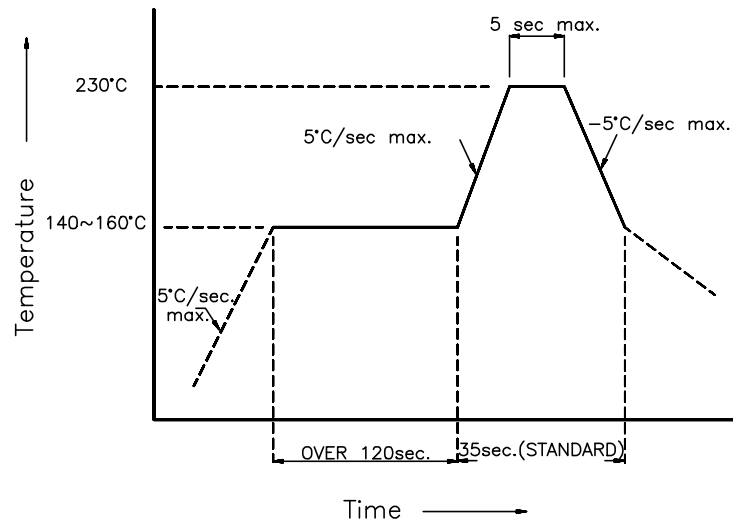

KA-3528 , KAA-3528 Series Recommended Soldering Pattern (Units : mm)

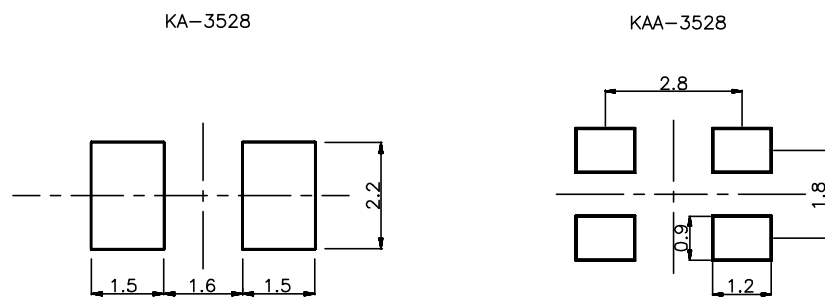

KA-3528 , KAA-3528 Series Tape Specifications (Units : mm)

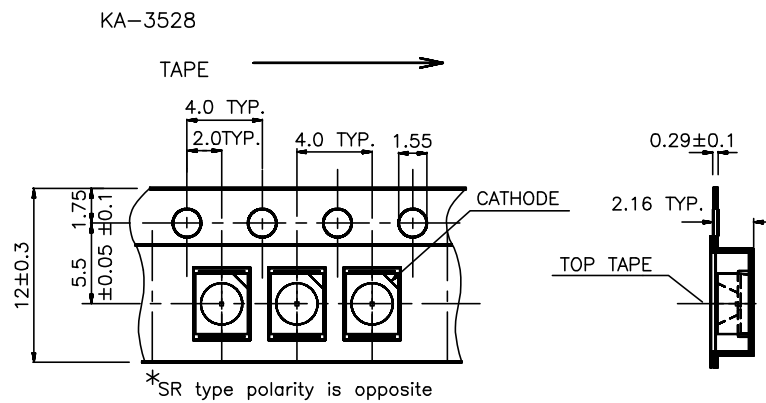

KAA-3528ESGC
KAA-3528EMBSC

