


ABRIDGED DATA SHEET

MAX14740–MAX14742/
MAX20320

Smart, Compact, 6A, Power-Path
Selector with Reset Control

Typical Application Circuits (continued)

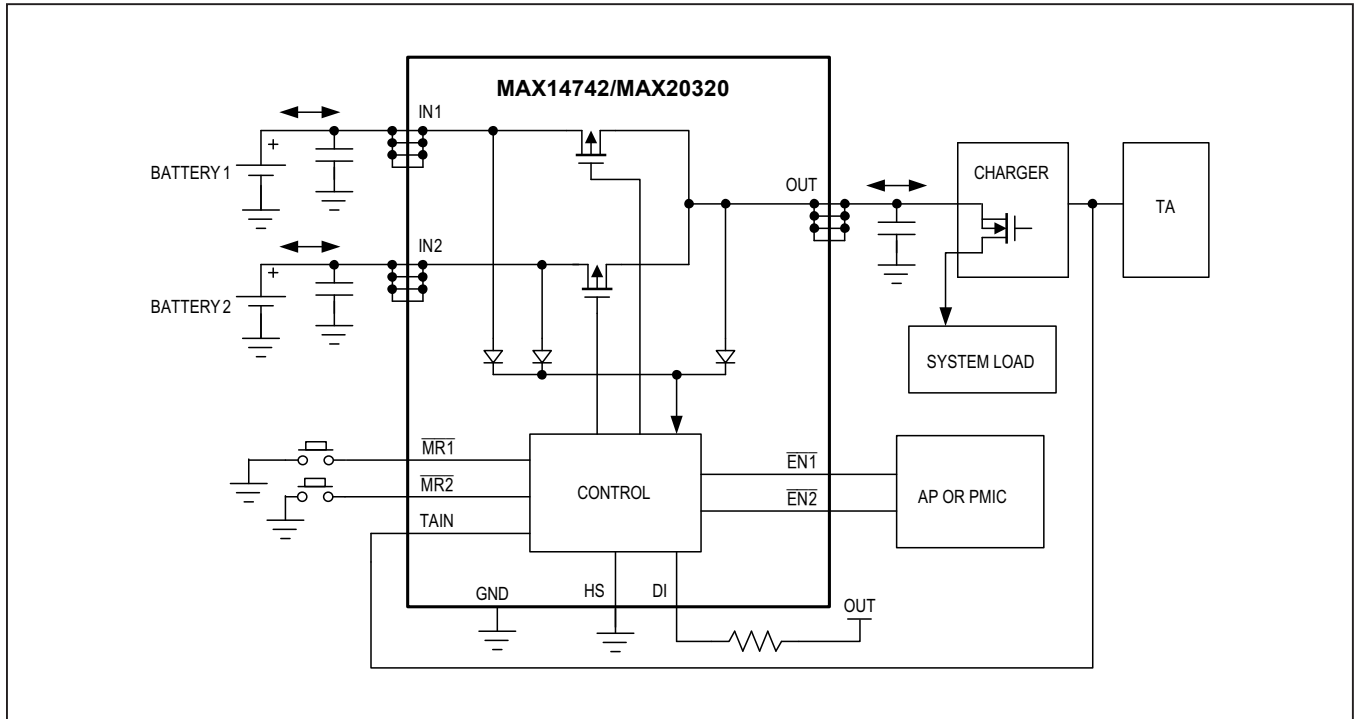

Ordering Information/Selector Guide

PART	COMMUNICATION	COMPARATOR THRESHOLD	OUT DISCHARGE ENABLE	t_{DB}	PIN-PACKAGE
MAX14740EWP+T	I ² C	PROGRAMMABLE	PROGRAMMABLE	PROGRAMMABLE	20 WLP
MAX14741EWP+T	GPIO	300mV/500mV	NO	2.5 sec	20 WLP
MAX14742EWP+T	GPIO	200mV/400mV	YES	2.5 sec	20 WLP
MAX20320EWP+T	GPIO	200mV/400mV	YES	1 sec	20 WLP

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
20 WLP	W201G2+1	21-100016	Refer to Application Note 1891