

## RATING

### 1. Coil data

#### 1) PA type

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F)            | Drop-out voltage (at 20°C 68°F)          | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. allowable voltage (at 20°C 68°F) |
|----------------------|-------------------------------------------|------------------------------------------|-------------------------------------------------|---------------------------------------|-------------------------|---------------------------------------|
| 5V DC                | 70%V or less of nominal voltage (Initial) | 5%V or more of nominal voltage (Initial) | 24.0mA                                          | 208Ω                                  | 120mW                   | 120%V of nominal voltage              |
| 6V DC                |                                           |                                          | 20.0mA                                          | 300Ω                                  |                         |                                       |
| 9V DC                |                                           |                                          | 13.3mA                                          | 675Ω                                  |                         |                                       |
| 12V DC               |                                           |                                          | 10.0mA                                          | 1,200Ω                                |                         |                                       |
| 18V DC               |                                           |                                          | 6.7mA                                           | 2,700Ω                                |                         |                                       |
| 24V DC               |                                           |                                          | 7.5mA                                           | 3,200Ω                                | 180mW                   |                                       |
| 24V DC               |                                           |                                          | 5.0mA                                           | 4,800Ω                                | 120mW                   |                                       |

#### 2) PAD type

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F)            | Drop-out voltage (at 20°C 68°F)          | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. allowable voltage (at 20°C 68°F) |
|----------------------|-------------------------------------------|------------------------------------------|-------------------------------------------------|---------------------------------------|-------------------------|---------------------------------------|
| 5V DC                | 70%V or less of nominal voltage (Initial) | 5%V or more of nominal voltage (Initial) | 36.0mA                                          | 139Ω                                  | 180mW                   | 120%V of nominal voltage              |
| 12V DC               |                                           |                                          | 15.0mA                                          | 800Ω                                  |                         |                                       |
| 18V DC               |                                           |                                          | 10.0mA                                          | 1,800Ω                                |                         |                                       |
| 24V DC               |                                           |                                          | 7.5mA                                           | 3,200Ω                                |                         |                                       |

## 2. Specifications

| Characteristics            | Item                                                         |                                        | Specifications                                                                                                                 |                                             |
|----------------------------|--------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
|                            |                                                              |                                        | PA type                                                                                                                        | PAD type                                    |
| Contact                    | Arrangement                                                  |                                        | 1 Form A                                                                                                                       |                                             |
|                            | Initial contact resistance, max.                             |                                        | Max. 30 mΩ (By voltage drop 6 V DC 1A)                                                                                         |                                             |
|                            | Contact material                                             |                                        | Au-clad AgNi type                                                                                                              |                                             |
| Rating                     | Nominal switching capacity (resistive load)                  |                                        | 5 A 250 V AC, 5 A 30 V DC                                                                                                      | 3 A 250 V AC, 3 A 30 V DC                   |
|                            | Max. switching power (resistive load)                        |                                        | 1,250 VA, 150 W                                                                                                                | 750 VA, 90 W                                |
|                            | Max. switching voltage                                       |                                        | 250 V (AC), 110 V (DC)                                                                                                         |                                             |
|                            | Max. switching current                                       |                                        | 5 A                                                                                                                            | 3 A                                         |
|                            | Nominal operating power                                      |                                        | 120 mW (5 to 24 V DC), 180 mW (24 V DC)                                                                                        | 180 mW                                      |
|                            | Min. switching capacity (Reference value) <sup>1</sup>       |                                        | 100μA 100mV DC                                                                                                                 |                                             |
| Electrical characteristics | Insulation resistance (Initial)                              |                                        | Min. 1,000MΩ (at 500V DC)<br>Measurement at same location as "Initial breakdown voltage" section.                              |                                             |
|                            | Breakdown voltage (Initial)                                  | Between open contacts                  | 1,000 Vrms for 1min. (Detection current: 10mA.)                                                                                |                                             |
|                            |                                                              | Between contact and coil               | 2,000 Vrms for 1min. (Detection current: 10mA.)                                                                                |                                             |
|                            | Surge breakdown voltage (Initial)                            | Between contacts and coil <sup>2</sup> | 4,000 V                                                                                                                        |                                             |
|                            | Temperature rise (at 20°C 68°F)                              |                                        | Max. 45°C<br>(By resistive method, nominal voltage applied to the coil, nominal switching capacity.)                           |                                             |
|                            | Operate time (at nominal voltage) (at 20°C 68°F)             |                                        | Max. 10 ms                                                                                                                     |                                             |
|                            | Release time (at nominal voltage) (at 20°C 68°F)             |                                        | Max. 5 ms                                                                                                                      |                                             |
| Mechanical characteristics | Shock resistance                                             | Functional                             | Min. 147 m/s <sup>2</sup> (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)                                         |                                             |
|                            |                                                              | Destructive                            | Min. 980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)                                                                |                                             |
|                            | Vibration resistance                                         | Functional                             | 10 to 55 Hz at double amplitude of 2.5 mm (Detection time: 10μs.)                                                              |                                             |
|                            |                                                              | Destructive                            | 10 to 55 Hz at double amplitude of 3.5 mm                                                                                      |                                             |
| Expected life              | Mechanical                                                   |                                        | Min. 2×10 <sup>7</sup> (at 180 times/min.)                                                                                     |                                             |
|                            | Electrical                                                   | 3 A 250 V AC, 30 V DC                  | Min. 1×10 <sup>5</sup> operations (at 20 times/min.)                                                                           |                                             |
|                            |                                                              | 5 A 250 V AC, 30 V DC                  | Min. 5×10 <sup>4</sup> operations (at 20 times/min.)                                                                           | —                                           |
|                            |                                                              | 5 A 230 V AC                           | —                                                                                                                              | Min. 2×10 <sup>4</sup> operations (at 25°C) |
|                            |                                                              | 5 A 30 V DC                            | —                                                                                                                              | Min. 1×10 <sup>4</sup> operations (at 25°C) |
| Conditions                 | Conditions for operation, transport and storage <sup>3</sup> |                                        | Ambient temperature: -40°C to 70°C -40°F to 158°F;<br>Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) |                                             |
|                            | Max. operating speed (at rated load)                         |                                        | 20 times/min.                                                                                                                  |                                             |
| Unit weight                |                                                              |                                        | Approx. 3 g .15 oz                                                                                                             |                                             |

Notes:


\*1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

\*2 Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981.


\*3 Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT](#) section in [Relay Technical Information](#).

## REFERENCE DATA

### 1. Max. switching capacity

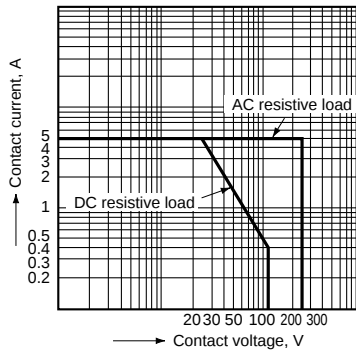


### 2. Life curve

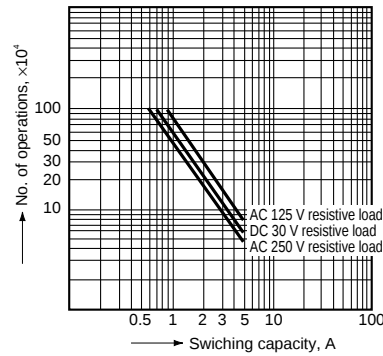


### 3.-(1) Coil temperature rise (180 mW)

Tested sample: PA1a-12V  
Measured portion: Inside the coil  
Ambient temperature: 20°C 68°F

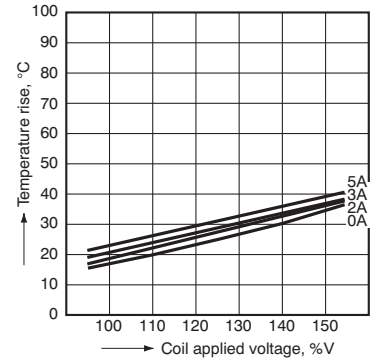


### 3.-(2) Coil temperature rise (120 mW)

Tested sample: PA1a-24V  
Measured portion: Inside the coil  
Ambient temperature: 20°C 68°F

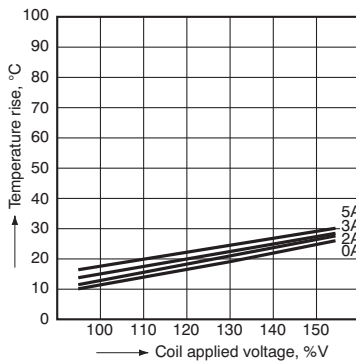


### 4.-(1) Operate & release time (120 mW)

Tested sample: PA1a-12V, 20 pcs.

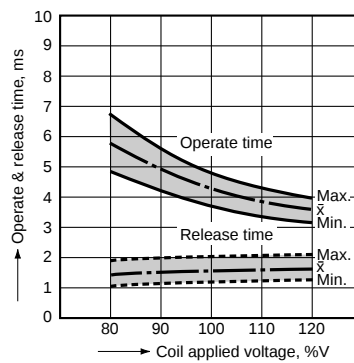


### 4.-(2) Operate & release time (180 mW)

Tested sample: PA1a-24V, 20 pcs.

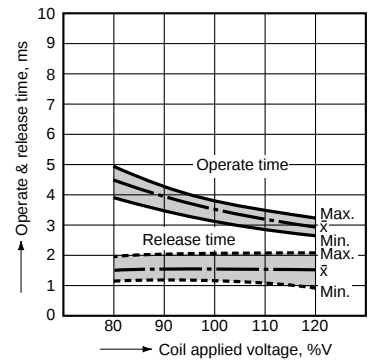


### 5. Ambient temperature characteristics

Tested sample: PA1a-12V, 6 pcs.

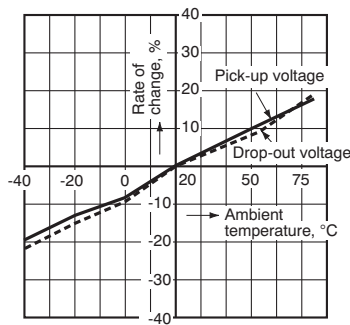

### 6. Malfunctional shock


Tested sample: PA1a-12V, 6 pcs.



DIMENSIONS(mm inch)


Download [CAD Data](#) from our Web site.

CAD Data

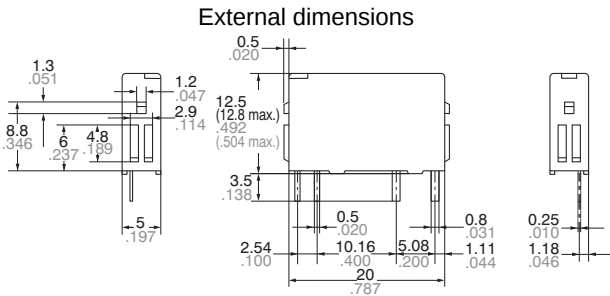


General tolerance:  $\pm 0.3 \pm .012$

PC board pattern (Bottom view)



Tolerance:  $\pm 0.1 \pm .004$

Schematic (Bottom view)




SAFETY STANDARDS

| Certification authority | File No.             | PA type rating                                                                                                                                                                                   | PAD type rating                                                                                            | Remarks |
|-------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------|
| UL/C-UL (Recognized)    | E43149               | 3A 250V AC (1×10 <sup>5</sup> operations)<br>3A 30V DC (1×10 <sup>5</sup> operations)<br>5A 250V AC (5×10 <sup>4</sup> operations)<br>5A 250V AC (5×10 <sup>4</sup> operations)                  | 3A 250V AC (1×10 <sup>5</sup> operations)<br>3A 30V DC (1×10 <sup>5</sup> operations)                      | —       |
| CSA (Certified)         | LR26550 etc.         | 3A 250V AC (1×10 <sup>5</sup> operations)<br>3A 30V DC (1×10 <sup>5</sup> operations)<br>5A 250V AC (5×10 <sup>4</sup> operations)<br>5A 30V DC (5×10 <sup>4</sup> operations)                   | 3A 250V AC (1×10 <sup>5</sup> operations)<br>3A 30V DC (1×10 <sup>5</sup> operations)                      | —       |
| TÜV (Certified)         | B 12 01<br>13461 316 | IEC1131-2 Reinforced<br>3A 250V AC (cosφ=1.0) (1×10 <sup>5</sup> )<br>3A 30V AC (0ms) (1×10 <sup>5</sup> )<br>5A 250V AC (cosφ=1.0) (5×10 <sup>4</sup> )<br>5A 30V AC (0ms) (5×10 <sup>4</sup> ) | IEC1131-2 Reinforced<br>3A 250V AC (cosφ=1.0) (1×10 <sup>5</sup> )<br>3A 30V AC (0ms) (1×10 <sup>5</sup> ) | —       |


## NOTES

1. If it includes ripple, the ripple factor should be less than 5%.
2. Specification values for pick-up and drop-out voltages are for the relay mounting with its terminals below.

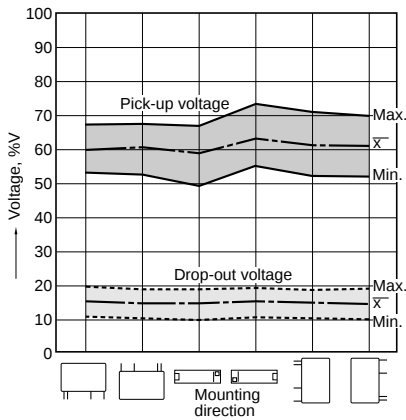


3. When mounting the relays within 1 mm .039 inch, please notice the condition below.



- 1) Mount the relays in the same direction.



- 2) Coil terminals (Terminal No. 1 & 2) polarity should be arranged in the same direction.

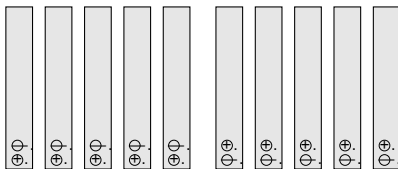

- 3) Allowable contact current is 2 A.
- 4) About the electrical life for close mounting, please refer to data below.

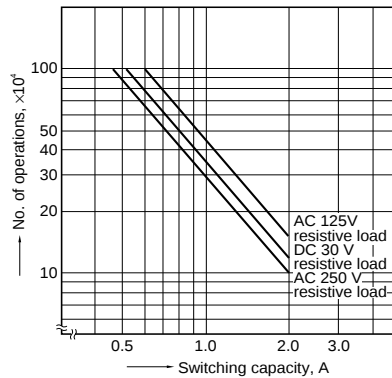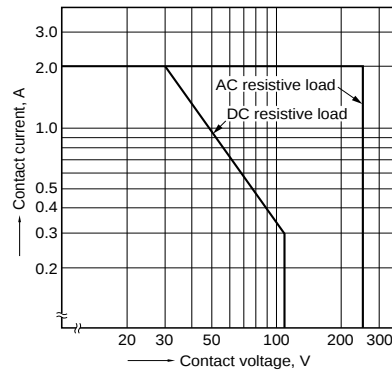

4. Soldering conditions

Please obey the following conditions when soldering automatically:

- (1) Preheating: Within 120°C 248°F (bottom of the PC board) and within 120 seconds
- (2) Soldering iron: 260°C $\pm$ 5°C 500°F $\pm$ 41°F (solder temperature) and within 6 seconds (soldering time)

For Cautions for Use, see [Relay Technical Information](#).

TYPES

| Product name                        | Part No.  |
|-------------------------------------|-----------|
| Standard type terminal socket       | PA1a-PS   |
| Self clinching type terminal socket | PA1a-PS-H |



Standard type  
terminal socket



Self clinching type  
terminal socket


DIMENSIONS (mm inch)

Download [CAD Data](#) from our Web site.

Standard type terminal socket


[CAD Data](#)

External dimensions

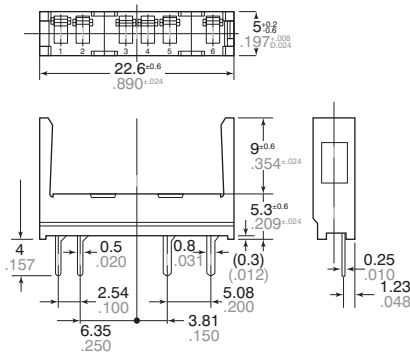

General tolerance:  $\pm 0.3 \pm .012$

PC board pattern (Bottom view)




Tolerance:  $\pm 0.1 \pm .004$

Self clinching type terminal socket


[CAD Data](#)

External dimensions

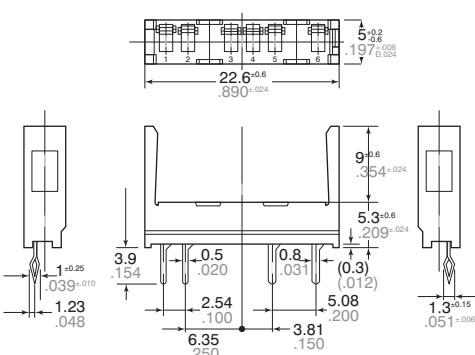

General tolerance:  $\pm 0.3 \pm .012$

PC board pattern (Bottom view)




INSTALLING AND REMOVING

Installing and removing the relay


1) Firmly insert the relay into the socket with the terminals going in the direction of the blade receptacles.

(1) Insert the removal key into the socket slots.



2) The relay can be easily removed using the removal key (APA801).

(2) Pull the removal key up to remove the relay.



(3) Slide the removal key off of the relay.

