

## STPS41L45CG / STPS41L45CT / STPS41L45CR

### THERMAL RESISTANCES

| Symbol        | Parameter        |                    | Value      | Unit |
|---------------|------------------|--------------------|------------|------|
| $R_{th(j-c)}$ | Junction to case | Per diode<br>Total | 1.5<br>0.8 | °C/W |
| $R_{th(c)}$   | Coupling         |                    | 0.1        |      |

When the diodes 1 and 2 are used simultaneously :

$$\Delta T_j(\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)}(\text{Per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

### STATIC ELECTRICAL CHARACTERISTICS (per diode)


| Symbol  | Parameter               | Tests Conditions          |                     | Min. | Typ. | Max. | Unit |
|---------|-------------------------|---------------------------|---------------------|------|------|------|------|
| $I_R^*$ | Reverse leakage current | $T_j = 25^\circ\text{C}$  | $V_R = V_{RRM}$     |      |      | 1.2  | mA   |
|         |                         | $T_j = 125^\circ\text{C}$ |                     |      | 110  | 220  | mA   |
| $V_F^*$ | Forward voltage drop    | $T_j = 25^\circ\text{C}$  | $I_F = 20\text{ A}$ |      |      | 0.53 | V    |
|         |                         | $T_j = 125^\circ\text{C}$ | $I_F = 20\text{ A}$ |      | 0.42 | 0.47 |      |
|         |                         | $T_j = 25^\circ\text{C}$  | $I_F = 40\text{ A}$ |      |      | 0.68 |      |
|         |                         | $T_j = 125^\circ\text{C}$ | $I_F = 40\text{ A}$ |      | 0.60 | 0.66 |      |

Pulse test : \*  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$


To evaluate the conduction losses use the following equation :

$$P = 0.28 \times I_{F(AV)} + 0.0095 I_{F(RMS)}^2$$


**Fig. 1:** Conduction losses versus average current.

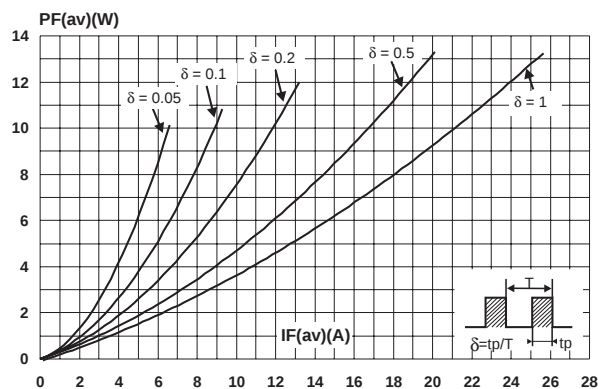


**Fig. 2:** Average forward current versus ambient temperature ( $\delta = 0.5$ ).

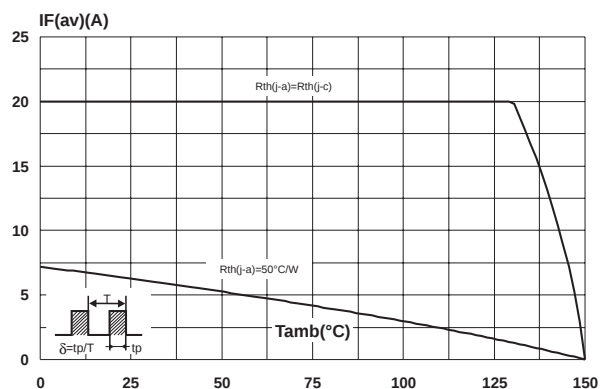


**Fig. 3:** Normalized avalanche power derating versus pulse duration.

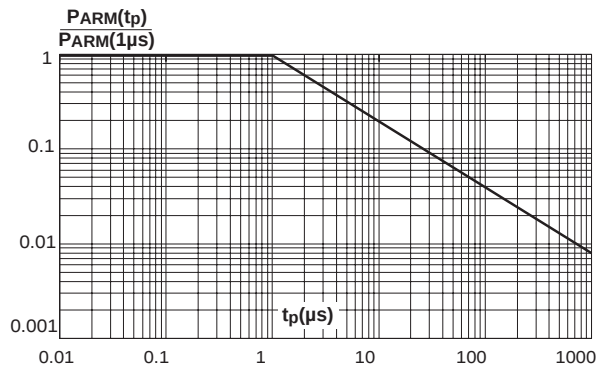


**Fig. 4:** Normalized avalanche power derating versus junction temperature.

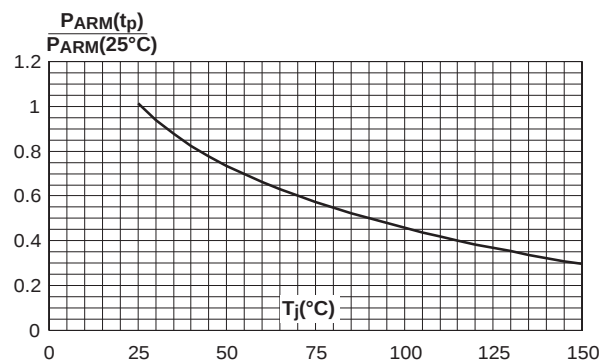


**Fig. 5:** Non repetitive surge peak forward current versus overload duration (maximum values).

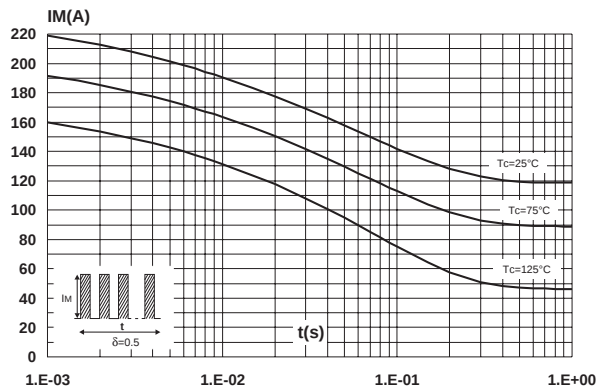

**Fig. 6:** Relative variation of thermal impedance junction to case versus pulse duration.

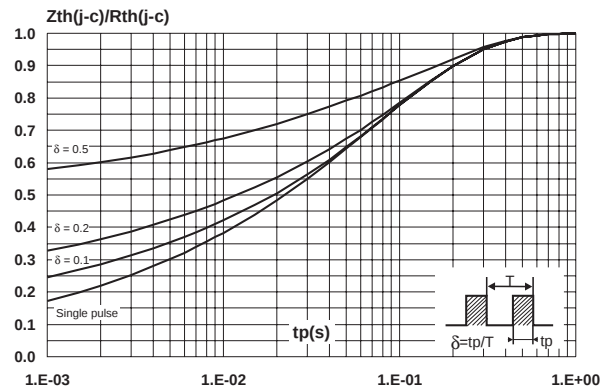

**Fig. 7:** Reverse leakage current versus reverse voltage applied (typical values).

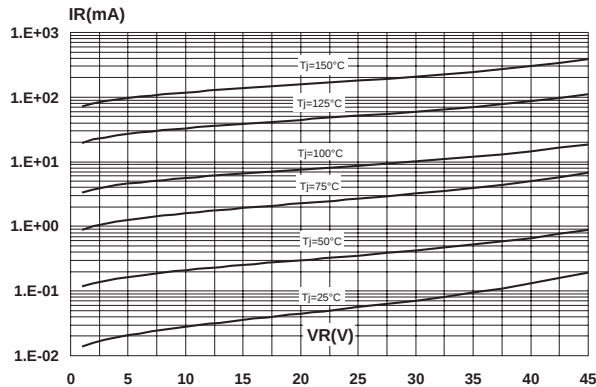

**Fig. 8:** Junction capacitance versus reverse voltage applied (typical values).

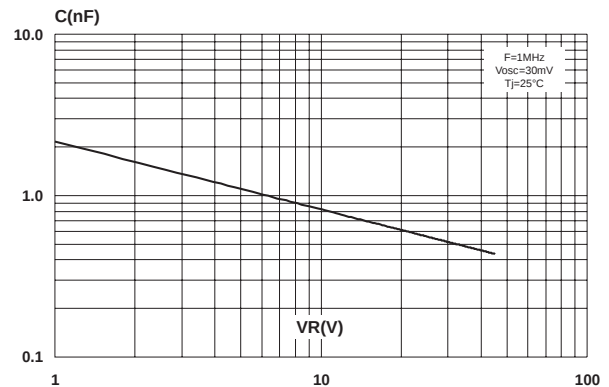


Fig. 9: Forward voltage drop versus forward current.



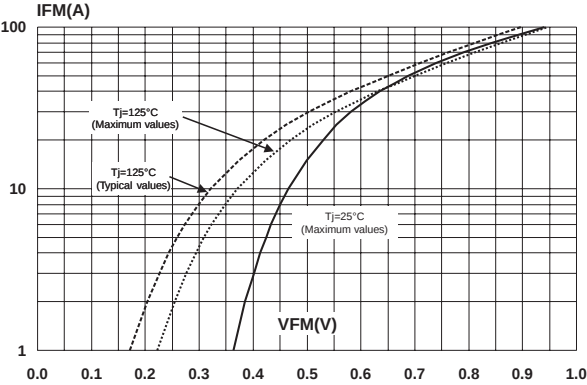



Fig. 10: Thermal resistance junction to ambient versus copper surface under tab (epoxy printed board FR4, Cu = 35μm) (STPS41L45CG only).

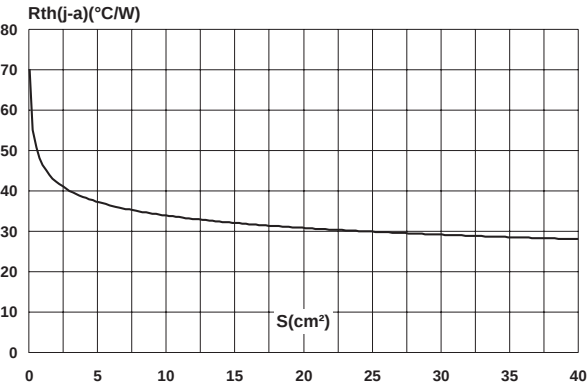


PACKAGE MECHANICAL DATA  
D<sup>2</sup>PAK

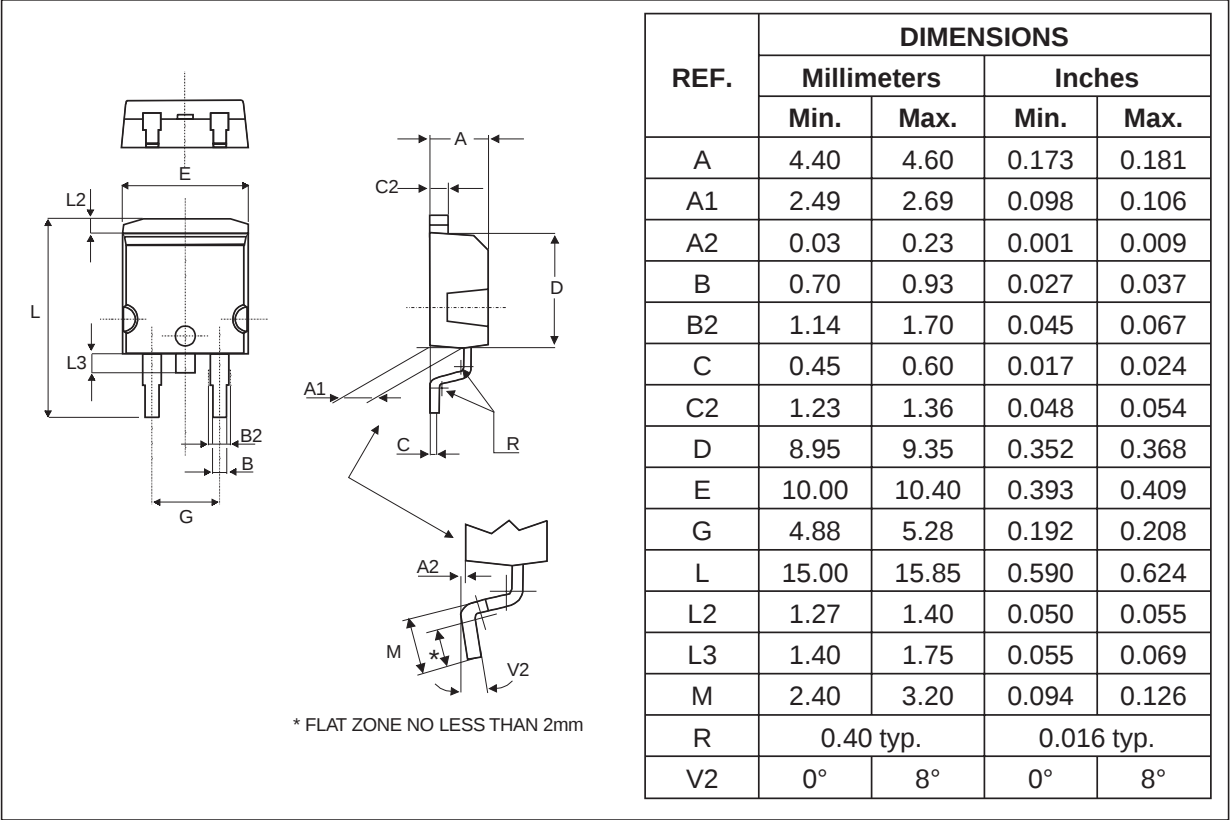

FOOTPRINT (dimensions in mm)

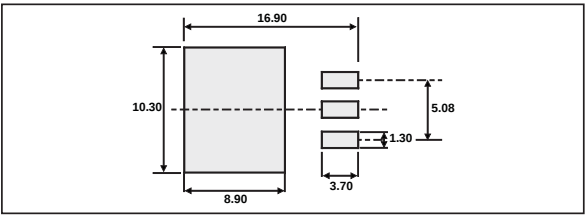

PACKAGE MECHANICAL DATA  
I<sup>2</sup>PAK

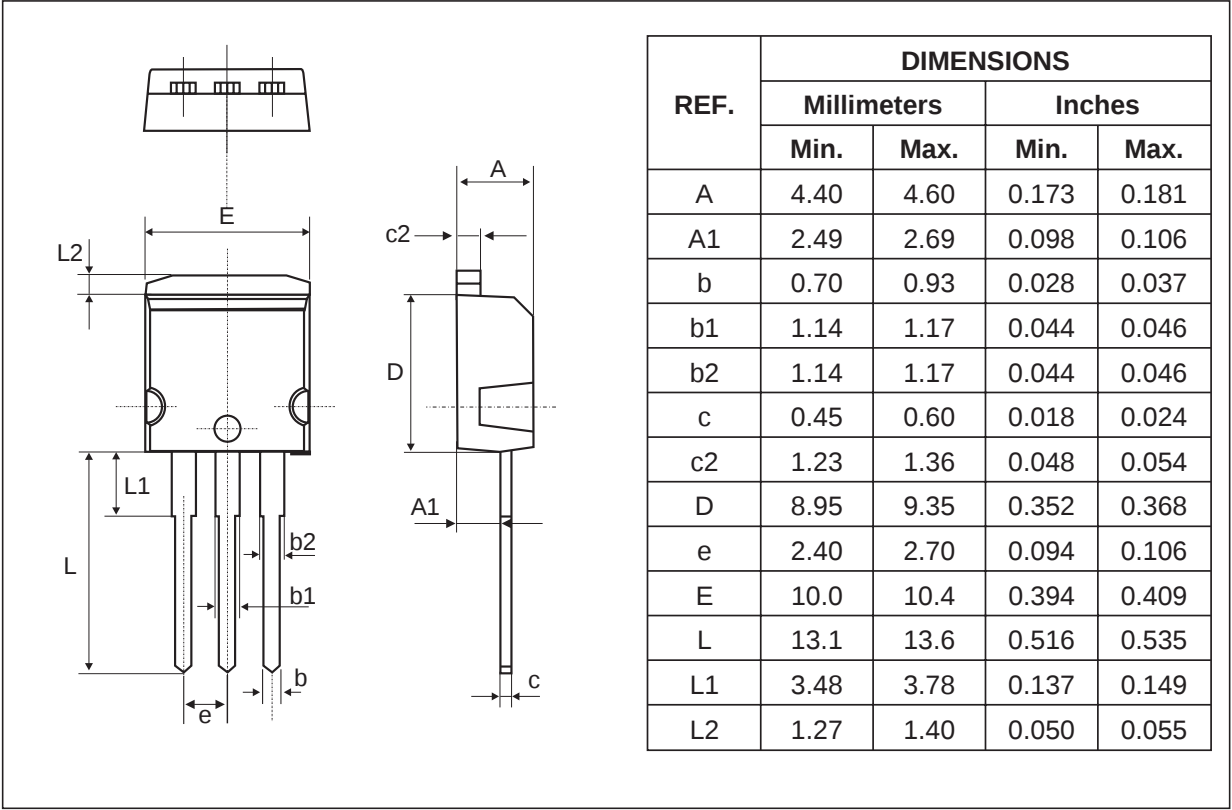

# STPS41L45CG / STPS41L45CT / STPS41L45CR

## PACKAGE MECHANICAL DATA TO-220AB

| REF.  | DIMENSIONS  |       |            |       |
|-------|-------------|-------|------------|-------|
|       | Millimeters |       | Inches     |       |
|       | Min.        | Max.  | Min.       | Max.  |
| A     | 4.40        | 4.60  | 0.173      | 0.181 |
| C     | 1.23        | 1.32  | 0.048      | 0.051 |
| D     | 2.40        | 2.72  | 0.094      | 0.107 |
| E     | 0.49        | 0.70  | 0.019      | 0.027 |
| F     | 0.61        | 0.88  | 0.024      | 0.034 |
| F1    | 1.14        | 1.70  | 0.044      | 0.066 |
| F2    | 1.14        | 1.70  | 0.044      | 0.066 |
| G     | 4.95        | 5.15  | 0.194      | 0.202 |
| G1    | 2.40        | 2.70  | 0.094      | 0.106 |
| H2    | 10          | 10.40 | 0.393      | 0.409 |
| L2    | 16.4 typ.   |       | 0.645 typ. |       |
| L4    | 13          | 14    | 0.511      | 0.551 |
| L5    | 2.65        | 2.95  | 0.104      | 0.116 |
| L6    | 15.25       | 15.75 | 0.600      | 0.620 |
| L7    | 6.20        | 6.60  | 0.244      | 0.259 |
| L9    | 3.50        | 3.93  | 0.137      | 0.154 |
| M     | 2.6 typ.    |       | 0.102 typ. |       |
| Diam. | 3.75        | 3.85  | 0.147      | 0.151 |

| Ordering type  | Marking     | Package            | Weight | Base qty | Delivery mode |
|----------------|-------------|--------------------|--------|----------|---------------|
| STPS41L45CG    | STPS41L45CG | D <sup>2</sup> PAK | 1.48 g | 50       | Tube          |
| STPS41L45CG-TR | STPS41L45CG | D <sup>2</sup> PAK | 1.48 g | 1000     | Tape & reel   |
| STPS41L45CT    | STPS41L45CT | TO-220AB           | 2.20 g | 50       | Tube          |
| STPS41L45CR    | STPS41L45CR | I <sup>2</sup> PAK | 1.49 g | 50       | Tube          |

### ■ EPOXY MEETS UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany  
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>