


## Applications

- automotive
  - 360° surround view system
  - rear view camera
  - lane departure warning/ lane keep assist
  - blind spot detection
  - pedestrian detection
  - traffic sign recognition
  - occupant sensor
  - camera monitoring system/e-mirror
  - autonomous driving

## Product Features

- support for image size:
  - 1392 x 976
  - VGA
  - QVGA, and any cropped size
- high dynamic range
- high sensitivity
- low power consumption
- image sensor processor functions:
  - lens correction
  - defective pixel cancelation
  - HDR combination
  - automatic black level correction
- supported output formats:
  - RAW
- horizontal and vertical sub-sampling
- SCCB for register programming
- high speed serial data transfer with MIPI CSI-2
- parallel 12-bit DVP output
- external frame synchronization capability
- embedded temperature sensor
- one time programmable (OTP) memory

# OV9716




## Ordering Information

- **OV9716-E66Y-1E** (color, lead-free)  
66-pin a-CSP™ in tray
- **OV9716-E66Y-LE** (color, lead-free)  
66-pin a-CSP™ with protective film in tray with protective film (3 mm tab length)
- **OV9716-E66Y-OE** (color, lead-free)  
66-pin a-CSP™ with protective film in tray and reel with protective film (3 mm tab length)
- **OV9716-E66Y-GE** (color, lead-free)  
66-pin a-CSP™ with protective film in tray with protective film (0.5 mm tab length)
- **OV9716-E66Y-KE** (color, lead-free)  
66-pin a-CSP™ with protective film in tray with protective film (0.5 mm tab length)

## Product Specifications

- **active array size:** 1392 x 976
- **power supply:**
  - analog: 3.14 - 3.47V
  - digital: 1.14 - 1.3V
  - DVDD: 1.7 - 1.9V
  - AVDD: 1.7 - 1.9V
- **power requirements:**
  - active: 350 mW
  - standby: 12.5 mW
- **temperature range:**
  - operating: -40°C to +105°C sensor ambient temperature and -40°C to +125°C junction temperature
- **output interfaces:**  
up to 4-lane MIPI CSI-2, 12-bit DVP
- **input clock frequency:** 6 - 36 MHz
- **lens size:** 1/3.8"
- **lens chief ray angle:** 15°
- **scan mode:** progressive
- **output formats:** single exposure HDR - 16-bit combined RAW, 12-bit compressed combined RAW; dual exposure HDR - 16-bit combined RAW + 12-bit VS RAW, 12-bit compressed combined RAW + 12-bit VS RAW, 3x12 bit RAW, 3x10 bit RAW
- **shutter:** rolling shutter
- **maximum image transfer rate:**  
60 fps full resolution
- **sensitivity:** 27,500 e<sup>-</sup>/Lux.s
- **max S/N ratio:** 42.2 dB
- **dynamic range:** 120 dB
- **pixel size:** 2.8 μm x 2.8 μm
- **image area:** 3942.4 μm x 2777.6 μm
- **package dimensions:**  
5814 μm x 5254 μm

## Functional Block Diagram

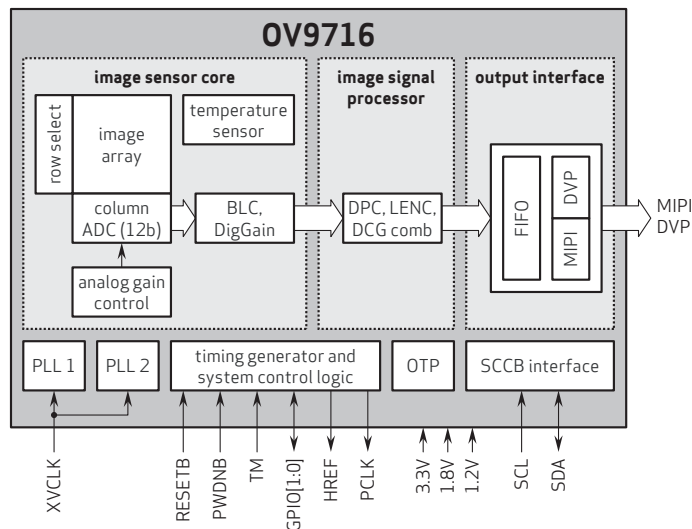

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision and the OmniVision logo are registered trademarks of OmniVision Technologies, Inc. OmniBSI-2, Deep Well and a-CSP are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



**OmniVision**

Version 1.3, April, 2018