


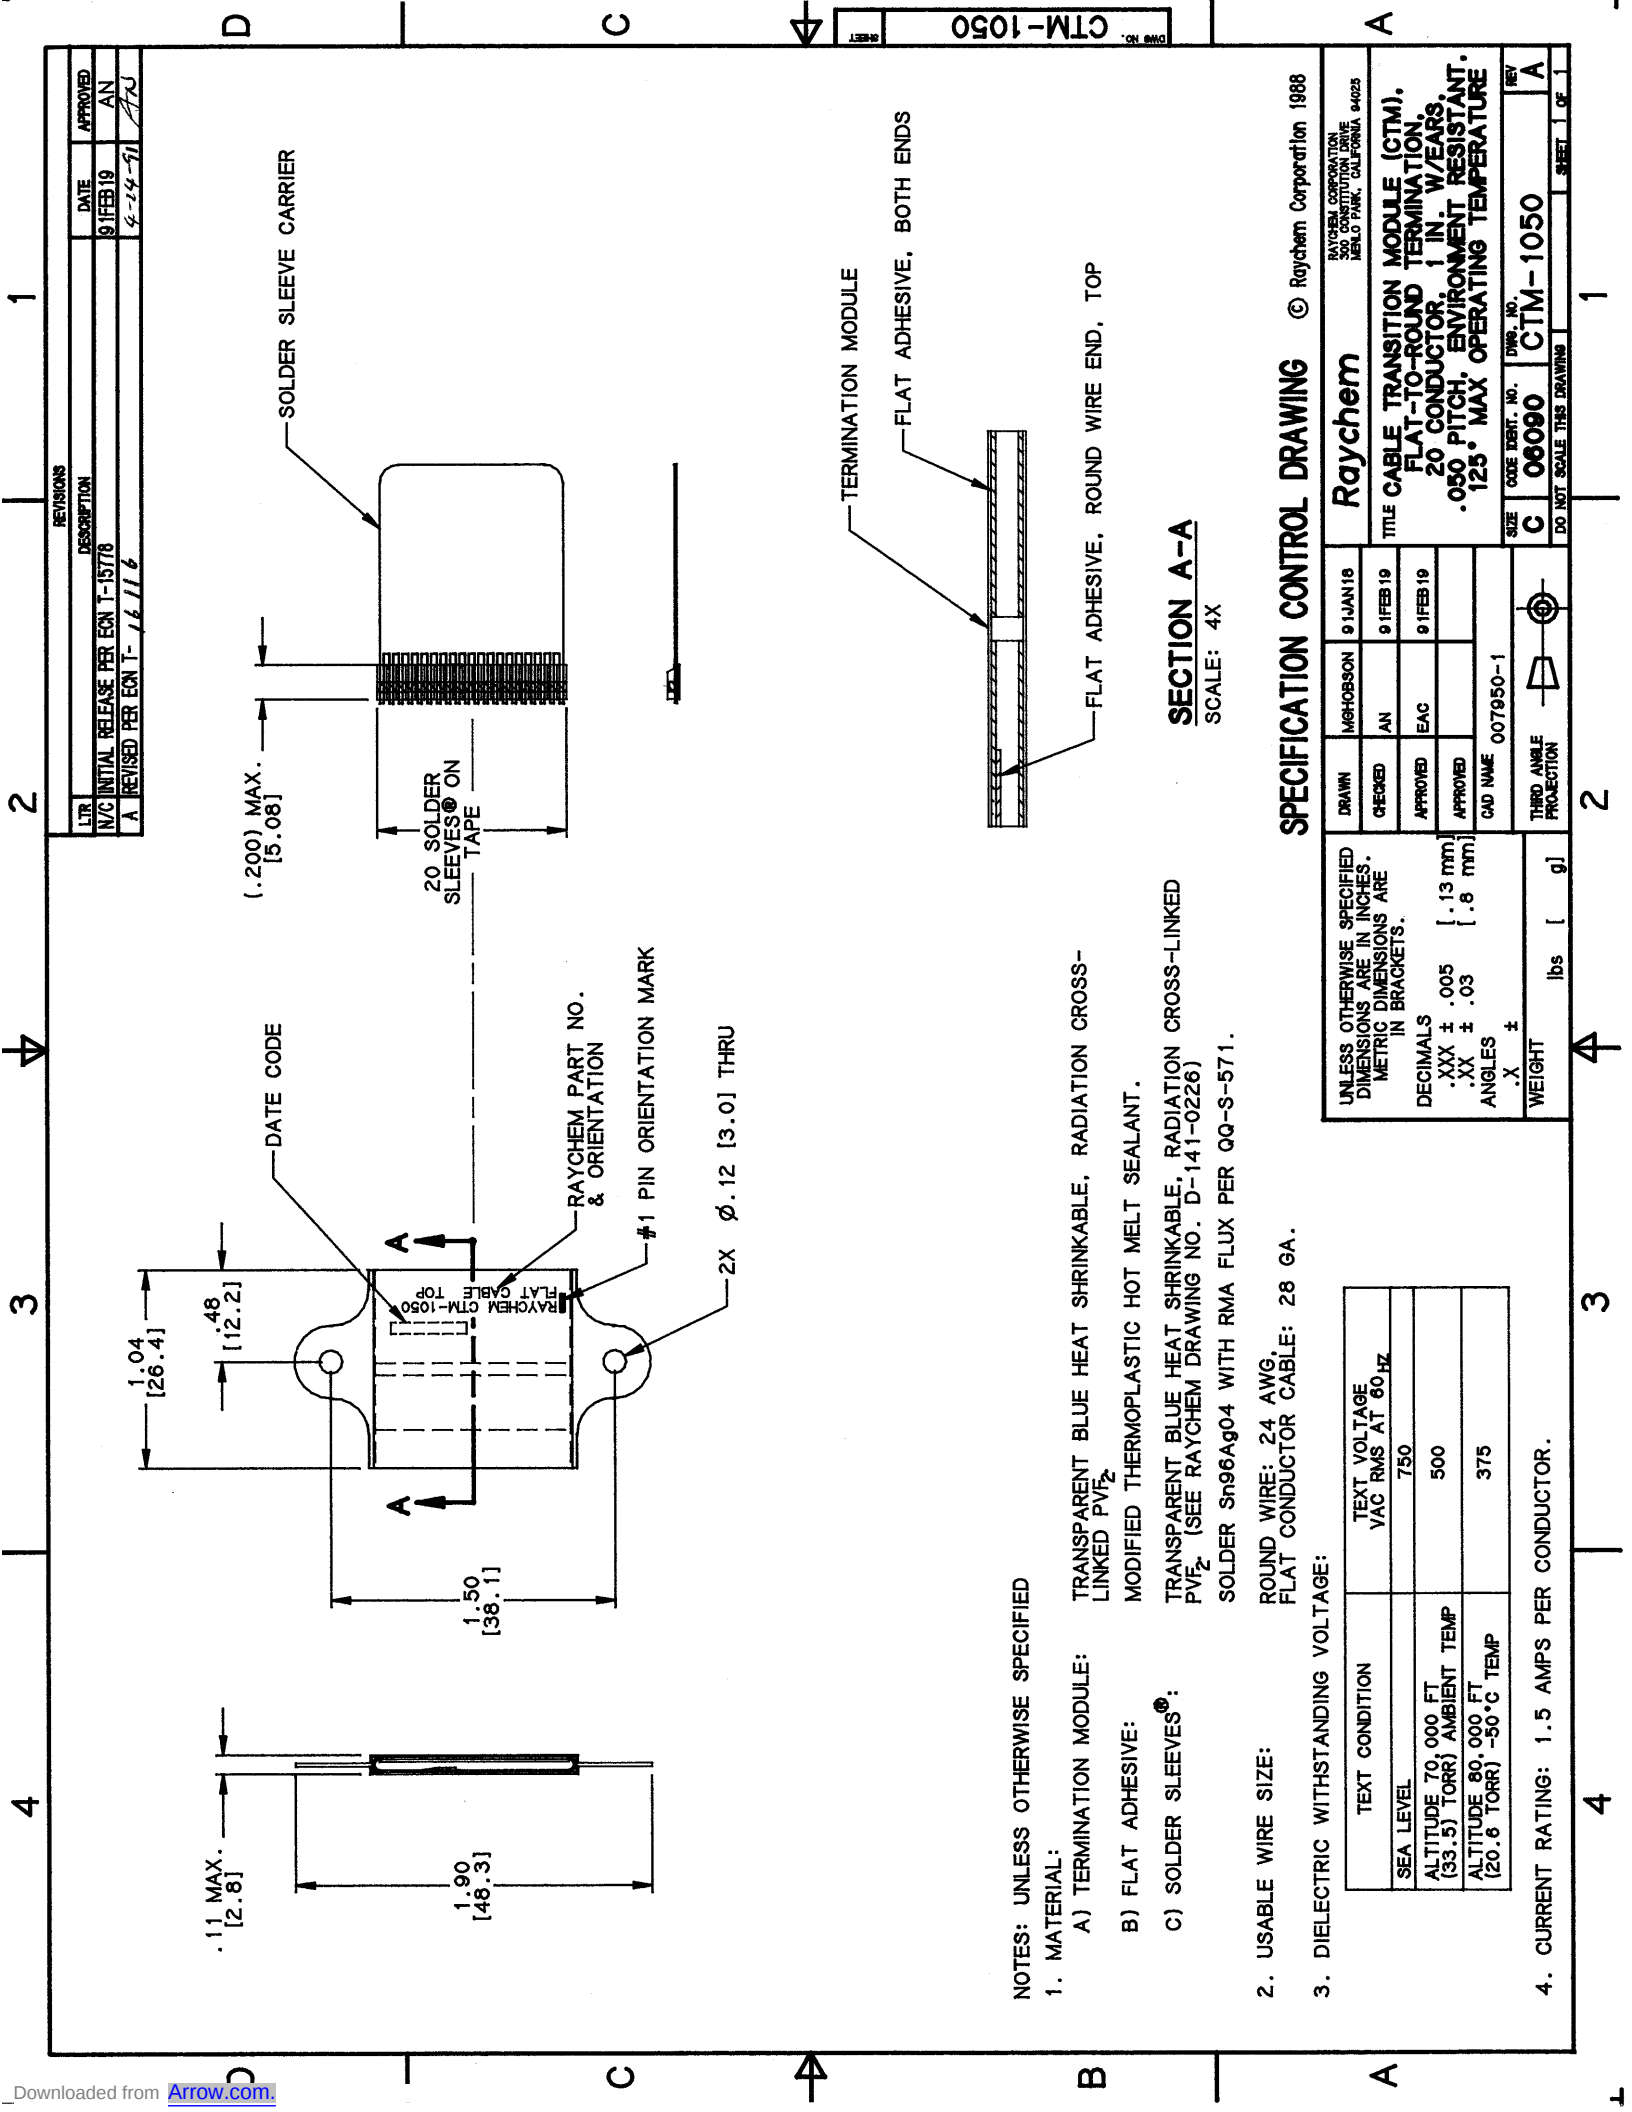

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

A) TERMINATION MODULE: TRANSPARENT BLUE HEAT SHRINKABLE, RADIATION CROSS-LINKED PVF₂

B) FLAT ADHESIVE: MODIFIED THERMOPLASTIC HOT MELT SEALANT.

C) SOLDER SLEEVES®: TRANSPARENT BLUE HEAT SHRINKABLE, RADIATION CROSS-LINKED PVF₂ (SEE RAYCHEM DRAWING NO. D-141-0226)

SOLDER Sn96Ag04 WITH RMA FLUX PER QQ-S-571.

2. USABLE WIRE SIZE: ROUND WIRE: 24 AWG.

FLAT CONDUCTOR CABLE: 28 GA.

3. DIELECTRIC WITHSTANDING VOLTAGE:

TEXT VOLTAGE

VAC RMS AT 60 HZ

SEA LEVEL

ALTITUDE 70,000 FT

(33.5) TORR) AMBIENT TEMP

ALTITUDE 80,000 FT

(20.6 TORR) -50°C TEMP

4. CURRENT RATING: 1.5 AMPS PER CONDUCTOR.

SECTION A-A

SCALE: 4X

SPECIFICATION CONTROL DRAWING © Raychem Corporation 1988

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025

RAYCHEM CORPORATION
10000 RAYCHEM DRIVE
MILFORD PARK, CALIFORNIA 94025