


Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				1200	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				1200	V	
I _R	reverse current, drain current	V _R = 1200 V	T _{VJ} = 25°C			50	μA	
		V _R = 1200 V	T _{VJ} = 125°C			0.5	mA	
V _F	forward voltage drop	I _F = 30 A	T _{VJ} = 25°C			2.26	V	
		I _F = 60 A				3.00	V	
		I _F = 30 A	T _{VJ} = 125°C			2.27	V	
		I _F = 60 A				3.20	V	
I _{FAV}	average forward current	T _C = 90°C rectangular d = 0.5	T _{VJ} = 150°C			30	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 150°C		1.25	V	
r _F	slope resistance					30	mΩ	
R _{thJC}	thermal resistance junction to case					0.7	K/W	
R _{thCH}	thermal resistance case to heatsink				0.3		K/W	
P _{tot}	total power dissipation	T _C = 25°C				180	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		200	A	
C _J	junction capacitance	V _R = 600 V f = 1 MHz		T _{VJ} = 25°C	11		pF	
I _{RM}	max. reverse recovery current	} I _F = 30 A; V _R = 600 V -di _F /dt = 600 A/μs		T _{VJ} = 25 °C	23		A	
				T _{VJ} = 125 °C	30		A	
t _{rr}	reverse recovery time			T _{VJ} = 25 °C	200		ns	
				T _{VJ} = 125 °C	350		ns	

Package TO-247			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			70	A
T_{VJ}	virtual junction temperature		-55		150	°C
T_{op}	operation temperature		-55		125	°C
T_{stg}	storage temperature		-55		150	°C
Weight				6		g
M_D	mounting torque		0.8		1.2	Nm
F_C	mounting force with clip		20		120	N

Product Marking



Part description

D = Diode
 H = Sonic Fast Recovery Diode
 G = extreme fast
 30 = Current Rating [A]
 I = Single Diode
 1200 = Reverse Voltage [V]
 HA = TO-247AD (2)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DHG30I1200HA	DHG30I1200HA	Tube	30	503098

Similar Part	Package	Voltage class
DSEP30-12A	TO-247AD (2)	1200
DSEP29-12A	TO-220AC (2)	1200
DSEP30-12AR	ISOPLUS247 (2)	1200
DSEP30-12CR	ISOPLUS247 (2)	1200

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 150^{\circ}\text{C}$



Fast Diode

$V_{0\max}$ threshold voltage


1.25

V


$R_{0\max}$ slope resistance *

27

mΩ

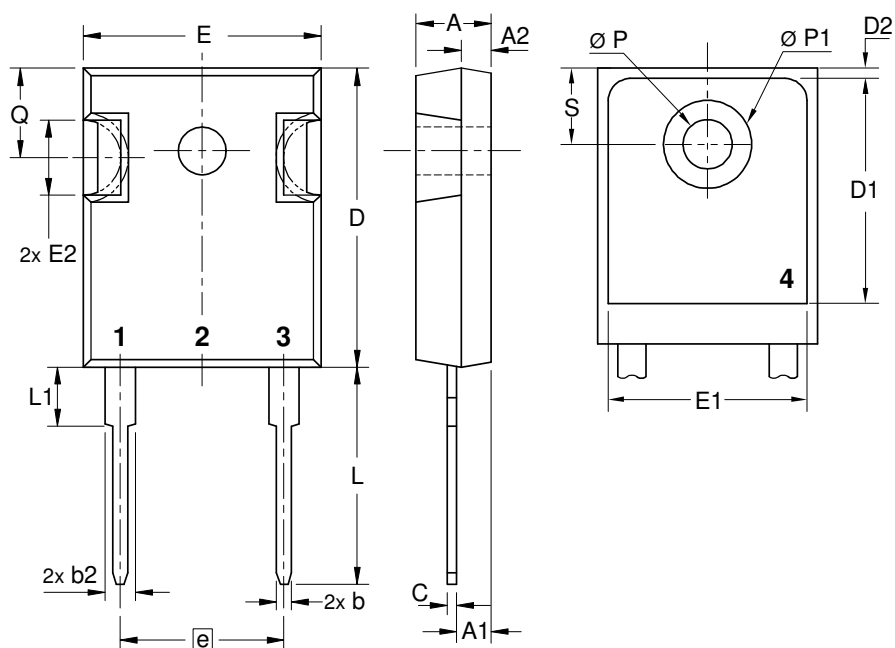Outlines TO-247


Sym.	Inches		Millimeter	
	min.	max.	min.	max.
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.430	BSC	10.92	BSC
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
Ø P	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242	BSC	6.14	BSC
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
Ø P1	-	0.29	-	7.39



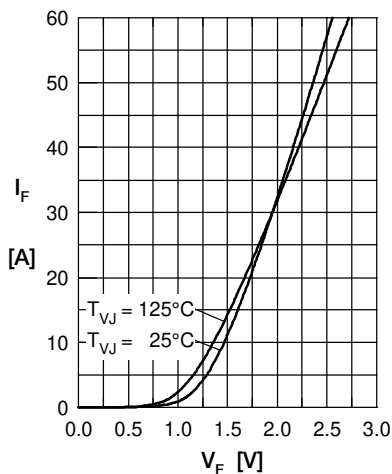
Fast Diode


Fig. 1 Typ. Forward current versus V_F

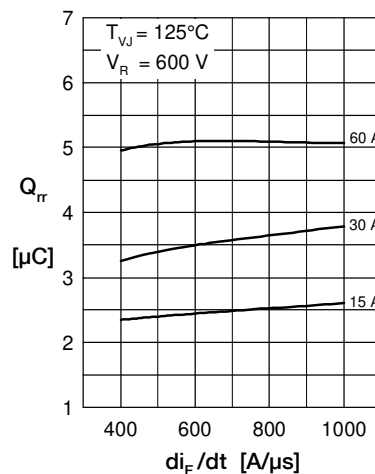


Fig. 2 Typ. reverse recov. charge Q_{rr} versus di_F/dt

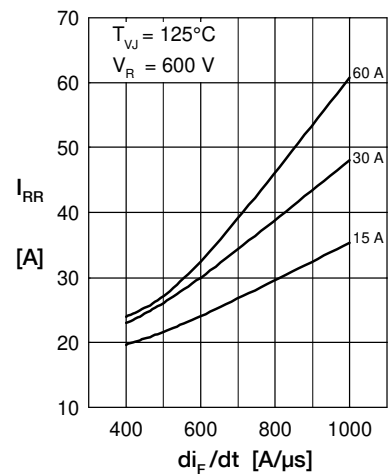


Fig. 3 Typ. peak reverse current I_{RM} versus di_F/dt

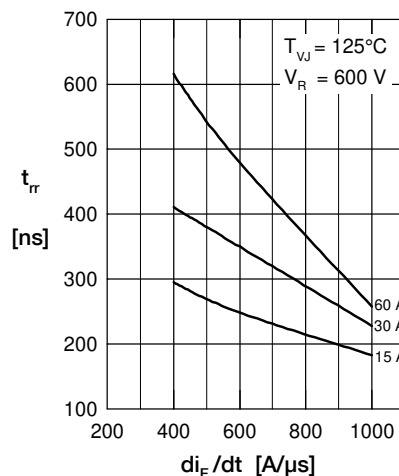


Fig. 4 Dynamic parameters Q_{rr} , I_{RM} versus T_{VJ}

Fig. 5 Typ. recovery time t_{rr} versus di/dt

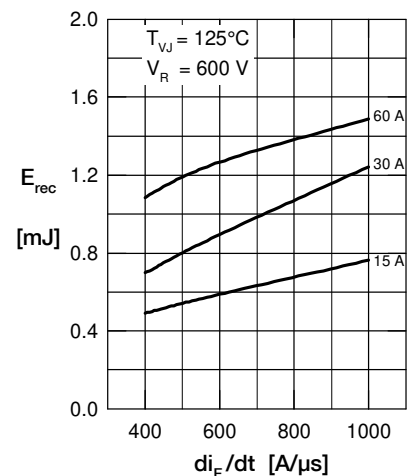


Fig. 6 Typ. recovery energy E_{rec} versus di/dt

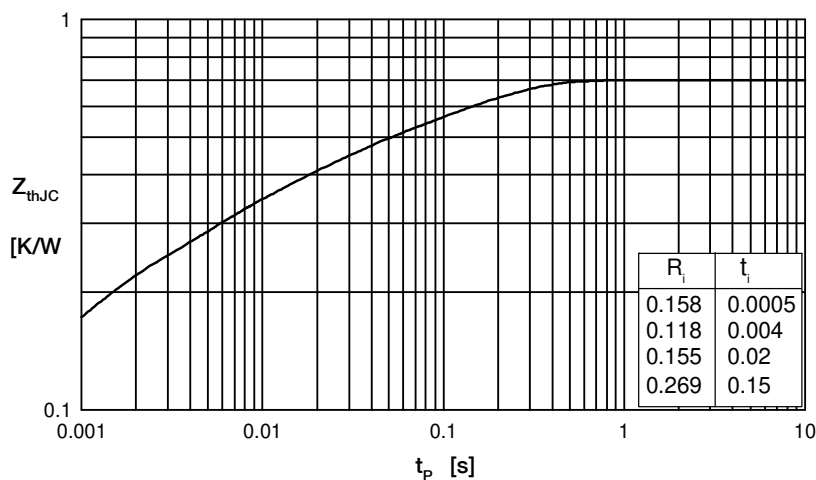


Fig. 7 Typ. transient thermal impedance junction to case