

# #FSLM2520-151J=P2



## Specifications

L size	2.5±0.2mm
W size	2.0±0.2mm
T size	1.7mm
Size code inch (mm)	1008 (2520)
Inductance	150μH±5%
Inductance Test Frequency	0.796MHz
Max. of DC resistance	22Ω
Operating Temperature Range (Self-temperature rise is included)	-40°C to 85°C
Class of magnetic shield	No Shield
Q(min.)	15
Q Test Frequency	0.796MHz
Self resonance frequency (min.)	7.5MHz
Rated Current	50mA
Series	LLM2520

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# #FSLM2520-151J=P2



## Characteristic Data

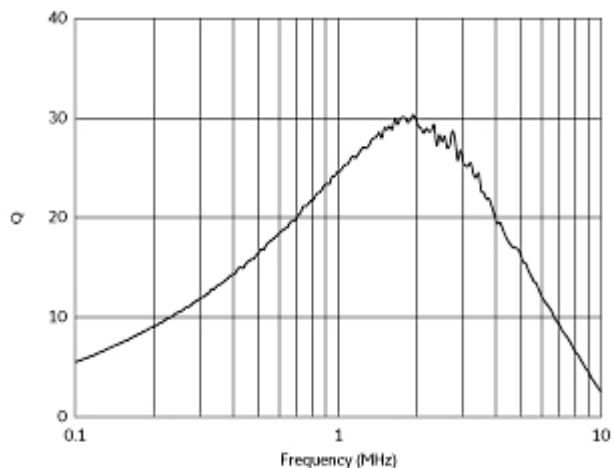

Q-Frequency Characteristics

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.