

ELECTRICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise noted)

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS ⁽²⁾				
Forward-Current Transfer Ratio $I_C = 5.0\text{Adc}$, $V_{CE} = 2.0\text{Vdc}$ $I_C = 25\text{Adc}$, $V_{CE} = 2.0\text{Vdc}$ $I_C = 50\text{Adc}$, $V_{CE} = 5.0\text{Vdc}$	h_{FE}	30 15 5.0	60	
Collector-Emitter Saturation Voltage $I_C = 25\text{Adc}$, $I_B = 2.5\text{Adc}$ $I_C = 50\text{Adc}$, $I_B = 10\text{Adc}$	$V_{CE(sat)}$		1.0 5.0	Vdc
Base-Emitter Saturation Voltage $I_C = 25\text{Adc}$, $I_B = 2.5\text{Adc}$	$V_{BE(sat)}$		2.0	Vdc
Base-Emitter Voltage $I_C = 25\text{Adc}$, $V_{CE} = 2.0\text{Vdc}$	$V_{BE(ON)}$		2.0	Vdc

DYNAMIC CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Magnitude of Common Emitter Small-Signal Short-Circuit, Forward Current Transfer Ratio $I_C = 5.0\text{Adc}$, $V_{CE} = 10\text{Vdc}$, $f = 1.0\text{MHz}$	$ h_{fe} $	2.0	20	
Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 10\text{Adc}$, $V_{CE} = 5.0\text{Vdc}$, $f = 1.0\text{kHz}$	h_{fe}	15		
Output Capacitance $V_{CB} = 10\text{Vdc}$, $I_E = 0$, $0.1\text{MHz} \leq f \leq 1.0\text{MHz}$	C_{obo}		1200	pF

SWITCHING CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Turn-On Time $V_{CC} = 30\text{Vdc}$; $I_C = 25\text{Adc}$; $I_{B1} = 2.5\text{Adc}$	t_{on}		1.5	μs
Turn-Off Time $V_{CC} = 30\text{Vdc}$; $I_C = 25\text{Adc}$; $I_{B1} = -I_{B2} = 2.5\text{Adc}$	t_{off}		3.0	μs

SAFE OPERATING AREA

DC Tests

$T_C = +25^\circ\text{C}$, 1 Cycle, $t = 1.0\text{s}$

Test 1

$V_{CE} = 6.0\text{Vdc}$, $I_C = 50\text{Adc}$

Test 2

$V_{CE} = 30\text{Vdc}$, $I_C = 10\text{Adc}$


Test 3

$V_{CE} = 50\text{Vdc}$, $I_C = 560\text{mAdc}$ 2N5685

$V_{CE} = 60\text{Vdc}$, $I_C = 640\text{mAdc}$ 2N5686

(2) Pulse Test: Pulse Width = $300\mu\text{s}$, Duty Cycle $\leq 2.0\%$

PACKAGE DIMENSIONS

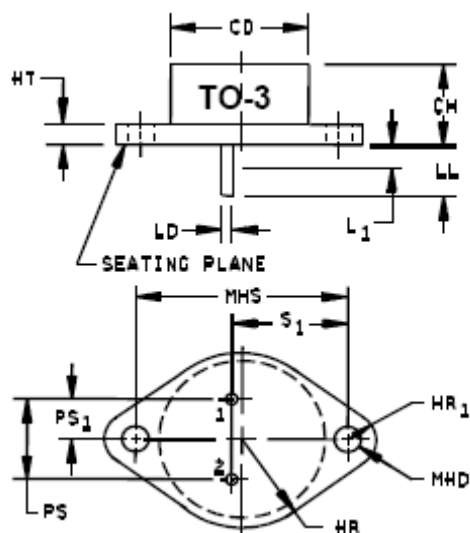

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD		.875		22.22	3
CH	.250	.450	6.35	11.43	
HR	.495	.525	12.57	13.34	
HR ₁	.131	.188	3.33	4.78	6
HT	.060	.135	1.52	3.43	
LD	.057	.063	1.45	1.60	4, 5, 9
LL	.312	.500	7.92	12.70	4, 5, 9
L ₁		.050		1.27	5, 9
MHD	.151	.165	3.84	4.19	7
MHS	1.177	1.197	29.90	30.40	
PS	.420	.440	10.67	11.18	
PS ₁	.205	.225	5.21	5.72	5
S ₁	.655	.675	16.64	17.15	

NOTE:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Body contour is optional within zone defined by CD.
4. These dimensions shall be measured at points .050 inch (1.27 mm) to .055 inch (1.40 mm) below seating plane. When gauge is not used, measurement shall be made at seating plane.
5. Both terminals.
6. At both ends.
7. Two holes.
8. The collector shall be electrically connected to the case.
9. LD applies between L₁ and LL. Lead diameter shall not exceed twice LD within L₁.
10. In accordance with ASME Y14.5M, diameters are equivalent to ϕ x symbology.
- * 11. Terminal 1 is emitter; terminal 2 is base; case is collector.

* **FIGURE 1.** Physical dimensions (TO-3)