




# LT1004

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                                            |                |                                   |                |
|--------------------------------------------|----------------|-----------------------------------|----------------|
| Reverse Breakdown Current .....            | 30mA           | Operating Temperature Range       |                |
| Forward Current .....                      | 10mA           | LT1004M ( <b>OBSOLETE</b> ) ..... | –55°C to 125°C |
| Storage Temperature Range .....            | –65°C to 150°C | LT1004I .....                     | –40°C to 85°C  |
| Lead Temperature (Soldering, 10 sec) ..... | 300°C          | LT1004C .....                     | 0°C to 70°C    |

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                 |                                |                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>BOTTOM VIEW</p>  <p>H PACKAGE<br/>2-LEAD TO-46 METAL CAN</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 440^{\circ}\text{C/W}</math>, <math>\theta_{JC} = 80^{\circ}\text{C/W}</math></p> | <p>TOP VIEW</p>  <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 100^{\circ}\text{C}</math>, <math>\theta_{JA} = 150^{\circ}\text{C/W}</math></p> |                                | <p>BOTTOM VIEW</p>  <p>Z PACKAGE<br/>3-LEAD PLASTIC TO-92</p> <p><math>T_{JMAX} = 100^{\circ}\text{C}</math>, <math>\theta_{JA} = 160^{\circ}\text{C/W}</math></p> |
| ORDER PART<br>NUMBER                                                                                                                                                                                                                                                                                   | ORDER PART<br>NUMBER                                                                                                                                                                                                                            | S8 PART<br>MARKING             | ORDER PART<br>NUMBER                                                                                                                                                                                                                                  |
| LT1004MH-1.2    LT1004CH-1.2<br>LT1004MH-2.5    LT1004CH-2.5<br><b>OBSOLETE PACKAGE</b><br>Consider the SO-8 or Z Packages for Alternate Source                                                                                                                                                        | LT1004CS8-1.2<br>LT1004CS8-2.5<br>LT1004IS8-1.2<br>LT1004IS8-2.5                                                                                                                                                                                | 0412<br>0425<br>0412I<br>0425I | LT1004CZ-1.2<br>LT1004CZ-2.5<br>LT1004IZ-1.2<br>LT1004IZ-2.5                                                                                                                                                                                          |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}\text{C}$ . (Note 2)

| SYMBOL                                  | PARAMETER                                     | CONDITIONS                                                                  | LT1004-1.2 |       |       | LT1004-2.5 |       |       | UNITS                   |
|-----------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------|------------|-------|-------|------------|-------|-------|-------------------------|
|                                         |                                               |                                                                             | MIN        | TYP   | MAX   | MIN        | TYP   | MAX   |                         |
| $V_Z$                                   | Reverse Breakdown Voltage                     | $I_R = 100\mu\text{A}$                                                      | 1.231      | 1.235 | 1.239 | 2.480      | 2.500 | 2.520 | V                       |
|                                         |                                               | LT1004M: $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ ●          | 1.220      | 1.230 | 1.245 | 2.460      | 2.500 | 2.535 | V                       |
|                                         |                                               | LT1004C: $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$ ●             | 1.225      | 1.235 | 1.245 | 2.470      | 2.500 | 2.530 | V                       |
|                                         |                                               | LT1004I: $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ ●           | 1.220      | 1.230 | 1.245 | 2.460      | 2.500 | 2.530 | V                       |
| $\frac{\Delta V_Z}{\Delta \text{Temp}}$ | Average Temperature Coefficient               | $I_{MIN} \leq I_R \leq 20\text{mA}$ (Note 3)                                |            | 20    |       |            | 20    |       | ppm/ $^{\circ}\text{C}$ |
| $I_{MIN}$                               | Minimum Operating Current                     |                                                                             |            | 8     | 10    |            | 12    | 20    | $\mu\text{A}$           |
| $\frac{\Delta V_Z}{\Delta I_R}$         | Reverse Breakdown Voltage Change with Current | $I_{MIN} \leq I_R \leq 1\text{mA}$                                          |            |       | 1.0   |            |       | 1.0   | mV                      |
|                                         |                                               |                                                                             |            |       | 1.5   |            |       | 1.5   | mV                      |
|                                         |                                               | $1\text{mA} \leq I_R \leq 20\text{mA}$                                      |            |       | 10    |            |       | 10    | mV                      |
| $r_Z$                                   | Reverse Dynamic Impedance                     | $I_R = 100\mu\text{A}$                                                      |            | 0.2   | 0.6   |            | 0.2   | 0.6   | $\Omega$                |
|                                         |                                               |                                                                             |            |       | 1.5   |            |       | 1.5   | $\Omega$                |
| $e_n$                                   | Wide Band Noise (RMS)                         | $I_R = 100\mu\text{A}$ , $10\text{Hz} \leq f \leq 10\text{kHz}$             |            | 60    |       |            | 120   |       | $\mu\text{V}$           |
| $\frac{\Delta V_Z}{\Delta \text{Time}}$ | Long Term Stability                           | $I_R = 100\mu\text{A}$ , $T_A = 25^{\circ}\text{C} \pm 0.1^{\circ}\text{C}$ |            | 20    |       |            | 20    |       | ppm/kHr                 |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.


**Note 2:** All specifications are for  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

**Note 3:** Selected devices with guaranteed maximum temperature coefficient are available upon request.

For MIL-STD components, please refer to LTC 883C data sheet for test listing and parameters.


# TYPICAL PERFORMANCE CHARACTERISTICS (1.2V)

Reverse Characteristics

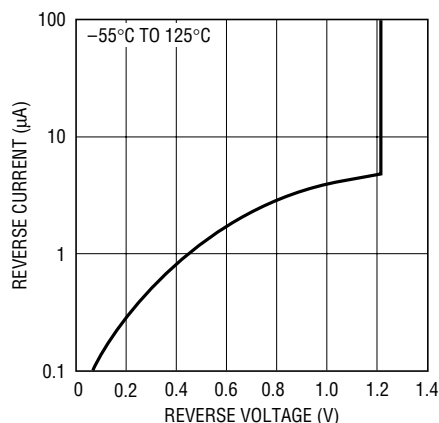


1004 G01

Reverse Voltage Change

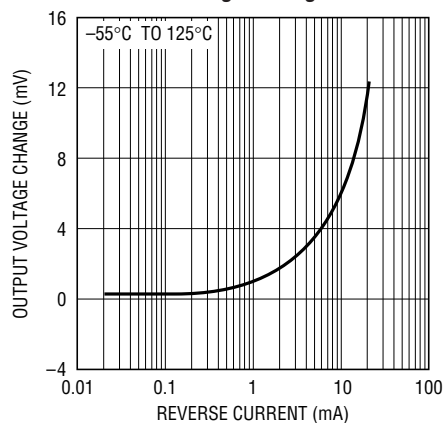


1004 G02

Forward Characteristics

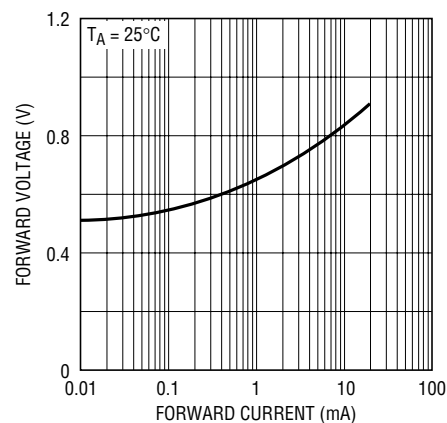


1004 G11

Temperature Drift

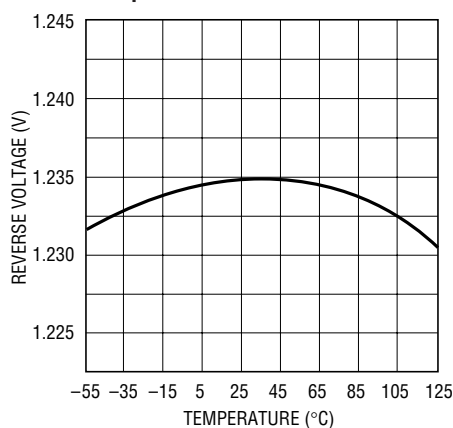


1004 G04

Reverse Dynamic Impedance

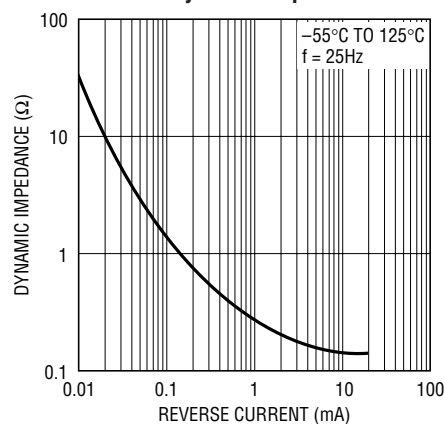


1004 G05

Reverse Dynamic Impedance

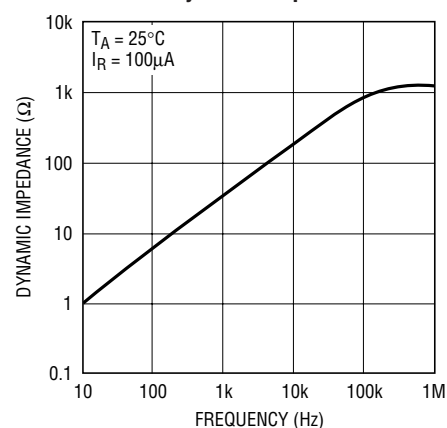


1004 G06

Noise Voltage

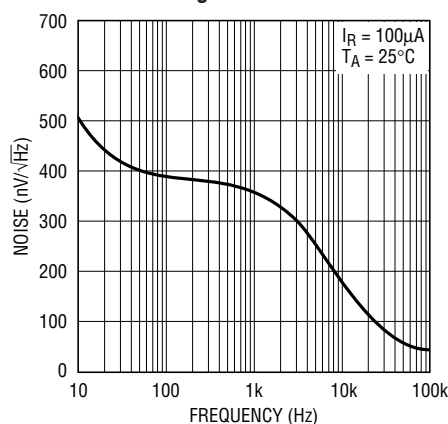


1004 G07

Filtered Output Noise

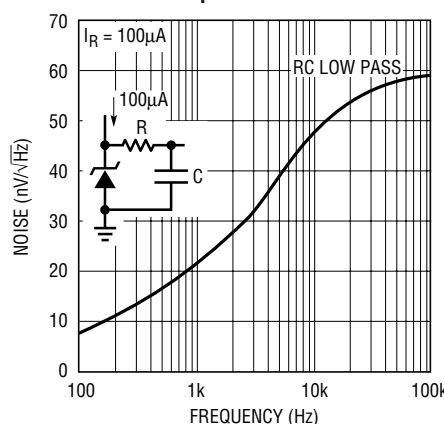

1004 G08


Response Time

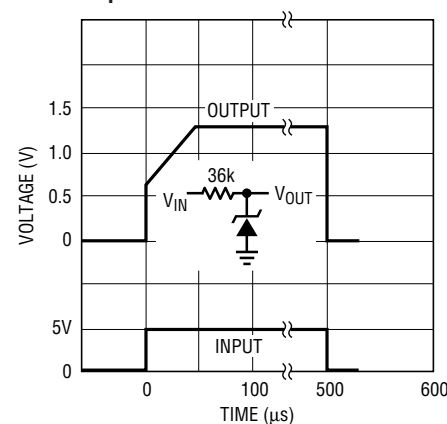


1004 G09

# TYPICAL PERFORMANCE CHARACTERISTICS (2.5V)


Reverse Characteristics

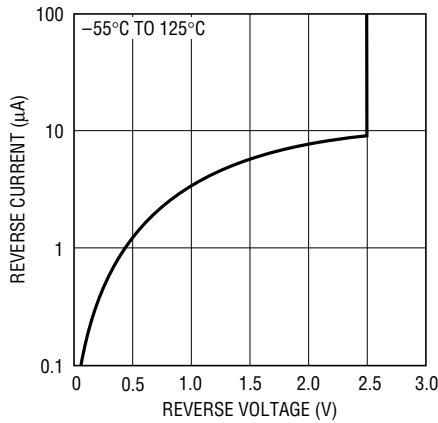


Forward Characteristics

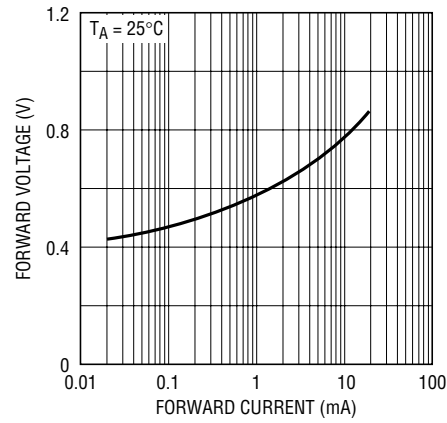


Temperature Drift

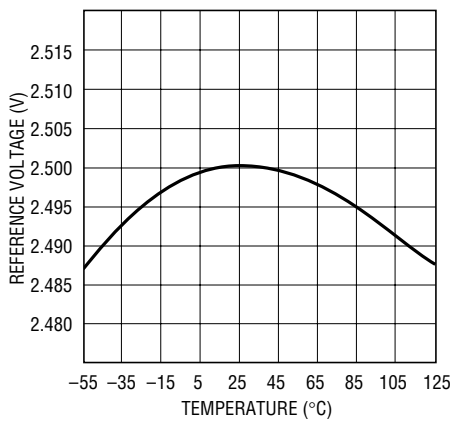


Reverse Dynamic Impedance

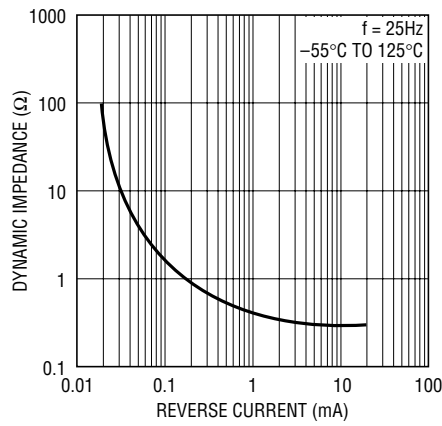


Reverse Dynamic Impedance

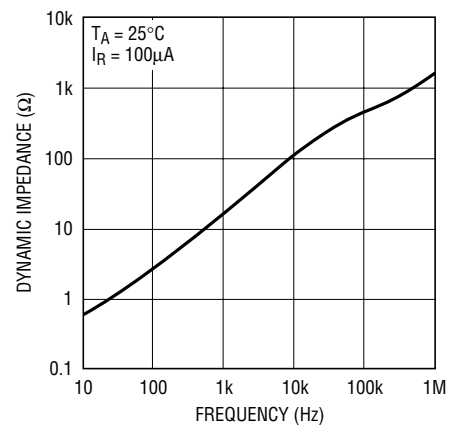


Noise Voltage

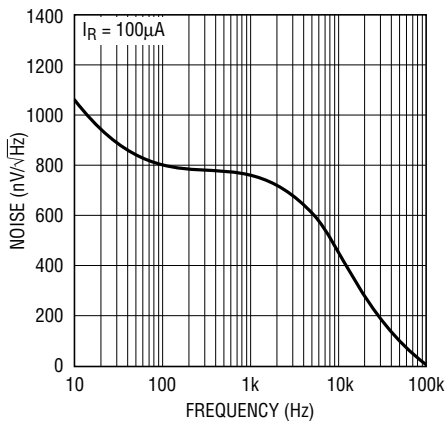

Filtered Output Noise

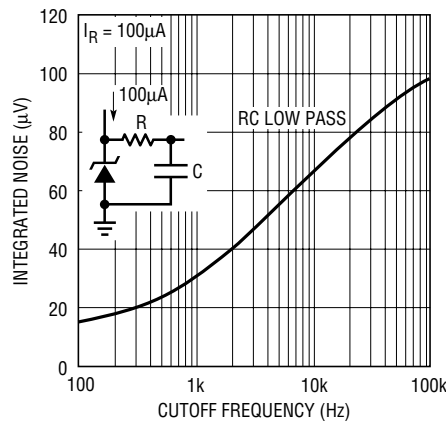


Reponse Time

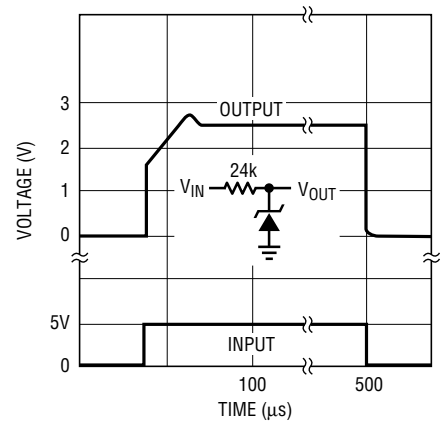


# TYPICAL APPLICATIONS


## High Stability 5V Regulator

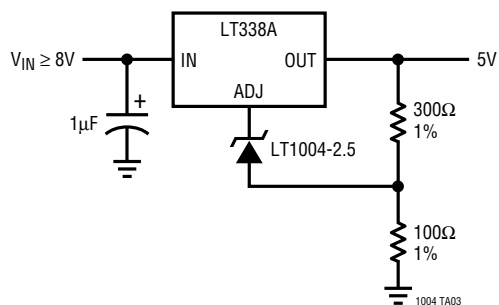


## Variable Output Supply

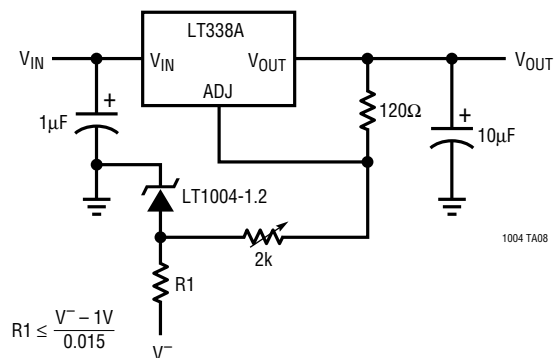


## Constant Gain Amplifier Over Temperature

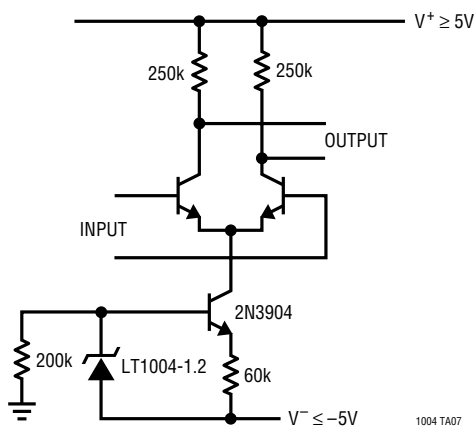


## Micropower 5V Reference

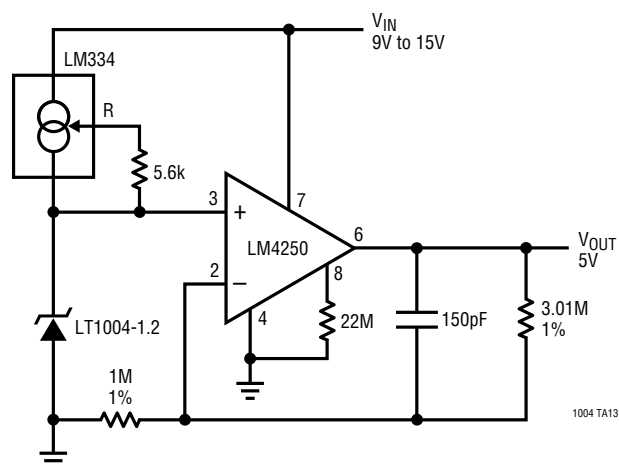

## Lead Acid Low-Battery Detector

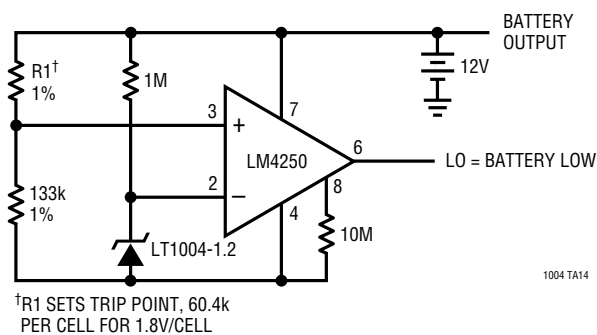


## Ground Referenced Current Source

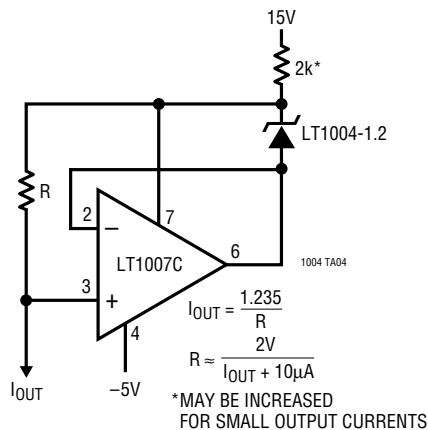


## TYPICAL APPLICATIONS


VPP Generator for Eeproms — No Trim Required

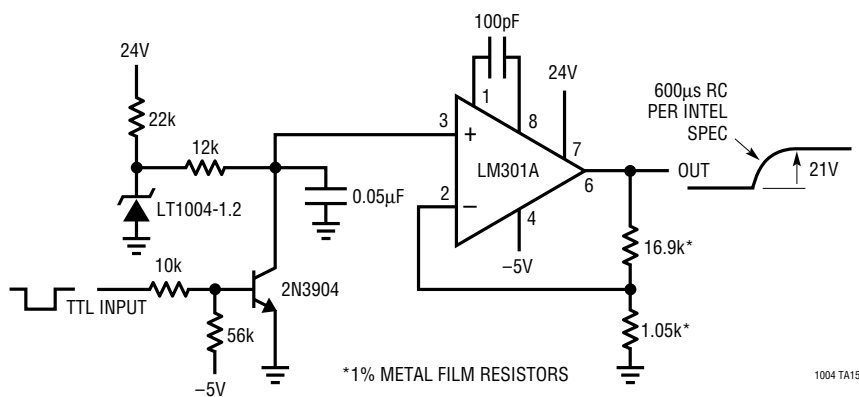


1.2V Reference from 1.5V Battery




Micropower Reference from 9V Battery



2.5V Reference




Low Noise Reference

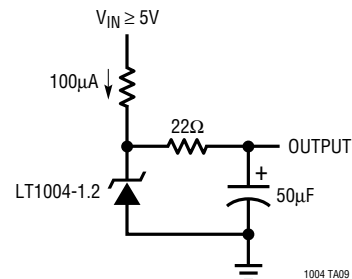


## SCHEMATIC DIAGRAMS

LT1004-1.2

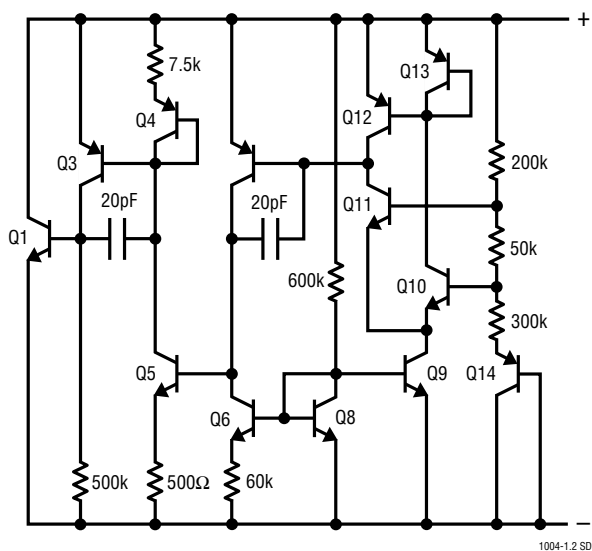


LT1004-2.5

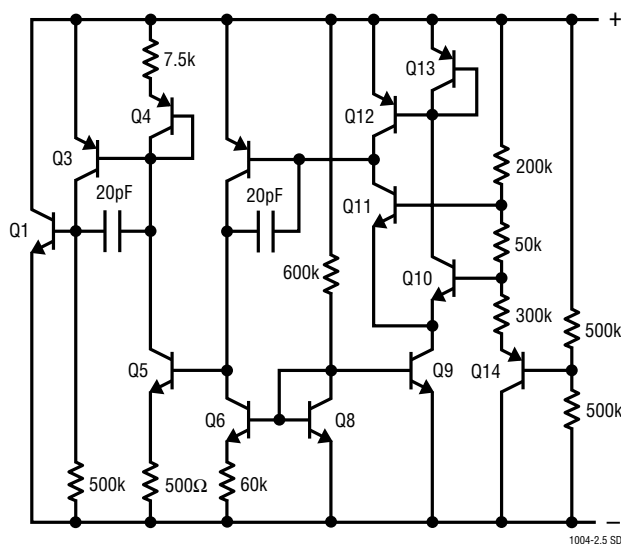


## PACKAGE DESCRIPTION

**H Package**  
**2-Lead and 3-Lead TO-46 Metal Can**  
(Reference LTC DWG # 05-08-1340)

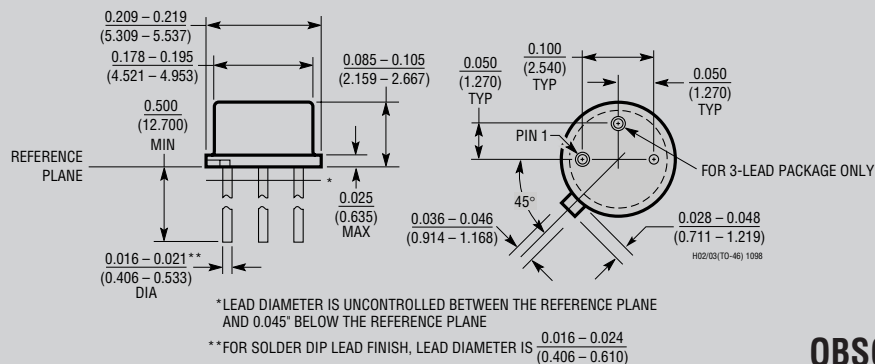


## OBSOLETE PACKAGE

**S8 Package**  
**8-Lead Plastic Small Outline (Narrow .150 Inch)**  
 (Reference LTC DWG # 05-08-1610)

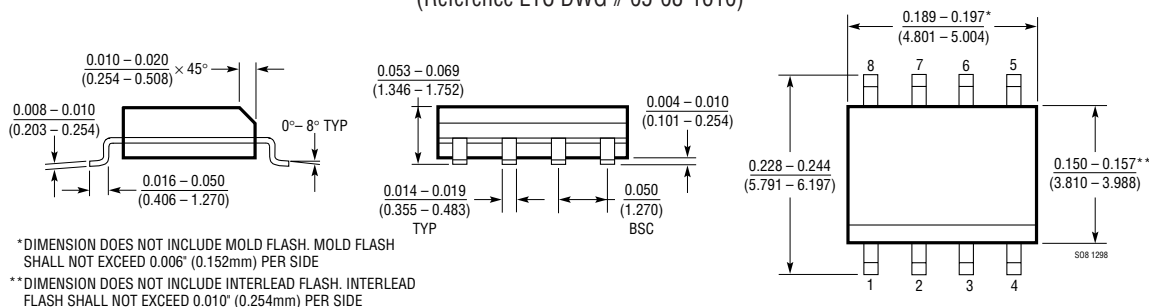


**Z Package**  
**3-Lead Plastic TO-92 (Similar to TO-226)**  
 (Reference LTC DWG # 05-08-1410)

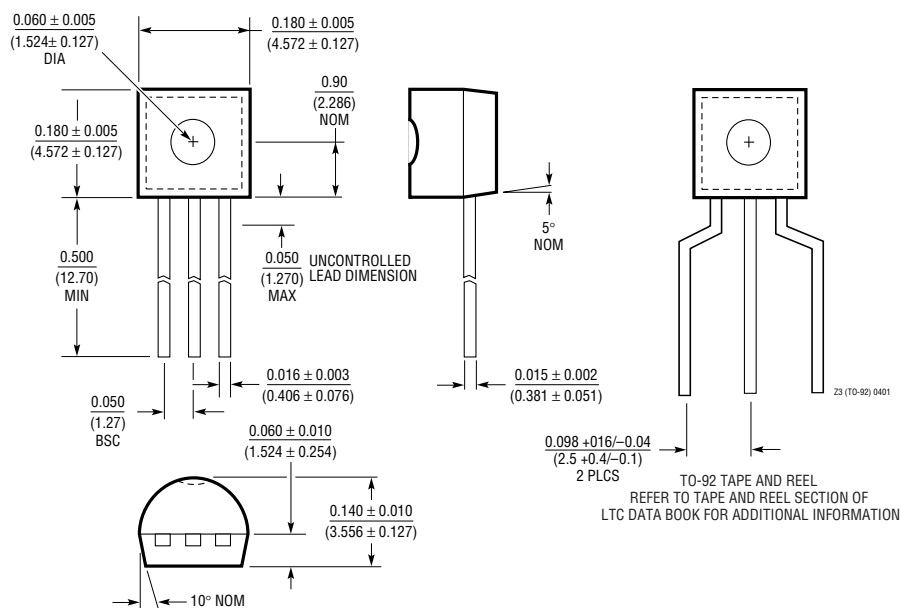


TYPICAL APPLICATIONS

0°C to 100°C Linear Output Thermometer

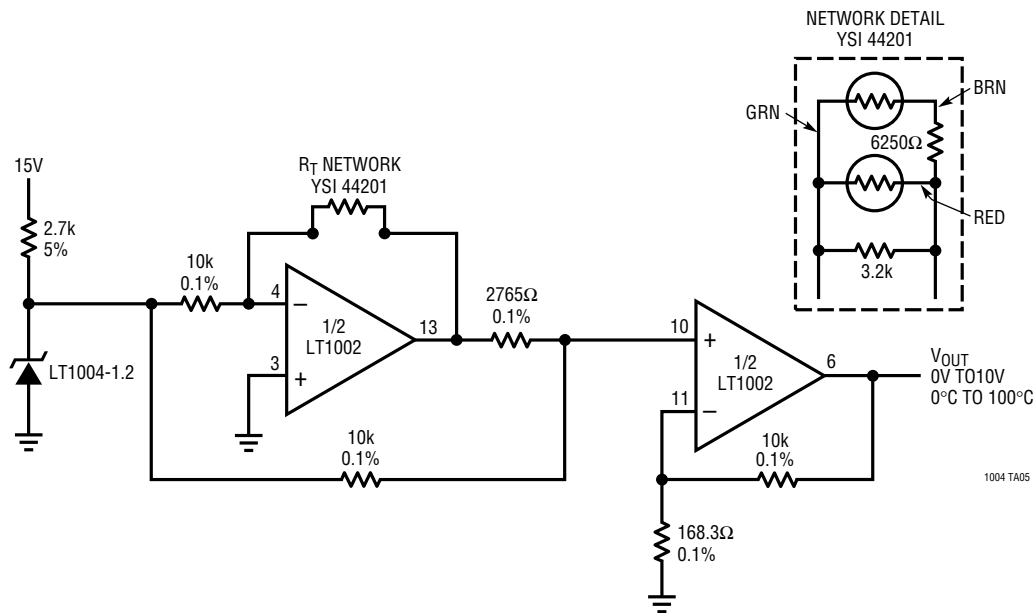

Low Temperature Coefficient  
2-Terminal Current Source



RELATED PARTS

| PART NUMBER  | DESCRIPTION                                  | COMMENTS                                                               |
|--------------|----------------------------------------------|------------------------------------------------------------------------|
| LT1634       | Micropower Precision Shunt Reference         | 10μA Operating Current, 10ppm/°C Maximum Drift, 0.05% Initial Accuracy |
| LT1460S3-2.5 | Micropower Series Reference in SOT-23        | 100μA Operating Current, 20ppm/°C Maximum Drift, 0.2% Initial Accuracy |
| LT1790       | Precision Micropower LDO Reference in SOT-23 | 10ppm/°C Max Drift, 0.05% Initial Accuracy                             |