

Surface Mount Aluminum Electrolytic Capacitors NACY Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μ F)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Ripple Current (mA) +105°C/100kHz	Max. Z (Ω) +20°C/100kHz	Load Life Hours @ +105°C
NACY270M6.3V4X6.3TR13F	27	6.3	0.24	90	1.45	1,000
NACY470M6.3V5X6.3TR13F	47		0.24	170	0.7	1,000
NACY560M6.3V5X6.3TR13F	56		0.24	170	0.7	1,000
NACY101M6.3V6.3X6.3TR13F	100		0.24	250	0.39	1,000
NACY151M6.3V6.3X6.3TR13F	150		0.24	250	0.39	1,000
NACY221M6.3V6.3X6.3TR13F	220		0.24	250	0.39	1,000
NACY331M6.3V6.3X8TR13F	330		0.24	300	0.3	1,000
NACY471M6.3V8X10.5TR13F	470		0.28	600	0.15	2,000
NACY681M6.3V8X10.5TR13F	680		0.28	600	0.15	2,000
NACY102M6.3V8X10.5TR13F	1000		0.28	600	0.15	2,000
NACY152M6.3V10X10.5TR13F	1500		0.28	850	0.08	2,000
NACY332M6.3V12.5X14TR15F	3300		0.32	1150	0.058	2,000
NACY682M6.3V16X17TR15F	6800		0.36	1800	0.035	2,000
NACY220M10V4X6.3TR13F	22	10	0.20	90	1.45	1,000
NACY330M10V5X6.3TR13F	33		0.20	170	0.7	1,000
NACY680M10V6.3X6.3TR13F	68		0.20	250	0.39	1,000
NACY151M10V6.3X6.3TR13F	150		0.20	250	0.39	1,000
NACY221M10V6.3X8TR13F	220		0.20	300	0.3	1,000
NACY331M10V8X10.5TR13F	330		0.24	600	0.15	2,000
NACY471M10V8X10.5TR13F	470		0.24	600	0.15	2,000
NACY102M10V10X10.5TR13F	1000		0.24	850	0.08	2,000
NACY222M10V12.5X14TR15F	2200		0.26	1150	0.058	2,000
NACY472M10V16X17TR15F	4700		0.30	1800	0.035	2,000
NACY150M16V4X6.3TR13F	15	16	0.16	90	1.45	1,000
NACY220M16V5X6.3TR13F	22		0.16	170	0.7	1,000
NACY470M16V6.3X6.3TR13F	47		0.16	250	0.39	1,000
NACY680M16V6.3X6.3TR13F	68		0.16	250	0.39	1,000
NACY101M16V6.3X6.3TR13F	100		0.16	250	0.39	1,000
NACY151M16V6.3X8TR13F	150		0.16	300	0.3	1,000
NACY221M16V6.3X8TR13F	220		0.16	300	0.3	1,000
NACY331M16V8X10.5TR13F	330		0.20	600	0.15	2,000
NACY471M16V8X10.5TR13F	470		0.20	600	0.15	2,000
NACY681M16V10X10.5TR13F	680		0.20	850	0.08	2,000
NACY152M16V12.5X14TR15F	1500		0.20	1150	0.058	2,000
NACY332M16V16X17TR15F	3300		0.24	1800	0.035	2,000
NACY100M25V4X6.3TR13F	10	25	0.14	90	1.45	1,000
NACY150M25V5X6.3TR13F	15		0.14	170	0.7	1,000
NACY220M25V5X6.3TR13F	22		0.14	170	0.7	1,000
NACY330M25V6.3X6.3TR13F	33		0.14	250	0.39	1,000
NACY470M25V6.3X6.3TR13F	47		0.14	250	0.39	1,000
NACY560M25V6.3X6.3TR13F	56		0.14	250	0.39	1,000
NACY680M25V6.3X6.3TR13F	68		0.14	250	0.39	1,000
NACY101M25V6.3X8TR13F	100		0.14	300	0.3	1,000
NACY151M25V8X10.5TR13F	150		0.16	600	0.15	2,000
NACY221M25V8X10.5TR13F	220		0.16	600	0.15	2,000
NACY331M25V8X10.5TR13F	330		0.16	600	0.15	2,000
NACY471M25V10X10.5TR13F	470		0.16	850	0.08	2,000
NACY102M25V12.5X14TR15F	1000		0.16	1150	0.058	2,000
NACY222M25V16X17TR15F	2200		0.18	1800	0.035	2,000
NACY4R7M35V4X6.3TR13F	4.7	35	0.12	90	1.45	1,000
NACY100M35V5X6.3TR13F	10		0.12	170	0.7	1,000
NACY150M35V5X6.3TR13F	15		0.12	170	0.7	1,000
NACY220M35V5X6.3TR13F	22		0.12	170	0.7	1,000
NACY330M35V6.3X6.3TR13F	33		0.12	250	0.39	1,000
NACY470M35V6.3X6.3TR13F	47		0.12	250	0.39	1,000
NACY680M35V6.3X8TR13F	68		0.12	300	0.30	1,000
NACY101M35V8X10.5TR13F	100		0.14	600	0.15	2,000
NACY151M35V8X10.5TR13F	150		0.14	600	0.15	2,000
NACY221M35V8X10.5TR13F	220		0.14	600	0.15	2,000

For Automotive Equipment, see part number system



NIC COMPONENTS CORP. www.niccomp.com | www.lowESR.com | www.RFpassives.com | www.SMTmagnetics.com

Surface Mount Aluminum Electrolytic Capacitors NACY Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Ripple Current (mA) +105°C/100kHz	Max. Z (Ω) +20°C/100kHz	Load Life Hours @ +105°C
NACY331M35V10X10.5TR13F	330	35	0.14	850	0.08	2,000
NACY471M35V12.5X14TR15F	470		0.14	1150	0.058	2,000
NACY681M35V12.5X14TR15F	680		0.14	1150	0.058	2,000
NACY102M35V16X17TR15F	1000		0.14	1800	0.035	2,000
NACY152M35V16X17TR15F	1500		0.14	1800	0.035	2,000
NACY4R7M50V4X6.3TR13F	4.7	50	0.12	64	2.55	1,000
NACY100M50V6.3X6.3TR13F	10		0.12	215	0.52	1,000
NACY220M50V6.3X6.3TR13F	22		0.12	215	0.52	1,000
NACY330M50V6.3X8TR13F	33		0.12	243	0.44	1,000
NACY470M50V6.3X8TR13F	47		0.12	243	0.44	1,000
NACY101M50V8X10.5TR13F	100		0.14	400	0.22	2,000
NACY221M50V10X10.5TR13F	220		0.14	585	0.13	2,000
NACY331M50V12.5X14TR15F	330		0.14	800	0.10	2,000
NACY102M50V16X17TR15F	1000		0.14	1610	0.065	2,000
NACY4R7M63V5X6.3TR13F	4.7	63	0.10	55	2.00	1,000
NACY100M63V6.3X6.3TR13F	10		0.10	90	1.00	1,000
NACY220M63V6.3X8TR13F	22		0.10	135	0.80	1,000
NACY330M63V8X10.5TR13F	33		0.12	280	0.35	2,000
NACY470M63V8X10.5TR13F	47		0.12	280	0.35	2,000
NACY101M63V10X10.5TR13F	100		0.12	480	0.20	2,000
NACY221M63V12.5X14TR15F	220		0.12	800	0.14	2,000
NACY471M63V16X17TR15F	470		0.12	1410	0.065	2,000
NACY4R7M80V6.3X6.3TR13F	4.7	80	0.08	45	2.40	1,000
NACY100M80V6.3X8TR13F	10		0.08	65	2.00	1,000
NACY220M80V8X10.5TR13F	22		0.10	140	0.90	2,000
NACY330M80V8X10.5TR13F	33		0.10	140	0.90	2,000
NACY470M80V10X10.5TR13F	47		0.10	220	0.50	2,000
NACY680M80V12.5X14TR15F	68		0.10	500	0.24	2,000
NACY101M80V12.5X14TR15F	100		0.10	500	0.24	2,000
NACY151M80V12.5X14TR15F	150		0.10	500	0.24	2,000
NACY331M80V16X17TR15F	330		0.10	800	0.14	2,000
NACY2R2M100V6.3X6.3TR13F	2.2	100	0.07	42	2.70	1,000
NACY3R3M100V6.3X6.3TR13F	3.3		0.07	45	2.40	1,000
NACY4R7M100V6.3X6.3TR13F	4.7		0.07	45	2.40	1,000
NACY100M100V6.3X8TR13F	10		0.07	65	2.00	1,000
NACY220M100V8X10.5TR13F	22		0.08	140	0.90	2,000
NACY330M100V10X10.5TR13F	33		0.08	220	0.50	2,000
NACY470M100V12.5X14TR15F	47		0.08	500	0.24	2,000
NACY680M100V12.5X14TR15F	68		0.08	500	0.24	2,000
NACY101M100V16X17TR15F	100		0.08	800	0.14	2,000
NACY151M100V16X17TR15F	150		0.08	800	0.14	2,000

RIPPLE CURRENT

For Automotive Equipment, see part number system

FREQUENCY CORRECTION FACTOR

Frequency	≤ 120Hz	≤ 1KHz	≤ 10KHz	≤ 100KHz
Correction Factor	0.75	0.85	0.95	1.00

PART NUMBER SYSTEM

NACY 100 M 25V 4x6.3 TR 13 P WT Y F

RoHS Compliant

Wide Termination Option (8 ~ 16mm dia.)

Optional plastic reel (standard material is cardboard). See page 5 & 6

13 = 13" (330mm) Reel, 15 = 15" (380mm) Reel

Tape & Reel

Size in mm

Working Voltage

Tolerance Code M=20%

Capacitance Code in mF, first 2 digits are significant
Third digit is no. of zeros, "R" indicates decimal for values under 10μF

Series


Optional: Suitable for automotive equipment, sourced to special production and inspection at TS-16949 certified production site



Surface Mount Aluminum Electrolytic Capacitors NACY Series


DIMENSIONS (mm)

Case Size	D ϕ ± 0.5	L max.	A ± 0.2	B ± 0.2	I ± 0.2	W	P ± 0.2
4 x 6.3	4.0	6.3	4.3	4.3	1.8	0.5 ~ 0.8	1.0
5 x 6.3	5.0	6.3	5.3	5.3	2.2	0.5 ~ 0.8	1.5
6.3 x 6.3	6.3	6.3	6.6	6.6	2.5	0.5 ~ 0.8	2.2
6.3 x 8	6.3	8.0	6.6	6.6	2.5	0.5 ~ 0.8	2.2
8 X 10.5	8.0	10.5	8.3	8.3	2.9	0.7 ~ 1.1	3.2
10 x 10.5	10.0	10.5	10.3	10.3	3.2	0.7 ~ 1.4	4.6
12.5 x 14	12.5	14.0	12.8	12.8	4.5	1.0 ~ 1.4	4.6
16x17	16.0	17	16.3	16.3	5.0	1.7 ~ 2.1	7.0

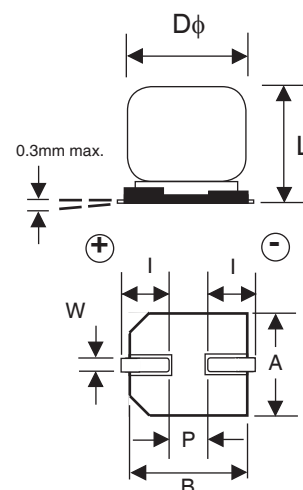

RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
4 ϕ	1.0	2.6	1.8
5 ϕ	1.4	3.0	1.8
6.3 ϕ	1.8	3.6	1.8
8 ϕ	2.8	4.1	2.1
10 ϕ	4.3	4.4	2.5






WT (WIDE TERMINATIONS) COMPONENT DIM. (mm)

Case Size	D ϕ ± 0.5	L max.	A, B ± 0.2	C ± 0.2	P	W	R	T
8x10.5	8.0	11.0	8.3	9.0	(3.2)	0.7 ~ 1.0	(0.7)	(1.3)
10x10.5	10.0	11.0	10.3	11.0	(4.6)	1.0 ~ 1.4	(0.7)	(1.3)
12.5x14	12.5	14.5	13.5	14.2	(4.6)	1.0 ~ 1.4	(2.2)	(2.4)
16x17	16.0	17.5	17.0	18.0	(7.0)	1.7 ~ 2.1	(3.0)	(2.0)

(Reference dimensions)

WT (WIDE TERMINATIONS) LAND PATTERN DIM. (mm)

Case Size	a	b	c
8x10.5	2.5	4.5	4.7
10x10.5	3.8	4.8	4.7
12.5x14	3.8	6.1	6.9
16x17	5.0	8.0	9.5

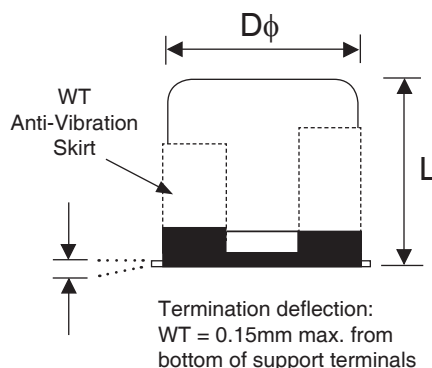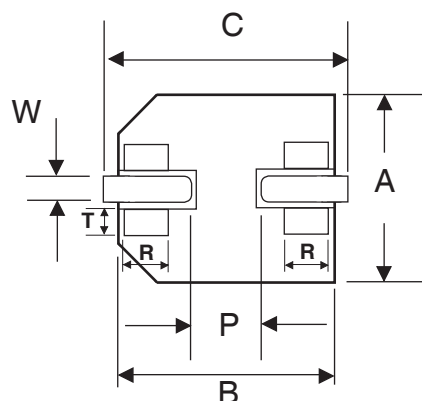


WT (Wide Terminations) Anti-Vibration Test	
Test Method	Direction: X, Y, Z axis Frequency & Duration: 5 to 2000Hz reciprocation for 20 minutes, 2 hours each direction Peak to Peak Amplitude: 5mm Peak Acceleration: 30G Sweep Type: Log
Δ Capacitance	Within $\pm 10\%$ of initial value
Tangent of Loss	$\leq$ Specified value
Leakage Current	$\leq$ Specified value

Review & Compare Reflow Soldering Heat Limits
V-chip SMT Aluminum Electrolytic Capacitors
www.niccomp.com/RSL



REFLOW TEMPERATURES AND DURATION

Voltage	Diameter	Time above 200°C	Time above 217°C	Time above 230°C	Peak Temperature
6.3 ~ 63V	4 ~ 6.3mm ϕ	70 sec. max.	60 sec. max.	40 sec. max.	250°C
	8mm ϕ	60 sec. max.	50 sec. max.	30 sec. max.	245°C
	10mm ~ 12mm ϕ	50 sec. max.	40 sec. max.	20 sec. max.	240°C
	16mm ϕ	50 sec. max.	30 sec. max.	15 sec. max.	235°C
80V ~ 100V	6.3mm ϕ	60 sec. max.	50 sec. max.	40 sec. max.	250°C
	8mm ϕ	60 sec. max.	40 sec. max.	30 sec. max.	240°C
	10mm ϕ	50 sec. max.	30 sec. max.	20 sec. max.	240°C
	12mm ϕ	50 sec. max.	30 sec. max.	20 sec. max.	235°C
	16mm ϕ	45 sec. max.	20 sec. max.	10 sec. max.	235°C

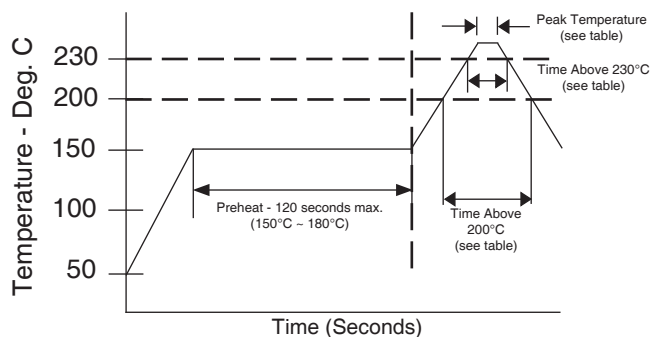


PRECAUTIONS

Please review the notes on correct use, safety and precautions found at www.niccomp.com/precautions. If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



CARRIER TAPE DIMENSIONS & REEL QTY

Case Size	A ±0.5	B ±0.5	C ±0.3	F ±0.1	P ±0.1	S ±0.1	T ±0.2	t ±0.1
4x6.3	4.7	4.7	12.0	5.5	8.0	-	6.4	0.6
5x6.3	5.7	5.7	12.0	5.5	12.0	-	6.4	0.6
6.3x6.3	7.0	7.0	16.0	7.5	12.0	-	6.5	0.6
6.3x8	7.0	7.0	16.0	7.5	12.0	-	8.2	0.6
8x10.5	8.7	8.7	24.0	11.5	16.0	-	11.1	0.6
10x10.5	10.7	10.7	24.0	11.5	16.0	-	11.2	0.6
12.5x14	13.2	13.2	32.0	14.3	24.0	28.4	14.3	0.6
16x17	17.5	17.5	44.0	20.2	28	40.4	17.3	0.6

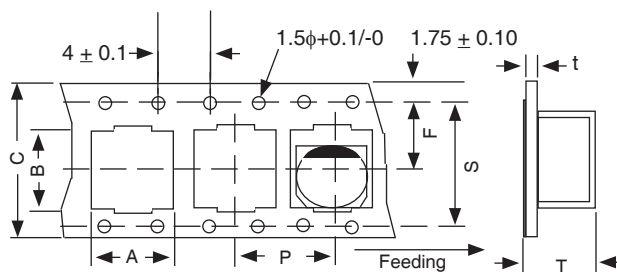


TR13 330mm (13") CARDBOARD REEL

TR15 380mm (15") CARDBOARD REEL


(See page 6 for plastic reel dimensions)

Case Size	W ±1.0	Quantity	
		TR13 (330mm)	TR15 (380mm)
4x6.3	14	1,200	2,000
5x6.3	14	800	1,000
6.3x6.3	18	800	1,000
6.3x8	18	500	900
8x10.5	26	300	500
10x10.5	26	300	500
12.5x14	34	-	250
16x17	46	-	200

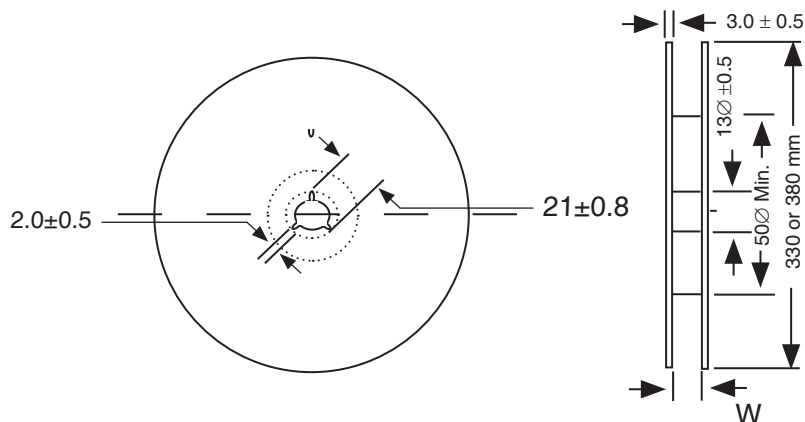

Surface Mount Aluminum Electrolytic Capacitors NACY Series

Optional V-Chip 13" (330mm) Plastic Reels (TR13P suffix)

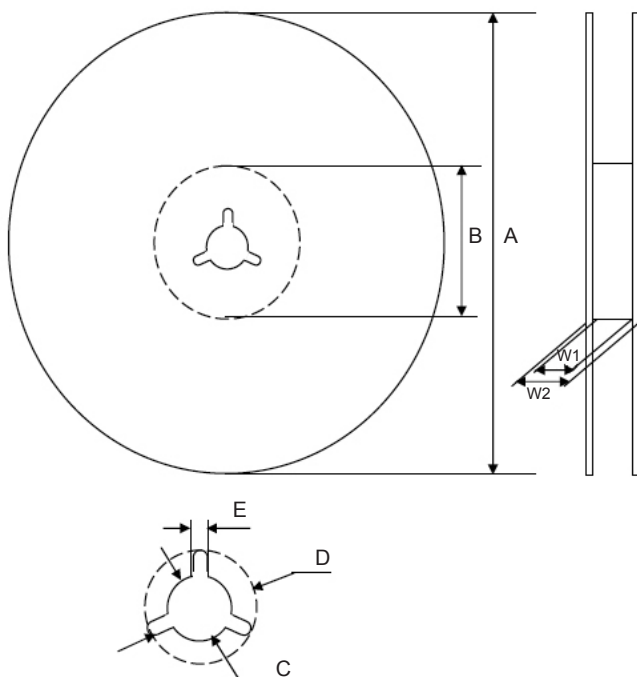


Dimensions (mm)

Case Size	Tape Width	W1	W2
4x6.3, 5x6.3	12.0	12.4 ~ 14.4	15.5 ~ 20.0
6.3x6.3, 6.3x8	16.0	16.4 ~ 18.4	19.5 ~ 24.0
8x10.5, 10x10.5	24.0	24.4 ~ 26.4	27.5 ~ 32.0

Case Size	Tape Width	A	B	C	D	E
4x6.3, 5x6.3	12.0	$\phi 330 \pm 2.0$	$\phi 50 \sim 105$	$\phi 13 \pm 0.5$	$\phi 21 \pm 1.0$	2.0 ± 0.5
6.3x6.3, 6.3x8	16.0					
8x10.5, 10x10.5	24.0					

Color
Black or Blue

Optional V-Chip 15" (380mm) Plastic Reels (TR15P suffix)

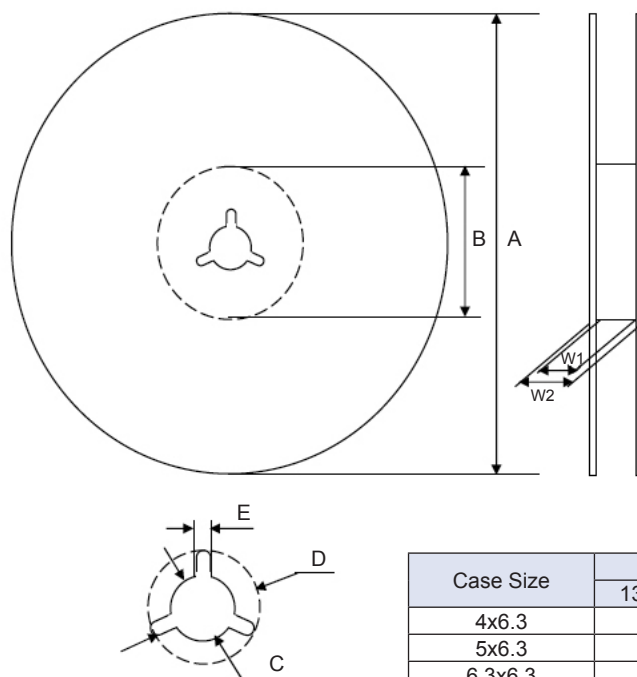

Dimensions (mm)

Case Size	Tape Width	W1	W2
4x6.3, 5x6.3	12.0	12.5 ~ 14.0	15.5 ~ 20.0
6.3x6.3, 6.3x8	16.0	16.5 ~ 18.0	19.5 ~ 24.0
8x10.5, 10x10.5	24.0	24.5 ~ 26.0	27.5 ~ 32.0
12.5x14	32.0	33.0 ~ 34.0	36.5 ~ 38.5
16x17	44.0	45.0 ~ 46.0	48.5 ~ 50.5

Case Size	Tape Width	A	B	C	D	E
4x6.3, 5x6.3	12.0	$\phi 380 \pm 2$	$\phi 80 \sim 105$	$\phi 13 \pm 0.5$	$\phi 21 \pm 1.0$	2.0 ± 0.5
6.3x6.3, 6.3x8	16.0					
8x10.5, 10x10.5	24.0					
12.5x14	32.0					
16x17	44.0					

Color
Black or Blue

Case Size	Quantity Per Reel	
	13" (330mm) Reel	15" (380mm) Reel
4x6.3	1,200 pcs	2,000 pcs
5x6.3	800 pcs	1,000 pcs
6.3x6.3	800 pcs	1,000 pcs
6.3x8	500 pcs	900 pcs
8x10.5	300 pcs	500 pcs
10x10.5	300 pcs	500 pcs
12.5x14	N/A	250 pcs
16x17	N/A	200 pcs

