


Typical Application Circuit

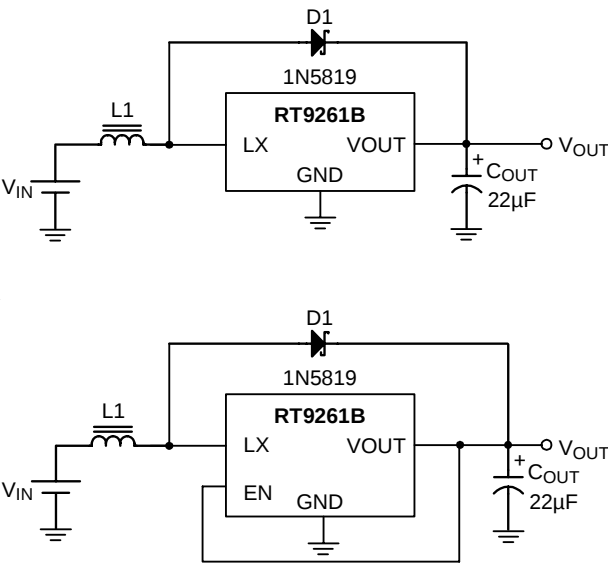


* L1 ranges from 27µH to 120µH

Functional Pin Description

Pin No.		Pin Name	Pin Function
SOT-23-5	SOT-89		
1	--	EN	Chip Enable (Active High).
2	2	VOUT	Output Voltage.
3	--	NC	No Internal Connection.
4	1	GND	Ground.
5	3	LX	Pin for Switching.

Function Block Diagram

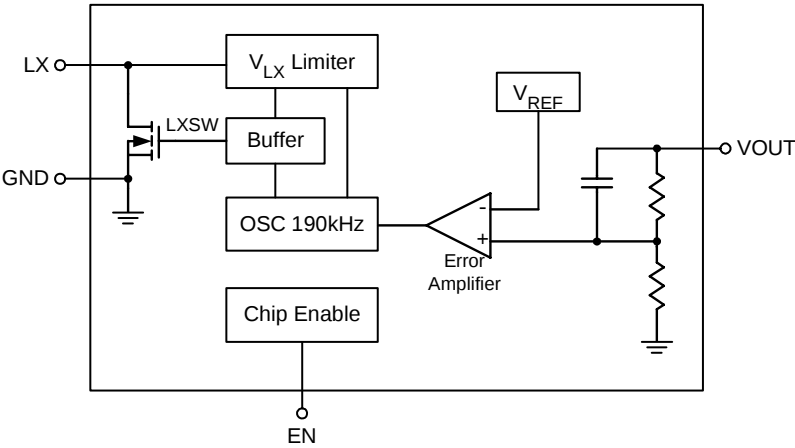

Absolute Maximum Ratings

- Output Voltage ----- 8V
- LX Pin Voltage ----- 8V
- EN Pin Voltage⁽¹⁾ ----- -0.3 to V_{OUT} +0.3V
- LX Pin Output Current ----- 400mA
- Power Dissipation, P_D @ T_A = 25° C
 - SOT-89 ----- 0.5W
 - SOT-23-5 ----- 0.25W
- Package Thermal Resistance
 - SOT-89, θ_{JC} ----- 100° C/W
 - SOT-89, θ_{JA} ----- 300° C/W
 - SOT-23-5, θ_{JA} ----- 250° C/W
- Operating Temperature Range ----- -20 to +85° C
- Storage Temperature Range ----- -65° C to 150° C
- Lead Temperature (Soldering, 10 sec.) ----- 260° C

Notes: (1) Applicable to RT9261B-xxCB

Electrical Characteristics (Refer to Figure 1)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage Accuracy	ΔV_{OUT}			-2	--	+2	%
Input Voltage	V_{IN}			--	--	7	V
Start-up Voltage	V_{ST}	$I_{OUT} = 1mA$, V_{IN} : $0 \rightarrow 2V$		--	0.8	1	V
Hold-on Voltage	V_{HO}	$I_{OUT} = 1mA$, V_{IN} : $2 \rightarrow 0V$		0.7	--	--	V
Input Current 1		V_{IN} in continuous switching	$V_{OUT} \leq 3.5V^{(1)}$	--	24	36	μA
			$3.5V < V_{OUT} \leq 5V^{(2)}$	--	36	45	
Input Current 2 ^{(1) (2)}		V_{OUT} in switch off condition		--	6.5	10	μA
Input Current 3 (guaranteed by I_1 and I_2)		V_{IN} in no load	$V_{OUT} \leq 3.5V^{(1)}$	--	18	36	μA
			$3.5V < V_{OUT} \leq 5V^{(2)}$	--	20	45	
LX Switching Current	$I_{SWITCHING}$	$V_{LX} = 0.4V$	$V_{OUT} \leq 3.5V^{(1)}$	120	--	--	mA
			$3.5V < V_{OUT} \leq 5V^{(2)}$	160	--	--	
LX Leakage Current	$I_{LEAKAGE}$	$V_{LX} = 6V$		--	--	0.5	μA
Maximum Oscillator Frequency	F_{MAX}	$V_{OUT} = 2.5V$ to $5V$		140	190	240	kHz
		$V_{OUT} = 1.5V$ to $2.4V$		140	190	320	kHz
Oscillator Duty Cycle	D_{OSC}	On (V_{LX} "L") side	$V_{OUT} = 2.5V$ to $5V$	65	75	85	%
			$V_{OUT} = 1.5V$ to $2.4V$	60	70	80	%
Efficiency				--	80	--	%
V_{LX} Voltage Limit		LX switch on		0.65	0.8	1.0	V

Notes:

(1) V_{IN} = 1.8V, V_{SS} = 0V, I_{OUT} = 1mA, T_{opt} = 25° C, and use External Circuit of Typical Application

(2) V_{IN} = 3V, V_{SS} = 0V, I_{OUT} = 1mA, T_{opt} = 25° C, and External Circuit of Typical Application







Electrical Characteristics (Refer to Figure 2)







Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage Accuracy	ΔV_{OUT}			-2	--	+2	%
Input Voltage	V_{IN}			--	--	7	V
Start-up Voltage	V_{ST}	$I_{OUT} = 1mA, V_{IN}: 0 \rightarrow 2V$		--	0.8	1	V
Hold-on Voltage	V_{HO}	$I_{OUT} = 1mA, V_{IN}: 2 \rightarrow 0V$		0.7	--	--	V
Efficiency				--	80	--	%
Input Current 1		V_{IN} in continuous switching	$V_{OUT} \leq 3.5V^{(1)}$	--	24	36	μA
			$3.5V < V_{OUT} \leq 5V^{(2)}$	--	36	45	
Input Current 2 ^{(1) (2)}		V_{OUT} in switch off condition		--	6.5	10	μA
Input Current 3 (guaranteed by I_1 and I_2)		V_{IN} in no load	$V_{OUT} \leq 3.5V^{(1)}$	--	18	36	μA
			$3.5V < V_{OUT} \leq 5V^{(2)}$	--	20	45	
LX Switching Current	$I_{SWITCHING}$	$V_{LX} = 0.4V$	$V_{OUT} \leq 3.5V^{(1)}$	120	--	--	mA
			$3.5V < V_{OUT} \leq 5V^{(2)}$	160	--	--	
LX Leakage Current	$I_{LEAKAGE}$	$V_{LX} = 6V$		--	--	0.5	μA
EN “H” Level		$V_{IN} = V_{OUT} * 0.9$		0.4 x V_{OUT}	--	--	V
EN “L” Level		$V_{IN} = V_{OUT} * 0.9$		--	--	0.2	V
EN “H” Input Current		$EN = V_{OUT}$		--	--	0.5	μA
EN “ L” Input Current		$EN = 0V$		-0.5	--	--	μA
Maximum Oscillator Frequency	F_{MAX}	$V_{OUT} = 2.5V$ to $5V$		140	190	240	kHz
		$V_{OUT} = 1.5V$ to $2.4V$		140	190	320	
Oscillator Duty Cycle	D_{OSC}	On (V_{LX} “L”) side	$V_{OUT} = 2.5V$ to $5V$	65	75	85	%
			$V_{OUT} = 1.5V$ to $2.4V$	60	70	80	%
V_{LX} Voltage Limit		LX switch on		0.65	0.8	1.0	V

Notes:


(1) $V_{IN} = 1.8V$, $V_{SS} = 0V$, $I_{OUT} = 1mA$, $T_{opt} = 25^\circ C$, and use External Circuit of Typical Application(2) $V_{IN} = 3V$, $V_{SS} = 0V$, $I_{OUT} = 1mA$, $T_{opt} = 25^\circ C$, and External Circuit of Typical Application

Typical Operating Characteristics

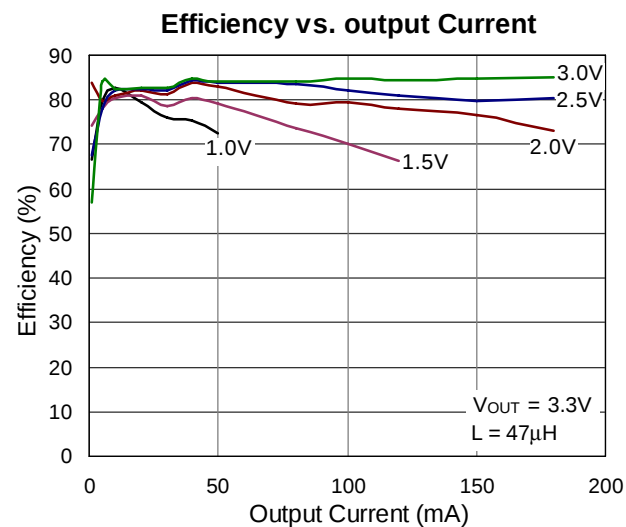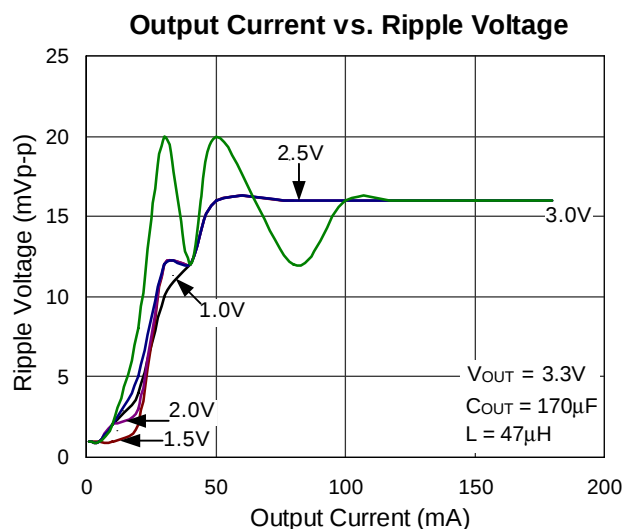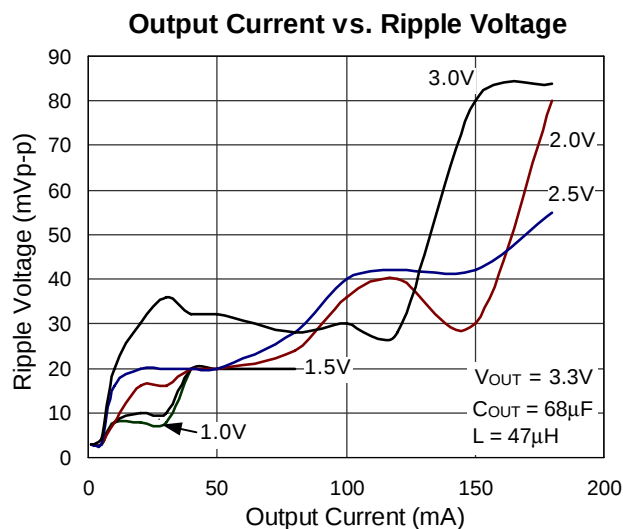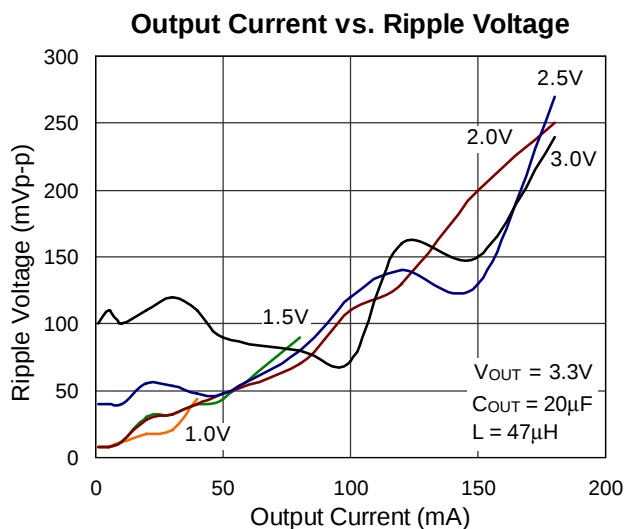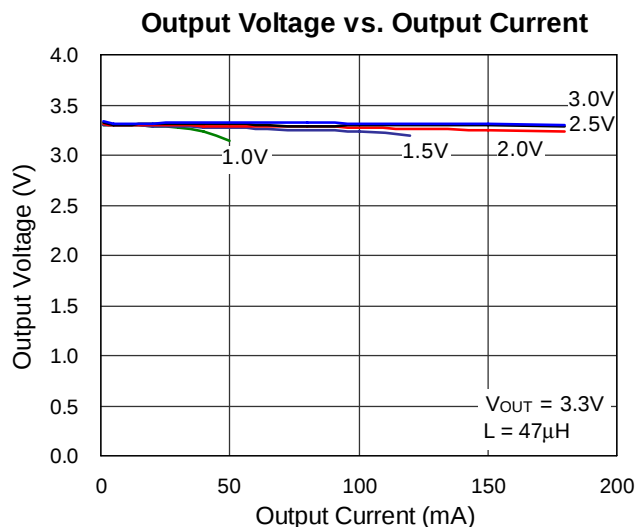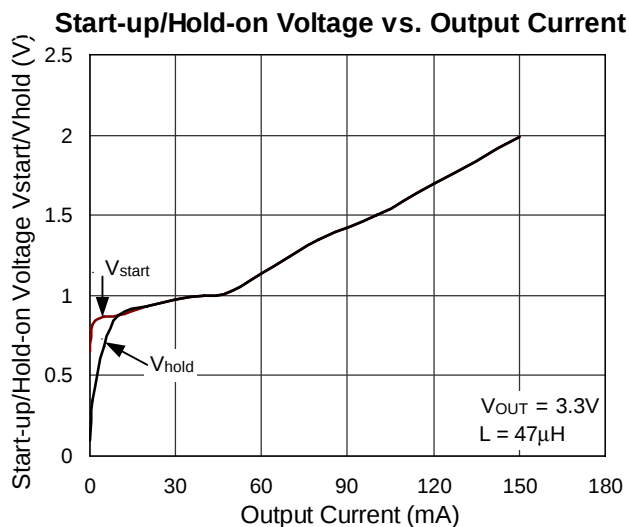

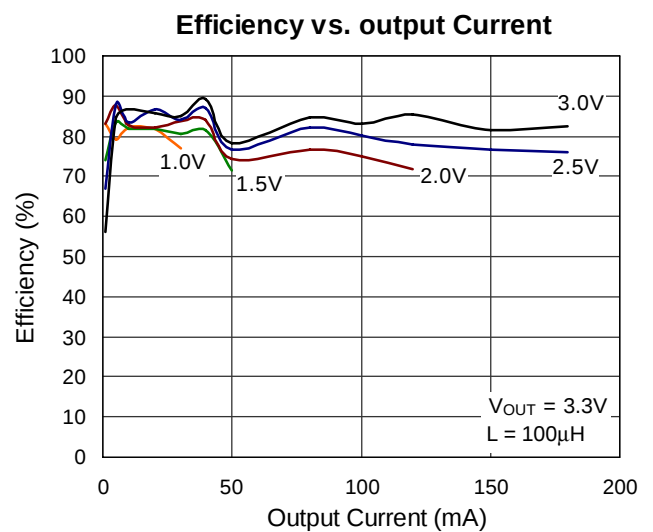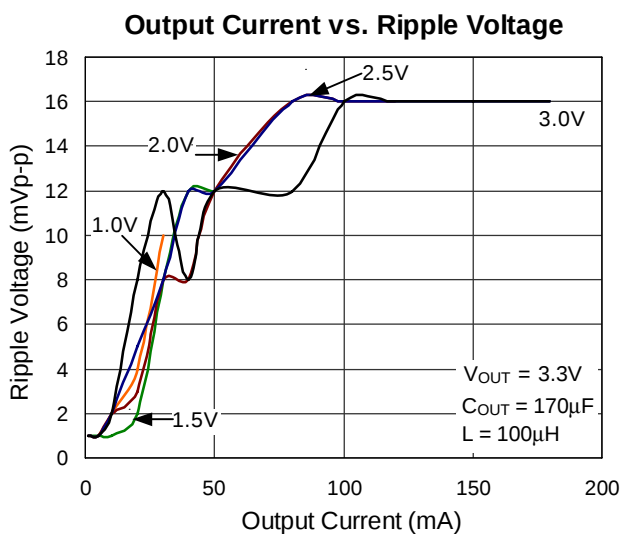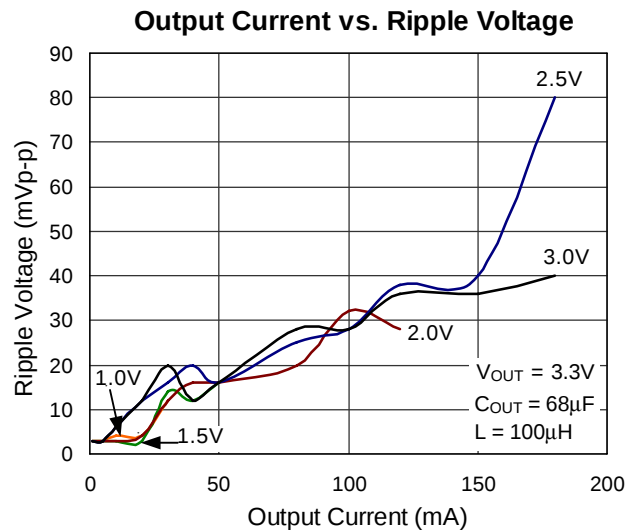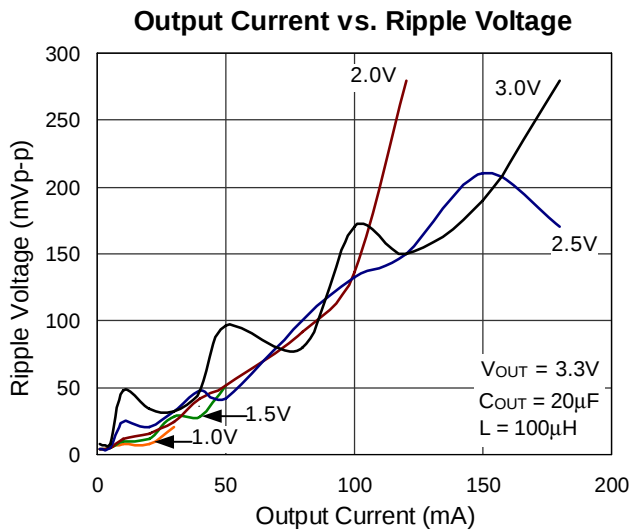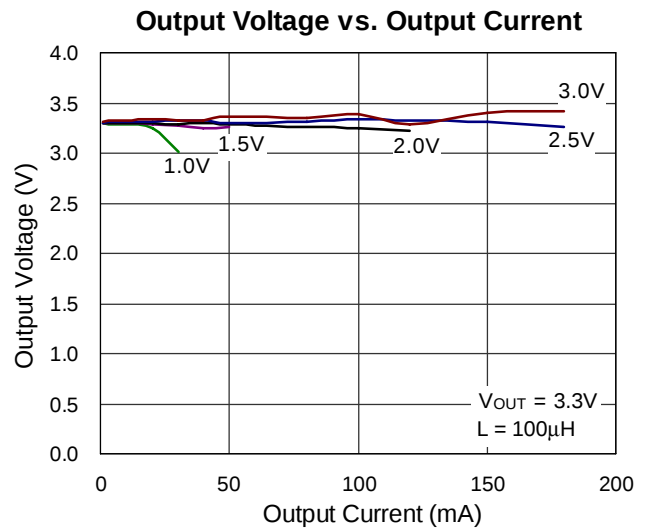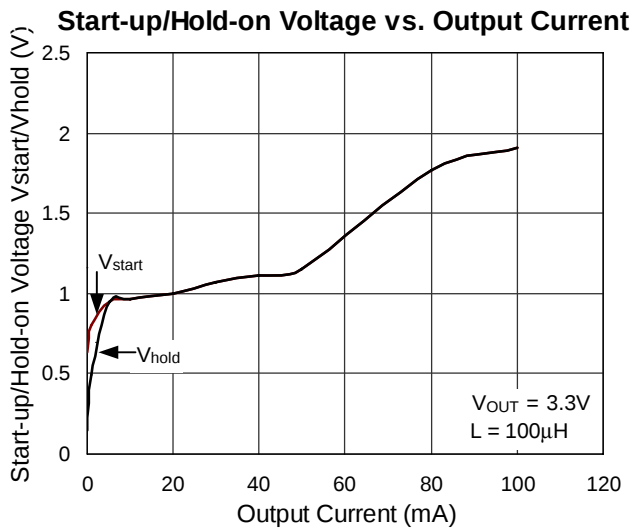


Outline Dimension

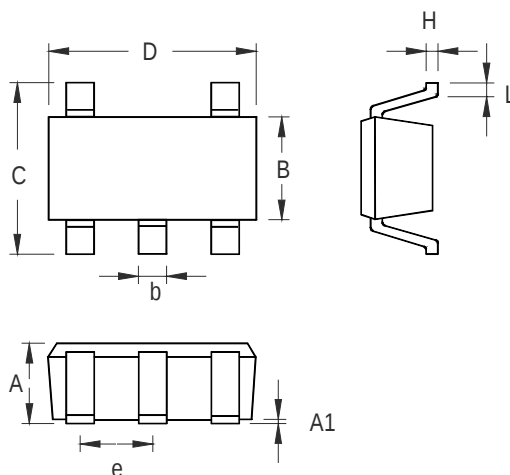

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.356	0.559	0.014	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	0.838	1.041	0.033	0.041
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23-5 Surface Mount Package

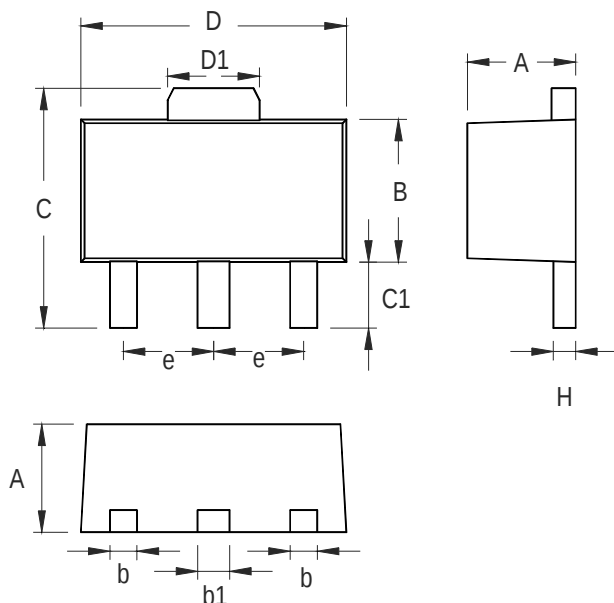

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.397	1.600	0.055	0.063
b	0.356	0.483	0.014	0.019
B	2.388	2.591	0.094	0.102
b1	0.406	0.533	0.016	0.021
C	3.937	4.242	0.155	0.167
C1	0.787	1.194	0.031	0.047
D	4.394	4.597	0.173	0.181
D1	1.397	1.753	0.055	0.069
e	1.448	1.549	0.057	0.061
H	0.356	0.432	0.014	0.017

3-Lead SOT-89 Surface Mount

Richtek Technology Corporation

Headquarter

5F, No. 20, Taiyuen Street, Chupei City

Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789 Fax: (8863)5526611

Richtek Technology Corporation

Taipei Office (Marketing)

5F, No. 95, Minchiuan Road, Hsintien City

Taipei County, Taiwan, R.O.C.

Tel: (8862)86672399 Fax: (8862)86672377

Email: marketing@richtek.com

Information that is provided by Richtek Technology Corporation is believed to be accurate and reliable. Richtek reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. No third party intellectual property infringement of the applications should be guaranteed by users when integrating Richtek products into any application. No legal responsibility for any said applications is assumed by Richtek.