



Electrical

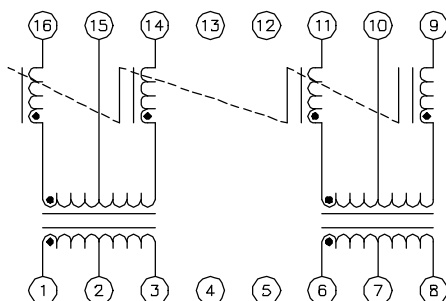


SCHEMATIC

ELECTRICAL SPECIFICATIONS @ 25°C

Turns Ratio (1-2-3 TO 16-15-14)	: 1CT : 1CT $\pm$ 5%
Turns Ratio (6-7-8 TO 11-10-9)	: 1CT : 2CT $\pm$ 5%
PHASING	: 1, 16 AND 11, 6 IN-PHASE
OCL (1-3)	: 120 μ H MIN @ 10mV, 10KHz
OCL (6-8)	: 20 μ H MIN @ 10 mV, 10KHz
OCL (COMMON MODE INDUCTOR) (15 TO 14 AND 16 SHORTED)	: 18-45 μ H @ .008VRMS MAX, 100KHz
LL (1-3, SHORT 16-14)	: .40 μ H MAX @ 1MHz MIN, 1V
LL (6-8 SHORT 11-9)	: .2 μ H MAX @ 1MHz MIN, 1V
C _{ww} (1-3 TO 14-16)	: 9pF MAX, 100KHz, 1V
C _{ww} (6-8 TO 11-9)	: 7pF MAX, 100KHz, 1V
DCR (1-3, 14-16, 6-8 AND 9-11)	: 0.9 Ω MAX
HIPOT (1-3 TO 14-16 AND 9-11 TO 6-8)	: 1500VRMS, 1MIN
Z _p (COMMON MODE INDUCTOR) (14 AND 16 SHORTED) TO 15, OR (9 AND 11 SHORTED) TO 10	: PER GRAPH

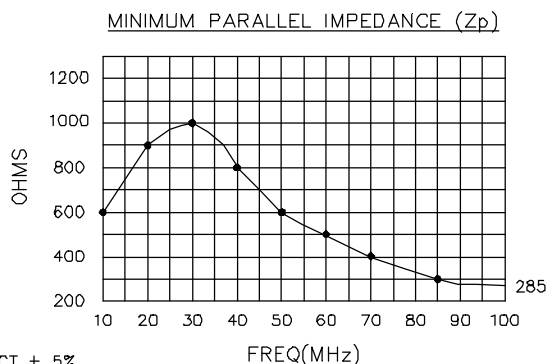

Mechanical

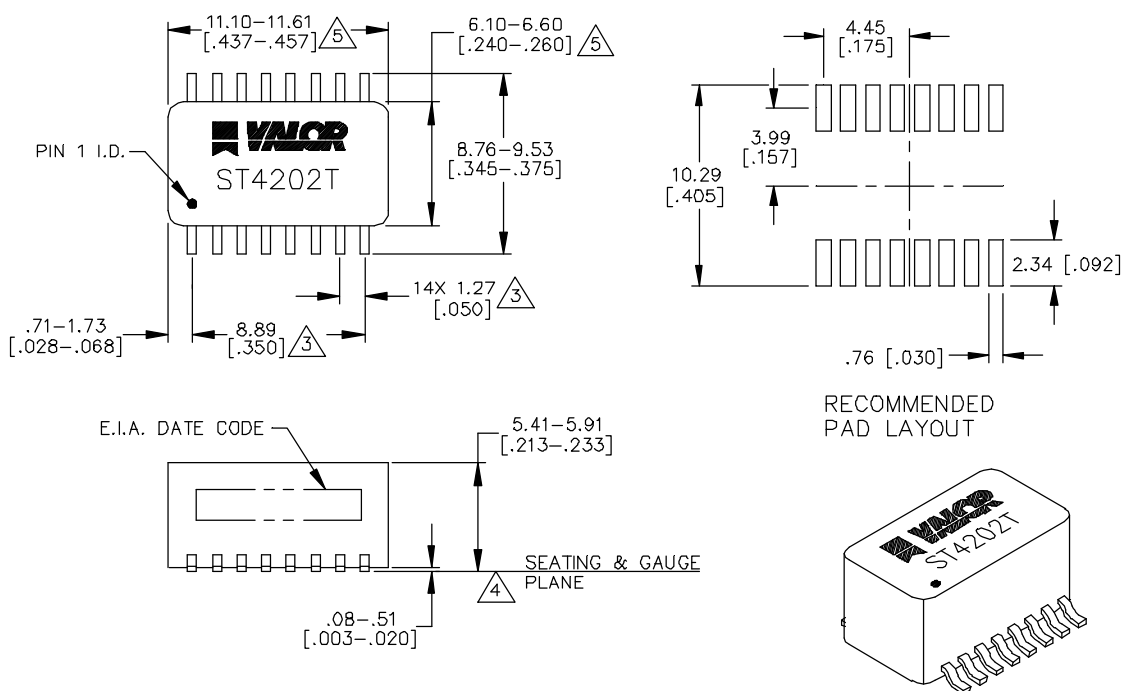

WEBSITE www.valorinc.com E-MAIL marketing@valorinc.com

NORTH AMERICA
tel 1-800-31 VALOR
fax 619-537-2525

ASIA/PACIFIC
tel +852-2953-1000
fax +852-2953-1333

EUROPE
tel +44-1727-824 875
fax +44-1727-824 898