

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1005
Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
Insulation Range Φ[mm]: 1,60 - 1,88
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15366021		1,74	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

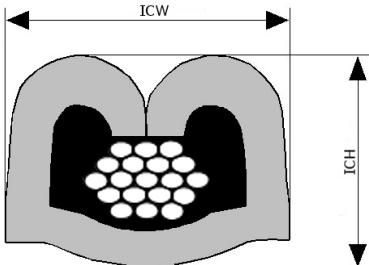

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*


Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15366060		2,15	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR



Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1021
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,74 - 0,80
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,35 / 15366021		0,77	50	1,05	0,05	1,75	0,10	3,10	0,10	3,50	0,10

Cable type code legend:

1021:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

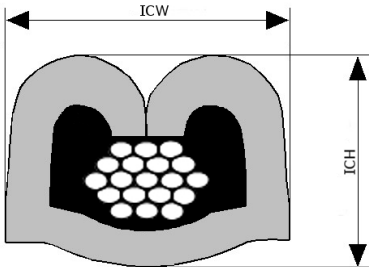

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,47 - 1,85
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35 / 15366021		1,55	55	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10
1025 0,50 / 15366021		1,73	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1025:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

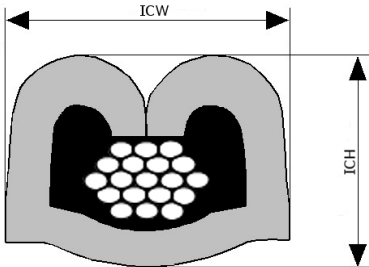

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1026
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,50 / 15366060		2,15	75	1,10	0,05	1,80	0,10	3,50	0,10	3,50	0,10

Cable type code legend:

1026:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

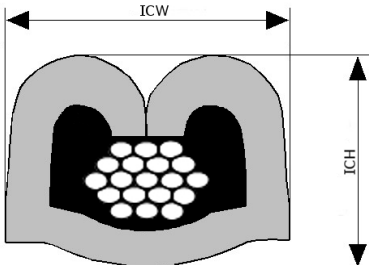

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1035
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,50 / 15366060		2,15	80	1,22	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1035:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: REGULAR

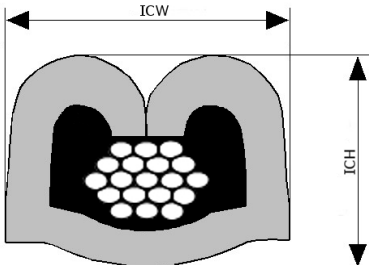

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1047
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,75
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15366021		1,58	70	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10

Cable type code legend:

1047:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN

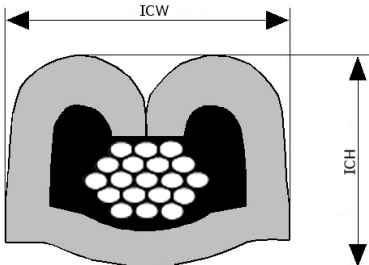

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1055
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,45 - 1,75
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1055 0,35 / 15366021		1,60	50	1,05	0,05	1,80	0,10	3,30	0,10	3,40	0,10

Cable type code legend:

1055:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: THIN

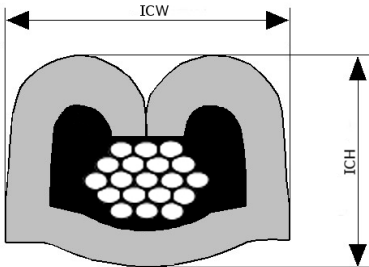

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1056
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,45 - 1,75
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,35 / 15366021		1,60	50	1,05	0,05	1,80	0,10	3,30	0,10	3,50	0,10

Cable type code legend:

1056:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NI
Insul. Material: FLUORPOLYM, PTFE
Insul. Wall Designator: THIN

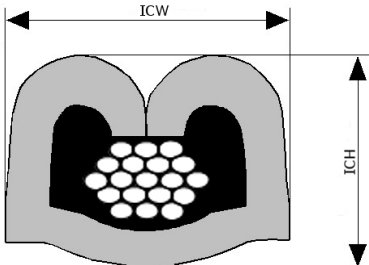

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1091
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,75 - 0,77
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1091 0,35 / 15366021		0,76	50	1,05	0,05	1,75	0,10	3,10	0,10	3,50	0,10

Cable type code legend:

1091:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

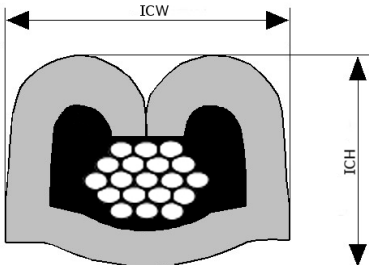

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1092
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1092 0,50 / 15366060		2,15	80	1,22	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1092:

Industry Designator: SAE
Conductor Material: ALLOY
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: REGULAR

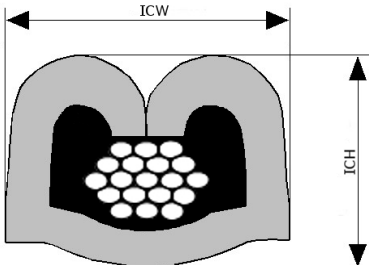

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1106
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,20
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1106 0,50 / 15366060		2,10	80	1,22	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

1106:

Industry Designator: SAE
Conductor Material: ALLOY
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: REGULAR

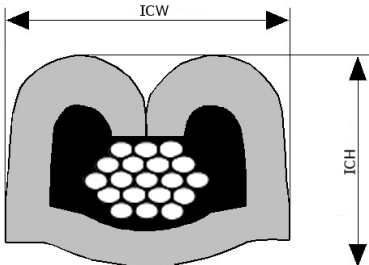

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2006
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,35
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 0,50 / 15366060		2,18	75	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

2006:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: EPR, PVC, XLPE
Insul. Wall Designator: REGULAR

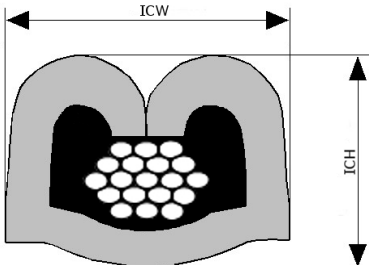

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,20 - 1,70
Seal(s): 12191226 | 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 / 12191226		1,34	50	1,15	0,05	1,65	0,10	3,30	0,10	3,50	0,10
2010 0,35 / 15366021		1,34	50	1,15	0,05	1,65	0,10	3,30	0,10	3,50	0,10
2010 0,50 / 12191226		1,50	80	1,25	0,05	1,70	0,10	3,40	0,10	3,50	0,10
2010 0,50 / 15366021		1,50	80	1,25	0,05	1,70	0,10	3,40	0,10	3,50	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

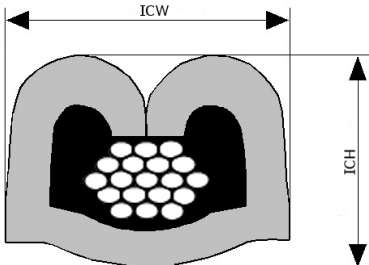

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50 / 15366060		2,15	75	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR

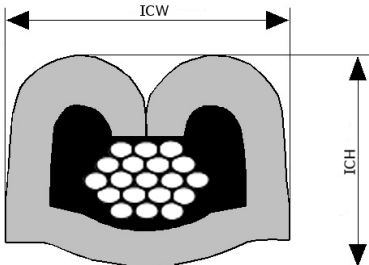

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2016
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,62 - 0,67
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2016 0,35 / 15366021		0,65	50	1,05	0,05	1,90	0,10	3,00	0,10	3,70	0,10

Cable type code legend:

2016: DIN-CORE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

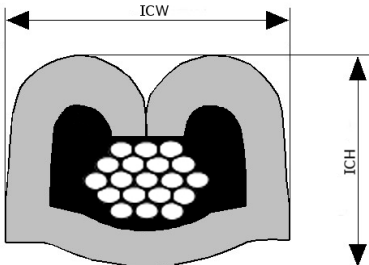

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2017
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,10 - 1,70
Seal(s): 15366021 | 12191152

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,35 / 15366021		1,25	50	1,15	0,05	1,65	0,10	2,90	0,10	3,50	0,10
2017 0,50 / 12191152		1,50	80	1,25	0,05	1,70	0,10	3,10	0,10	3,50	0,10
2017 0,50 / 15366021		1,50	80	1,25	0,05	1,70	0,10	3,10	0,10	3,50	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PA, PP, PVC, XLPE
Insul. Wall Designator: THIN

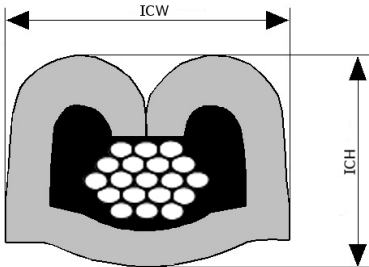

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2039
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,03 - 1,24
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2039 0,35 / 15366021		1,14	55	1,05	0,05	1,75	0,10	2,70	0,10	3,50	0,10

Cable type code legend:

2039:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PPE, PVC
Insul. Wall Designator: ULTRA THIN

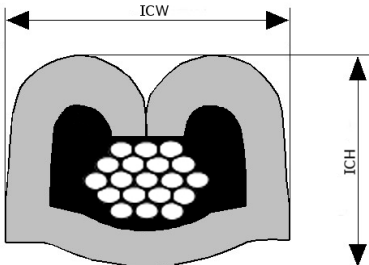

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2053
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,20 - 1,60
Seal(s): 12191226

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 0,35 / 12191226		1,30	50	1,15	0,05	1,70	0,10	2,80	0,10	3,60	0,10
2053 0,50 / 12191226		1,50	80	1,25	0,05	1,70	0,10	2,90	0,10	3,60	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, X-POLY
Insul. Wall Designator: ID

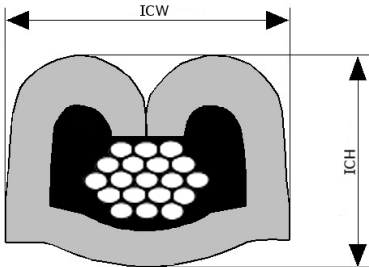

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2054
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,25 - 1,70
Seal(s): 12191226 | 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 0,35 / 12191226		1,33	50	1,15	0,05	1,70	0,10	2,90	0,10	3,50	0,10
2054 0,50 / 12191226		1,55	80	1,25	0,05	1,70	0,10	3,10	0,10	3,50	0,10
2054 0,50 / 15366021		1,55	80	1,15	0,05	1,70	0,10	3,30	0,10	3,60	0,10

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, PVC, X-POLY
Insul. Wall Designator: IR

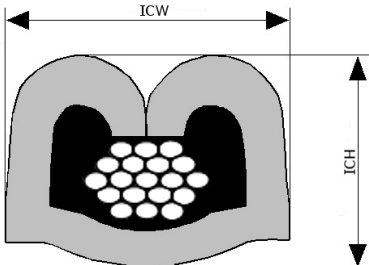

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 2083
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,20 - 1,70
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 0,35 / 15366021		1,30	50	1,05	0,05	1,80	0,10	2,90	0,10	3,40	0,10
2083 0,50 / 15366021		1,55	75	1,10	0,05	1,80	0,10	3,10	0,10	3,40	0,10

Cable type code legend:

2083:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC (YW)
Insul. Wall Designator: THIN

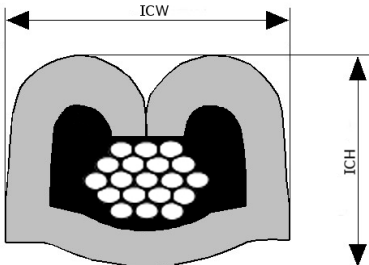

Terminal Part Number: 12191818

Surface Plating: SN

Material Thickness [mm]: 0,30

Cross Section [mm²]: 0,50

Cable Type codes: 3002

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,80 - 2,30

Seal(s): 15366021 | 15366060

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3002 0,50 / 15366021		2,05	75	1,10	0,05	1,75	0,10	3,60	0,10	3,50	0,10
3002 0,50 / 15366060		2,05	75	1,10	0,05	1,75	0,10	3,40	0,10	3,40	0,10

Cable type code legend:

3002:



Industry Designator: JIS/JA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPVC

Insul. Wall Designator: REGULAR

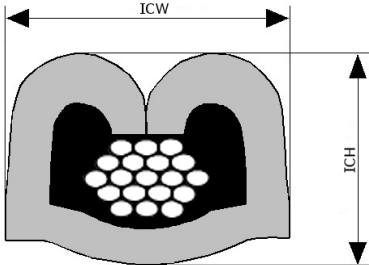

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,30 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,30 - 1,70
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30 / 15366021		1,40	50	1,05	0,05	1,75	0,10	3,20	0,10	3,40	0,10
3004 0,50 / 15366021		1,60	88	1,10	0,05	1,75	0,10	3,40	0,10	3,40	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN

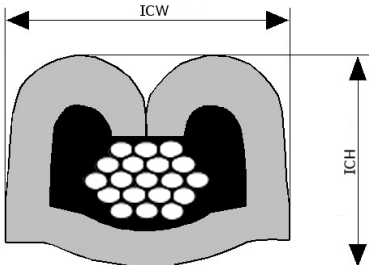

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,60
Seal(s): 15366021

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,50 / 15366021		1,50	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

8000:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN

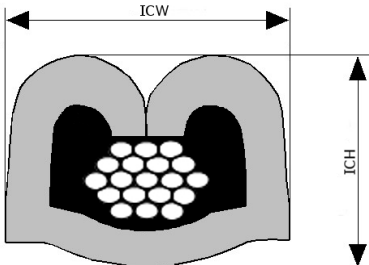

Terminal Part Number: 12191818
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 9000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,90 - 2,05
Seal(s): 15366060

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9000 0,50 / 15366060		1,98	80	1,10	0,05	1,80	0,10	3,50	0,10	3,40	0,10

Cable type code legend:

9000:

Industry Designator: MISC
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVDF
Insul. Wall Designator: MIX

