



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER ECO-19-002730	02AUG2019	A.S	H.L

D

C

B


A

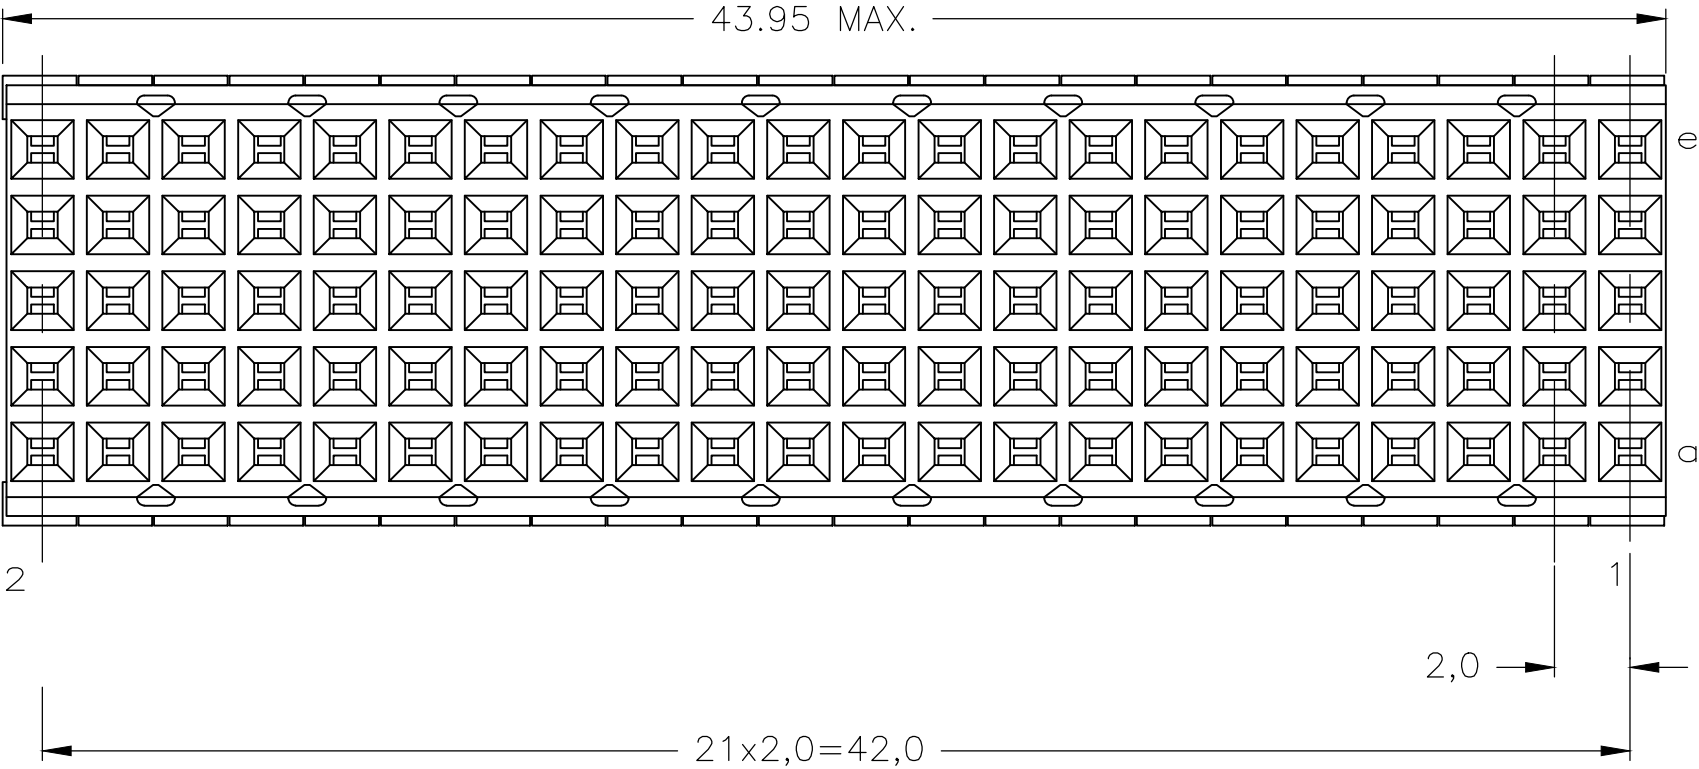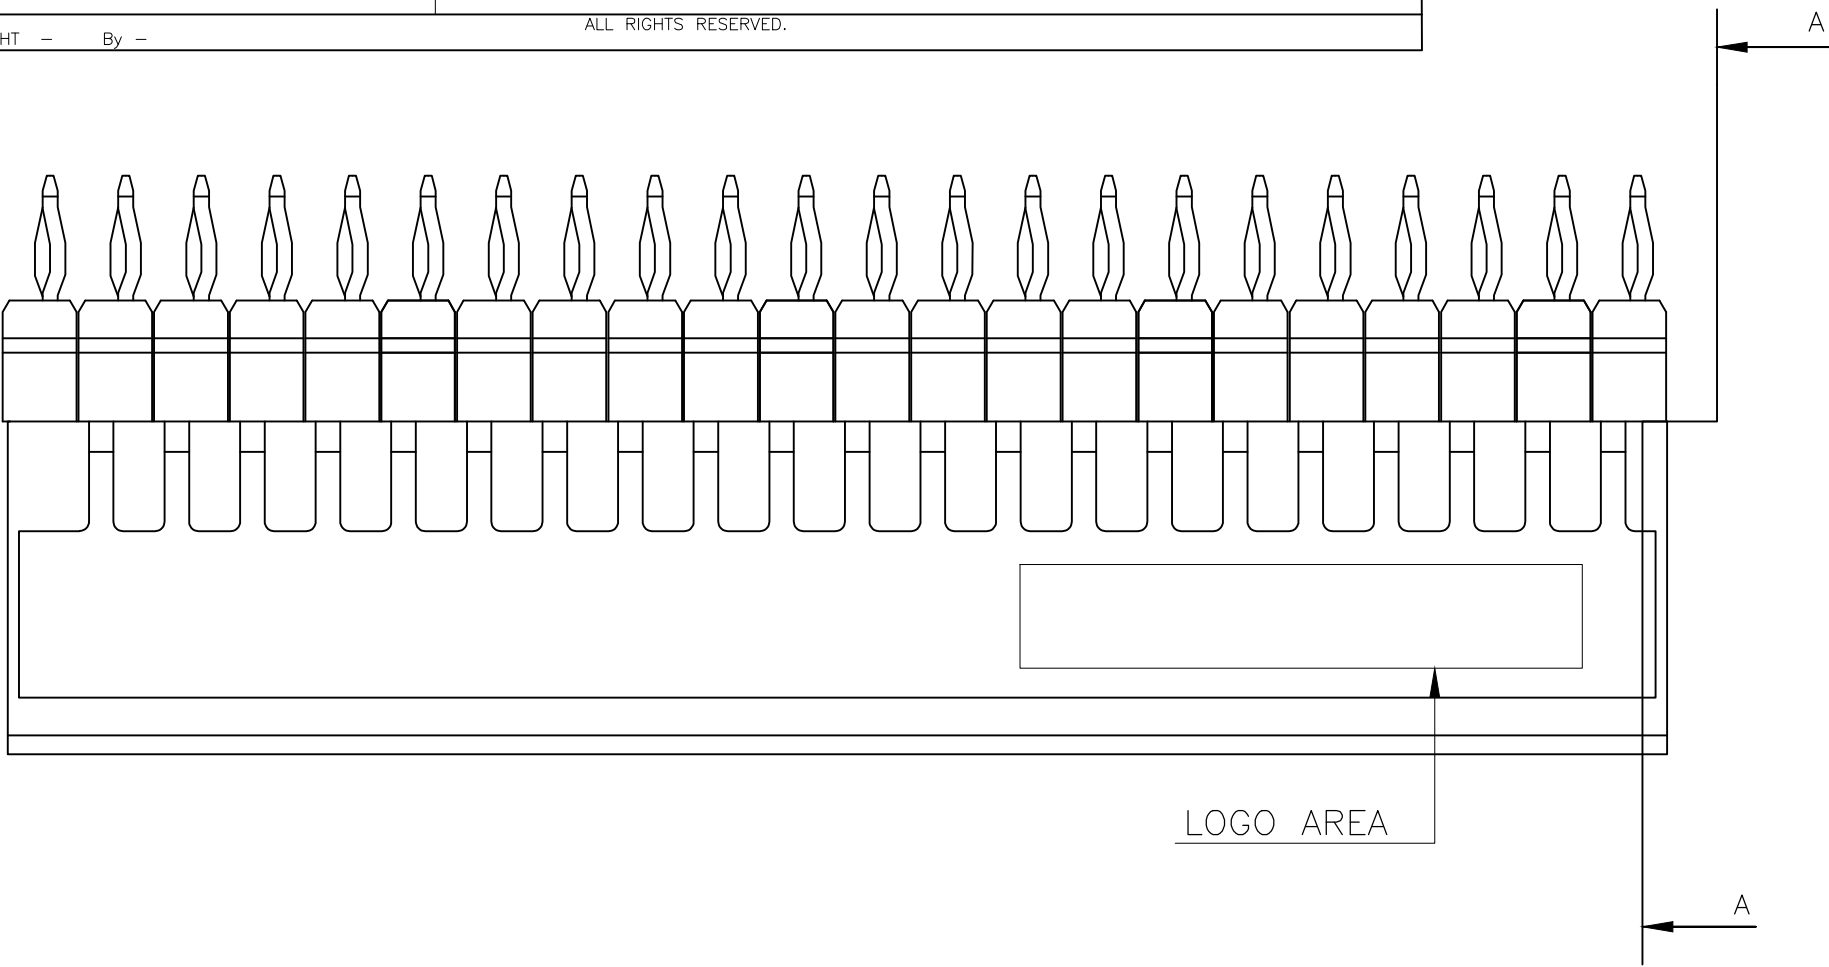

VIEW M


NOTES:

- MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (110 HOLES).
- HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


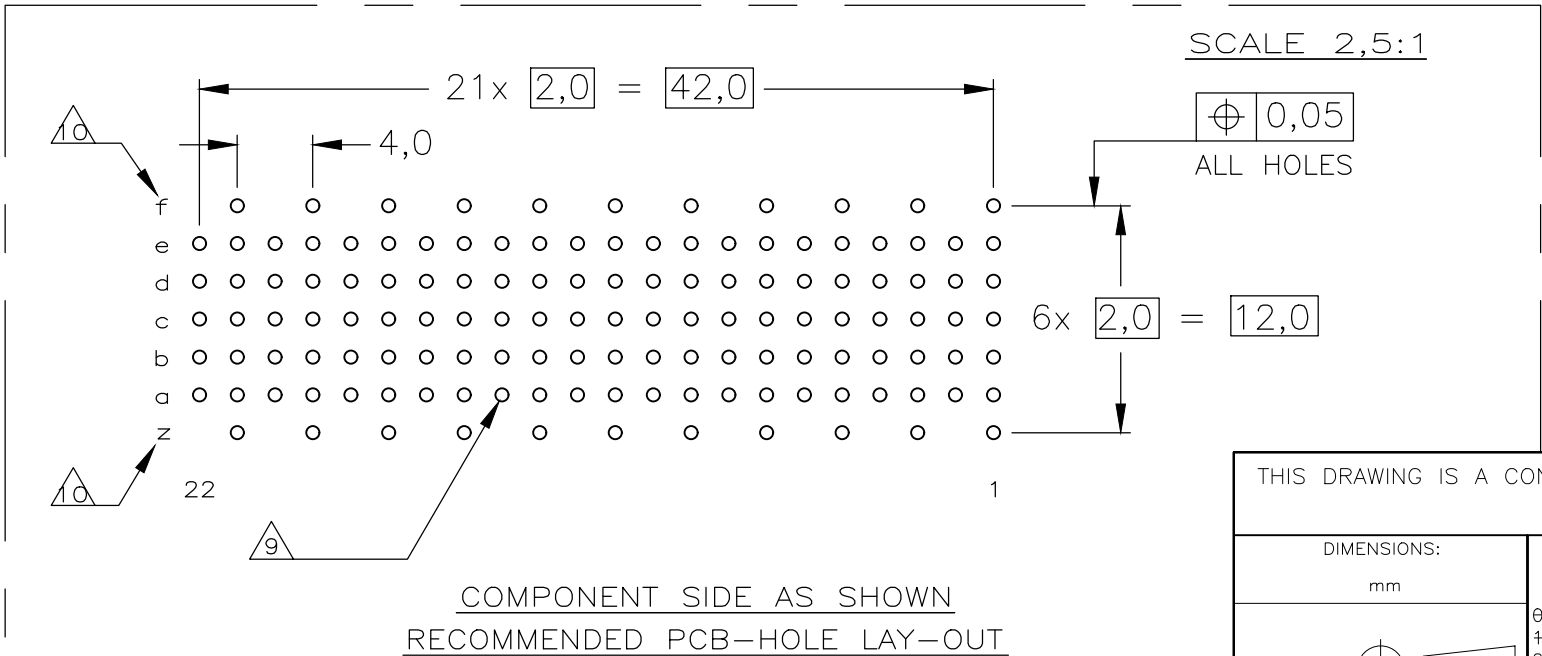


COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

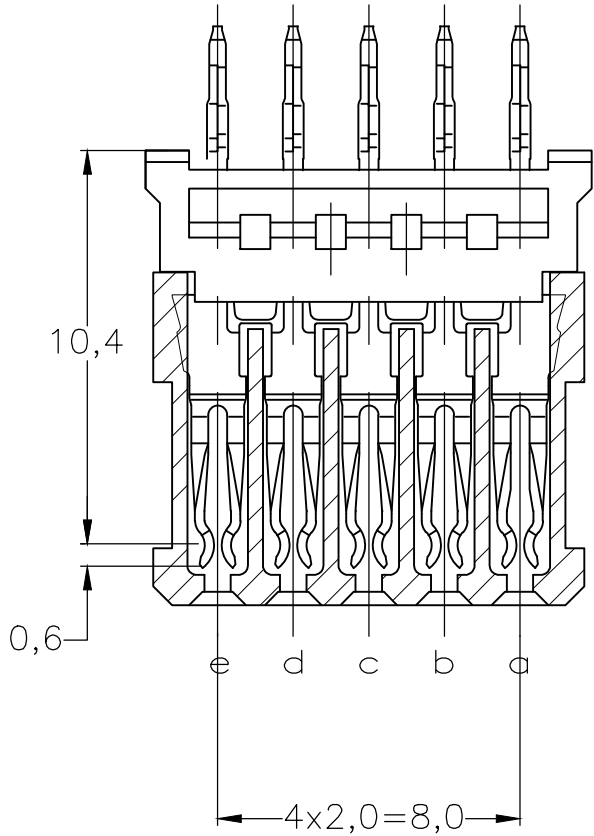

SECTION A-A

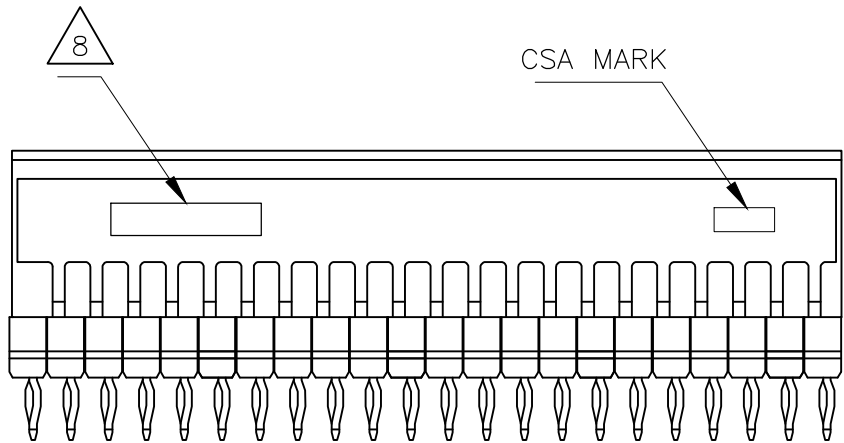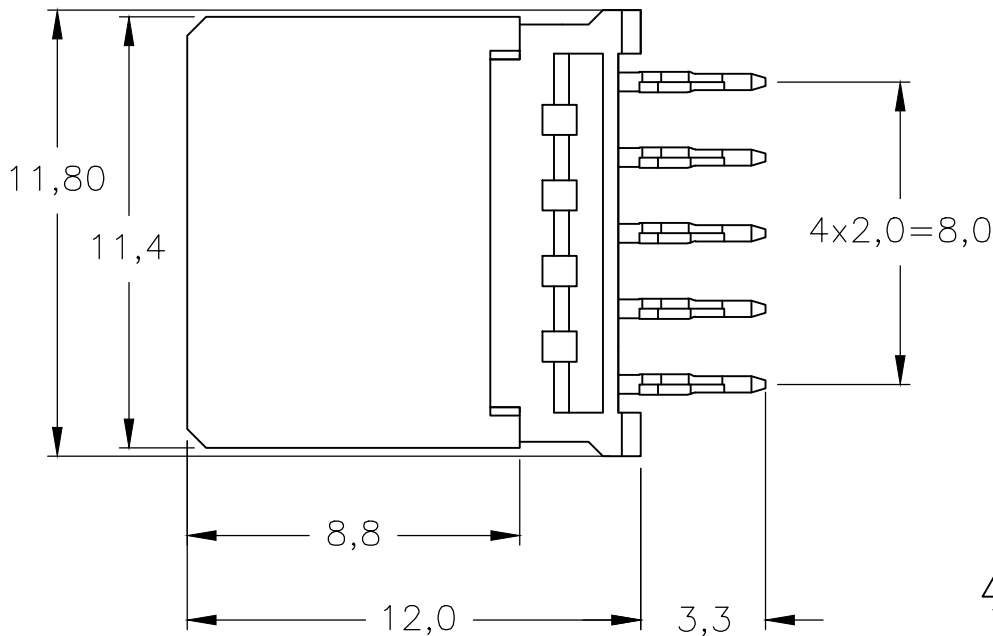

VIEW M
SCALED

OBSOLETE	11	267	1	1-5352268-9	
	257	1	-5352268-9		
	24	1	-5352268-4		
	23	1	5352268-1		
FINISH		MATERIAL	PARTNUMBER		
MENT.	DWN K.N.KIRAN 23AUG2004	TE Connectivity Z-PACK 2mm HM TYPE B 110 POS. 22 COLUMNS VERTICAL FEMALE CONNECTOR ASSEMBLY			
CHK B.MOOIJ 27OCT2004					
APVD B.MOOIJ 27OCT2004					
PRODUCT SPEC					
±0.2	108-19082	NAME			
APPLICATION SPEC					
114-19029	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
WEIGHT	0.000000	A2	00779	C-5352268	—
CUSTOMER DRAWING			SCALE	SHEET	REV
			5:1	1 of 1	F