

ATO28XXT Series

International
IR Rectifier

Specifications

$T_{CASE} = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{IN} = +28\text{V} \pm 5\%$ unless otherwise specified

Absolute Maximum Ratings		
Input voltage	-0.5V to +50VDC	
Power Output	Internally limited, 17.5W typical	
Soldering temperature	300°C for 10 seconds	
Temperature Range ⁶	Operating case temperature	-55°C to +115°C
	Storage case temperature	-65°C to +135°C

TEST	SYMBOL	Condition -55°C ≤ T _C ≤ +85°C, V _{IN} = 28 VDC ±5%, C _L =0 unless otherwise specified		ATO2812T		ATO2815T		Units
				Min	Max	Min	Max	
STATIC CHARACTERISTICS								
OUTPUT Voltage ¹	V _{OUT}	I _{OUT} = 0 (main) I _{OUT} = 0 (dual) ¹	TC = 25°C Over Temp TC = 25°C Over Temp	4.95 4.90 ±11.88 ±11.76	5.05 5.10 ±12.12 ±12.24	4.95 4.90 ±14.85 ±14.70	5.05 5.10 ±15.15 ±15.30	V V V V
Current ^{1,2,3}	I _{OUT}	V _{IN} = 16, 28, and 40 VDC (main) V _{IN} = 16, 28, and 40 VDC (dual) ¹ V _{IN} = 16, 28, and 40 VDC (dual)		0.0 0.0	2000 ±208	0.0 0.0	2000 ±167	mA mA
Ripple Voltage ^{1,4}	V _{RIP}	BW = DC to 2 MHz (main) V _{IN} = 16, 28, and 40 VDC BW = DC to 2 MHz (dual))			80		80	mVp-p
Power ^{1,2,3}	P _{OUT}	V _{IN} = 16, 28, and 40 VDC (main) (+dual) (-dual) (total)		10 2.5 2.5 15		10 2.5 2.5 15		W W W W
REGULATION								
Line ^{1,3}	VR _{LINE}	V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, 1000, 2000mA (main) V _{IN} = 16, 28, and 40 VDC (dual) I _{OUT} = 0, ±84, ±167mA (dual)	TC = 25°C Over Temp		25 ±30		25 ±35	mV
Load ^{1,3}	VR _{LOAD}	V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, 1000, 2000mA (main) V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, ±84, ±167mA (dual)			±60		±75	mV
INPUT								
Current	I _{IN}	I _{OUT} = 0, Inhibit (pin 8) Tied to input return (pin 10)			15		15	mA
Ripple Current ⁴	I _{RIP}	I _{OUT} = 0, inhibit (pin 2) = open I _{OUT} = 2000 mA (main) I _{OUT} = ±167mA (dual) BW = DC to 2MHz			40 50		40 50	mA mA
EFFICIENCY	E _{FF}	I _{OUT} = 2000mA (main) I _{OUT} = ±167mA (dual)	TC = 25°C	76		76		%
ISOLATION	ISO	Input to output or any pin to case (except pin 7) at 500 VDC	TC = 25°C	100		100		MΩ
Load Fault Power Dissipation ³	P _D	Overload Short Circuit	TC = 25°C		8.0 6.0		8.0 6.0	W
Switching Frequency	F _S	I _{OUT} = 2000mA (main) I _{OUT} = ±167mA (dual)		225	275	225	275	KHz
Inhibit Open Circuit Voltage	V _{OI}			9.0	13	9.0	13	V

Notes to Specifications

1. Tested at each output.
2. Parameter guaranteed by line and load regulation tests.
3. At least 20 percent of the total output power should be taken from the (+5V) main output.
4. Bandwidth guaranteed by design. Tested for 20KHz to 2.0MHz.
5. An overload is that condition with a load in excess of the rated load but less than that necessary to trigger the short circuit protection and is the condition of maximum power dissipation.
6. Above 85°C case temperature, derate output power linearly to 0 at 115°C case.

International
IOR Rectifier
Specifications

ATO28XXT Series

$T_{CASE} = -55^{\circ}\text{C}$ to $+105^{\circ}\text{C}$, $V_{IN} = +28\text{V} \pm 5\%$ unless otherwise specified

Absolute Maximum Ratings		
Input voltage	-0.5V to +50VDC	
Power Output	Internally limited, 17.5W typical	
Soldering temperature	300°C for 10 seconds	
Temperature Range ⁶	Operating case temperature	-55°C to +125°C
	Storage case temperature	-65°C to +135°C

TEST	SYMBOL	Condition -55°C ≤ T _C ≤ +105°C, V _{IN} = 28 V _{DC} ±5%, C _L =0 unless otherwise specified		ATO2812T/ES		ATO2815T/ES		Units
				Min	Max	Min	Max	
STATIC CHARACTERISTICS								
OUTPUT Voltage ¹	V _{OUT}	I _{OUT} = 0 (main) I _{OUT} = 0 (dual) ¹	TC = 25°C Over Temp TC = 25°C Over Temp	4.95 4.90 ±11.88 ±11.76	5.05 5.10 ±12.12 ±12.24	4.95 4.90 ±14.85 ±14.70	5.05 5.10 ±15.15 ±15.30	V V V V
Current ^{1,2,3}	I _{OUT}	V _{IN} = 16, 28, and 40 VDC (main) V _{IN} = 16, 28, and 40 VDC (dual) ¹		0.0 0.0	2000 ±208	0.0 0.0	2000 ±167	mA mA
Ripple Voltage ^{1,4}	V _{RIP}	V _{IN} = 16, 28, and 40 VDC BW = DC to 2 MHz (main) V _{IN} = 16, 28, and 40 VDC BW = DC to 2 MHz (dual))			80 40		80 40	mVp-p mVp-p
Power ^{1,2,3}	P _{OUT}	V _{IN} = 16, 28, and 40 VDC (main) (+dual) (-dual) (total)		10 2.5 2.5 15		10 2.5 2.5 15		W W W W
REGULATION								
Line ^{1,3}	VR _{LINE}	V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, 1000, 2000mA (main) V _{IN} = 16, 28, and 40 VDC (dual) I _{OUT} = 0, ±84, ±167mA (dual)	TC = 25°C Over Temp		25 ±30 ±60 50 ±60		25 ±35 ±75 50 ±75	mV
Load ^{1,3}	VR _{LOAD}	V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, 1000, 2000mA (main) V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, ±84, ±167mA (dual)						
INPUT								
Current	I _{IN}	I _{OUT} = 0, Inhibit (pin 8) Tied to input return (pin 10)			15		15	mA
Ripple Current ⁴	I _{RIP}	I _{OUT} = 0, inhibit (pin 2) = open I _{OUT} = 2000 mA (main) I _{OUT} = ±167mA (dual) BW = DC to 2MHz			40 50		40 50	mA mAp-p
EFFICIENCY	E _{FF}	I _{OUT} = 2000mA (main) I _{OUT} = ±167mA (dual) TC = ±25°C	TC = 25°C	76		76		%
ISOLATION	ISO	Input to output or any pin to case (except pin 7) at 500 VDC	TC = 25°C	100		100		MΩ
Load Fault Power Dissipation ³	P _D	Overload, TC = +25°C ⁵ Short Circuit, TC = +25°C	TC = 25°C		8.0 6.0		8.0 6.0	W
Switching Frequency	F _S	I _{OUT} = 2000mA (main) I _{OUT} = ±167mA (dual)		225	275	225	275	KHz
Inhibit Open Circuit Voltage	V _{OI}			9.0	13	9.0	13	V

Notes to Specifications

1. Tested at each output.
2. Parameter guaranteed by line and load regulation tests.
3. At least 20 percent of the total output power should be taken from the (+5V) main output.
4. Bandwidth guaranteed by design. Tested for 20KHz to 2.0MHz.
5. An overload is that condition with a load in excess of the rated load but less than that necessary to trigger the short circuit protection and is the condition of maximum power dissipation.
6. Above 105°C case temperature, derate output power linearly to 0 at 125°C case

ATO28XXT Series

Specifications

International
IR Rectifier

$T_{CASE} = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, $V_{IN} = +28\text{V} \pm 5\%$ unless otherwise specified


Absolute Maximum Ratings		
Input voltage	-0.5V to +50VDC	
Power Output	Internally limited, 17.5W typical	
Soldering temperature	300°C for 10 seconds	
Temperature Range ⁶	Operating case temperature	-55°C to +135°C
	Storage case temperature	-65°C to +135°C

TEST	SYMBOL	Condition -55°C ≤ T _C ≤ +125°C, V _{IN} = 28 V _{DC} ± 5%, C _L = 0 unless otherwise specified		ATO2812T/HB		ATO2815T/HB		Units
				Min	Max	Min	Max	
STATIC CHARACTERISTICS								
Output Voltage ¹	V _{OUT}	I _{OUT} = 0 (main) I _{OUT} = 0 (dual) ¹	TC = 25°C Over Temp TC = 25°C Over Temp	4.95 4.90 ±11.88 ±11.76	5.05 5.10 ±12.12 ±12.24	4.95 4.90 ±14.85 ±14.70	5.05 5.10 ±15.15 ±15.30	V V V V
Current ^{1,2,3}	I _{OUT}	V _{IN} = 16, 28, and 40 VDC (main) V _{IN} = 16, 28, and 40 VDC (dual) ¹		0.0 0.0	2000 ±208	0.0 0.0	2000 ±167	mA mA
Ripple Voltage ^{1,4}	V _{RIP}	V _{IN} = 16, 28, and 40 VDC BW = DC to 2 MHz (main) V _{IN} = 16, 28, and 40 VDC BW = DC to 2 MHz (dual))			80 40		80 40	mVp-p mVp-p
Power ^{1,2,3}	P _{OUT}	V _{IN} = 16, 28, and 40 VDC (main) (+dual) (-dual) (total)		10 2.5 2.5 15		10 2.5 2.5 15		W W W W
REGULATION								
Line ^{1,3}	VR _{LINE}	V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, 1000, 2000mA (main) V _{IN} = 16, 28, and 40 VDC (dual) I _{OUT} = 0, ±84, ±167mA (dual)	TC = 25°C Over Temp		25 ±30 ±60 50		25 ±35 ±75 50	mV
Load ^{1,3}	VR _{LOAD}	V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, 1000, 2000mA (main) V _{IN} = 16, 28, and 40 VDC I _{OUT} = 0, ±84, ±167mA (dual)			±60		±75	
INPUT								
Current	I _{IN}	I _{OUT} = 0, Inhibit (pin 8) Tied to input return (pin 10)			15		15	mA
Ripple Current ⁴	I _{RIP}	I _{OUT} = 0, inhibit (pin 2) = open I _{OUT} = 2000 mA (main) I _{OUT} = ±167mA (dual) BW = DC to 2MHz			40 50		40 50	mA mAp-p
EFFICIENCY	E _{FF}	I _{OUT} = 2000mA (main) I _{OUT} = ±167mA (dual) TC = ±25°C	TC = 25°C	76		76		%
ISOLATION	ISO	Input to output or any pin to case (except pin 7) at 500 VDC	TC = 25°C	100		100		MΩ
Load Fault Power Dissipation ³	P _D	Overload, TC = +25°C ⁵ Short Circuit, TC = +25°C	TC = 25°C		8.0 6.0		8.0 6.0	W
Switching Frequency	F _S	I _{OUT} = 2000mA (main) I _{OUT} = ±167mA (dual)		225	275	225	275	KHz
Inhibit Open Circuit Voltage	V _{OI}			9.0	13	9.0	13	V

Notes to Specifications

1. Tested at each output.
2. Parameter guaranteed by line and load regulation tests.
3. At least 20 percent of the total output power should be taken from the (+5V) main output.
4. Bandwidth guaranteed by design. Tested for 20KHz to 2.0MHz.
5. An overload is that condition with a load in excess of the rated load but less than that necessary to trigger the short circuit protection and is the condition of maximum power dissipation.
6. Above 125°C case temperature, derate output power linearly to 0 at 135°C case


Block Diagram

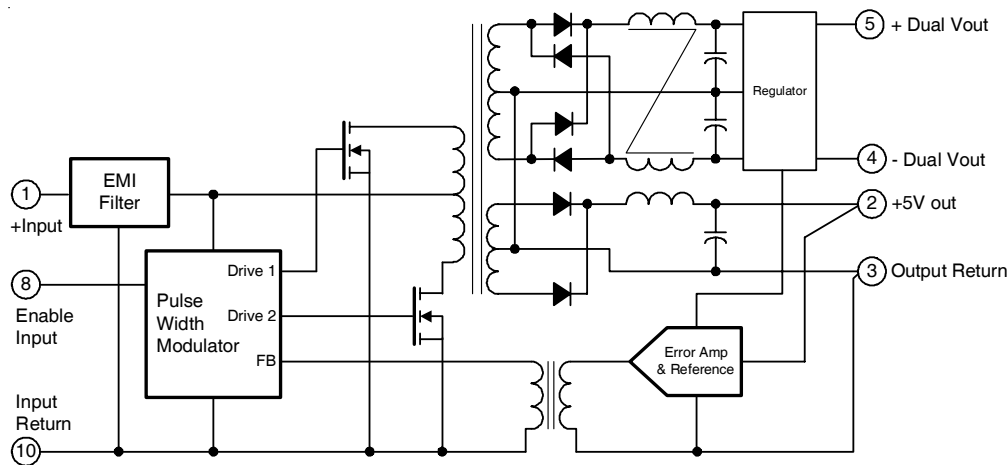

Standard Microcircuit Drawing Equivalence Table

Standard Microcircuit Drawing Number	Vendor Cage Code	IR Standard Part Number
5962-90954	52467	ATO2815T
5962-91602	52467	ATO2812T

Mechanical Outlines

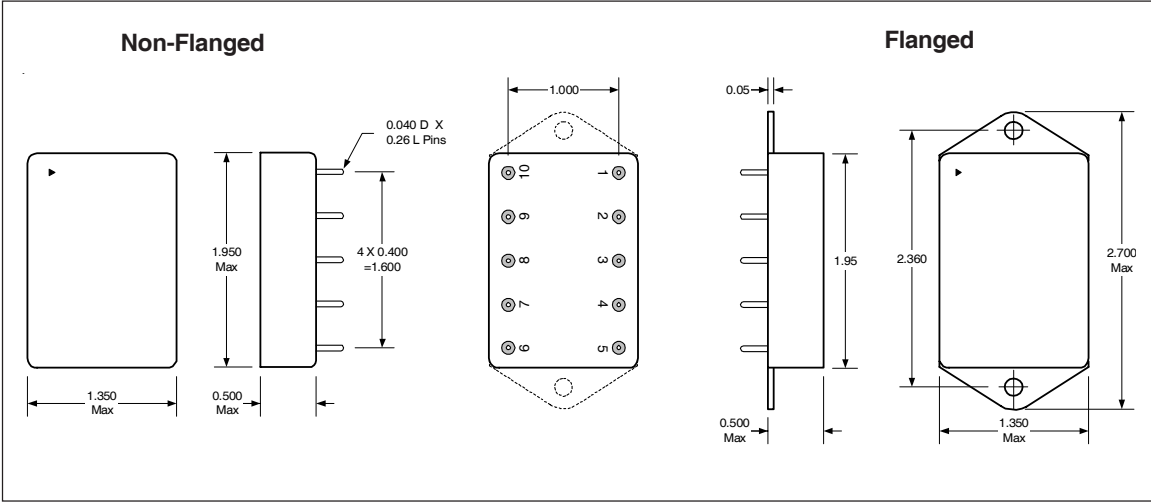

Pin Designation

Pin #	Designation
1	+ Input
2	+5V Output
3	Output Return
4	- Dual Output
5	+ Dual Output
6	NC
7	Case Ground
8	Enable Input
9	NC
10	Input Return

Device Screening

Requirement	MIL-STD-883 Method	No Suffix	ES ②	HB	CH
Temperature Range	—	-20°C to +85°C	-55°C to +125°C ③	-55°C to +125°C	-55°C to +125°C
Element Evaluation	MIL-PRF-38534	N/A	N/A	N/A	Class H
Non-Destructive Bond Pull	2023	N/A	N/A	N/A	N/A
Internal Visual	2017	①	Yes	Yes	Yes
Temperature Cycle	1010	N/A	Cond B	Cond C	Cond C
Constant Acceleration	2001, Y1 Axis	N/A	500 Gs	3000 Gs	3000 Gs
PIND	2020	N/A	N/A	N/A	N/A
Burn-In	1015	N/A	48 hrs@hi temp	160 hrs@125°C	160 hrs@125°C
Final Electrical (Group A)	MIL-PRF-38534 & Specification	25°C	25°C ②	-55°C, +25°C, +125°C	-55°C, +25°C, +125°C
PDA	MIL-PRF-38534	N/A	N/A	N/A	10%
Seal, Fine and Gross	1014	Cond A	Cond A, C	Cond A, C	Cond A, C
Radiographic	2012	N/A	N/A	N/A	N/A
External Visual	2009	①	Yes	Yes	Yes

Notes:

- ① Best commercial practice
- ② Sample tests at low and high temperatures
- ③ -55°C to +105°C for AHE, ATO, ATW

Part Numbering

