

ORDERING INFORMATION

Temp. Range	Package	Part Number
DG469, DG470		
- 40 °C to 125 °C ^a	8-Pin MSOP	DG469EQ-T1-E3 DG470EQ-T1-E3
	8-Pin Narrow SOIC	DG469EY-T1-E3 DG470EY-T1-E3

Notes:

a. - 40 °C to 85 °C datasheet limits apply.

ABSOLUTE MAXIMUM RATINGS $T_A = 25\text{ °C}$, unless otherwise noted

Parameter		Limit	Unit
V+ to V-		44	V
GND to V-		25	
Digital Inputs ^a , V _S , V _D		(V-) - 2 to (V+) + 2 or 30 mA, whichever occurs first	
Continuous Current (NO, NC, or COM)		120	mA
Current (Any terminal except NO, NC, or COM)		30	
Peak Current, (Pulsed 1 ms, 10 % Duty Cycle)		200	
Storage Temperature		- 65 to 150	°C
Power Dissipation (Package) ^b	8-Pin MSOP ^c	320	mW
	8-Pin Narrow SOIC ^d	400	

Notes:

a. Signals on S_X , D_X , or IN_X exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC board.

c. Derate 4.0 mW/°C above 70 °C.

d. Derate 5.0 mW/°C above 70 °C.

SPECIFICATIONS for Dual Supplies

Parameter	Symbol	Test Conditions Unless Specified V+ = 15 V, V- = - 15 V VIN = 2.4 V, 0.8 V ^a	Temp. ^b	Typ. ^c	- 40 °C to 125 °C		- 40 °C to 85 °C		Unit
					Min. ^d	Max. ^d	Min. ^d	Max. ^d	
Analog Switch									
Analog Signal Range ^e	VANALOG		Full		- 15	15	- 15	15	V
On-Resistance	RON	IS = 50 mA, VD = - 10 V to + 10 V	Room Full	3.6		6 8		6 7	Ω
On-Resistance Match	ΔRON	IS = 50 mA, VD = ± 10 V	Room Full	0.12		0.4 0.9		0.4 0.5	
On-Resistance Flatness	RFLATNESS	IS = 50 mA, VD = - 5 V, 0 V, + 5 V	Room Full	0.4		0.5 0.9		0.5 0.8	
Switch Off Leakage Current	IS(off)	VD = ± 14 V, VS = ± 14 V	Room Full	± 0.1	- 0.5 - 20	0.5 20	- 0.5 - 2.5	0.5 2.5	nA
	ID(off)		Room Full	± 0.1	- 0.5 - 20	0.5 20	- 0.5 - 2.5	0.5 2.5	
Channel On Leakage Current	ID(on)	VS = VD = ± 14 V	Room Full	± 0.2	- 0.5 - 20	0.5 20	- 0.5 - 5	0.5 5	
Digital Control									
Input Current, VIN Low	IL	VIN Under Test = 0.8 V	Full	0.05	- 1	1	- 1	1	μA
Input Current, VIN High	I _{IH}	VIN Under Test = 2.4 V	Full	0.05	- 1	1	- 1	1	
Input Capacitance ^e	CIN	f = 1 MHz	Room	3.7					pF

**SPECIFICATIONS for Dual Supplies**

Parameter	Symbol	Test Conditions Unless Specified V+ = 15 V, V- = - 15 V VIN = 2.4 V, 0.8 V ^a	Temp. ^b	Typ. ^c	- 40 °C to 125 °C		- 40 °C to 85 °C		Unit
					Min. ^d	Max. ^d	Min. ^d	Max. ^d	
Dynamic Characteristics									
Turn-On Time	t _{ON}	R _L = 300 Ω, C _L = 35 pF V _S = ± 10 V	Room Full	129		166 200		166 185	ns
Turn-Off Time	t _{OFF}		Room Full	80		108 135		108 120	
Break-Before-Make Time Delay	t _D	V _S = 10 V R _L = 300 Ω, C _L = 35 pF	Room	15					
Charge Injection ^e	Q	V _g = 0 V, R _g = 0 Ω, C _L = 1 nF	Room	58					pC
Off Isolation ^e	OIRR	R _L = 50 Ω, C _L = 5 pF f = 1 MHz	Room	- 57					dB
Channel-to-Channel Crosstalk ^e	X _{TALK}		Room	- 63					
Source Off Capacitance ^e	C _{S(off)}	f = 1 MHz	Room	37					pF
Drain Off Capacitance ^e	C _{D(off)}		Room	85					
Channel On Capacitance ^e	C _{D(on)}		Room	125					
Power Supplies									
Power Supply Current	I+	V+ = 16.5 V, V- = - 16.5 V VIN = 0 or 5 V	Room Full	3.0		6 7		6 7	μA
Negative Supply Current	I-		Room Full	- 0.4	- 0.5 - 4.5		- 0.5 - 4.5		
Ground Current	I _{GND}		Room Full	- 3.0	- 6 - 7		- 6 - 7		

SPECIFICATIONS for Dual Supplies

Parameter	Symbol	Test Conditions Unless Specified V+ = 4.5 V, V- = - 4.5 V VIN = 2.4 V, 0.8 V ^a	Temp. ^b	Typ. ^c	- 45 °C to 125 °C		- 40 °C to 85 °C		Unit
					Min. ^d	Max. ^d	Min. ^d	Max. ^d	
Analog Switch									
Analog Signal Range ^e	V _{ANALOG}		Full		- 4.5	4.5	- 4.5	4.5	V
On-Resistance ^e	R _{ON}	I _S = 50 mA, V _D = - 2 V to + 2 V	Room Full	8		11 16		11 15	Ω
On-Resistance Match ^e	ΔR _{ON}	I _S = 50 mA, V _D = ± 2 V	Room Full	0.6		0.7 0.9		0.7 0.8	
Dynamic Characteristics									
Turn-On Time ^e	t _{ON}	R _L = 300 Ω, C _L = 35 pF V _S = 2 V	Room Full	245		265 340		65 310	ns
Turn-Off Time ^e	t _{OFF}		Room Full	145		163 200		163 185	
Break-Before-Make ^e Time Delay	t _D	V _S = 2 V R _L = 300 Ω, C _L = 35 pF	Room Full	15					
Charge Injection ^e	Q	V _g = 0 V, R _g = 0 Ω, C _L = 1 nF	Full	58					pC
Power Supplies									
Power Supply Current ^e	I+	VIN = 0 or 4.5 V	Room Full	3.0		6 7		6 7	μA
Negative Supply Current ^e	I-		Room Full	- 0.4	- 0.5 - 4.5		- 0.5 - 4.5		
Ground Current ^e	I _{GND}		Room Full	3.0	- 6 - 7		- 6 - 7		

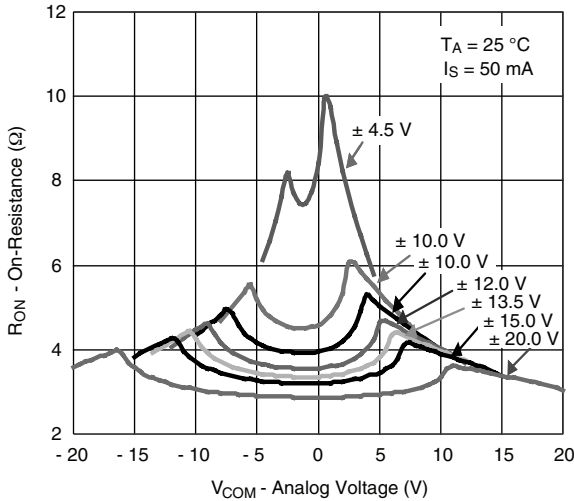
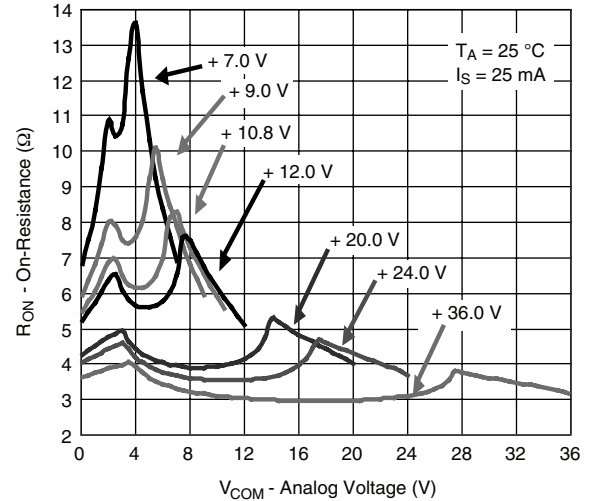
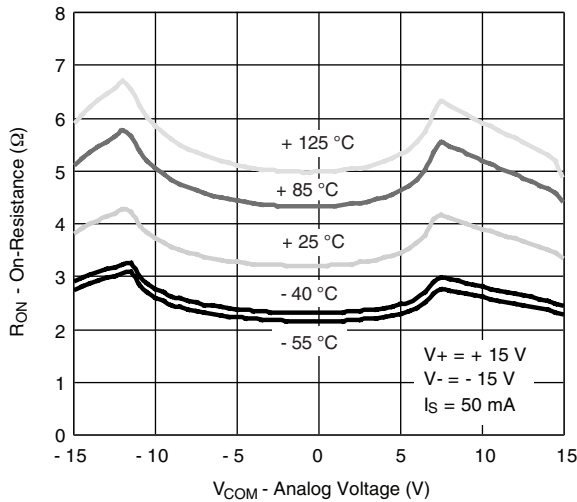
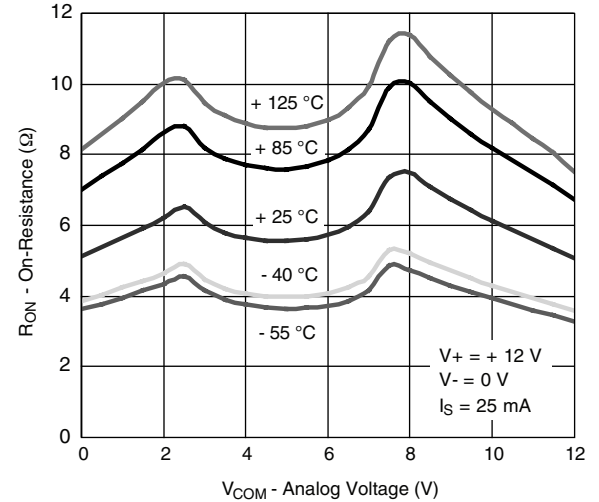
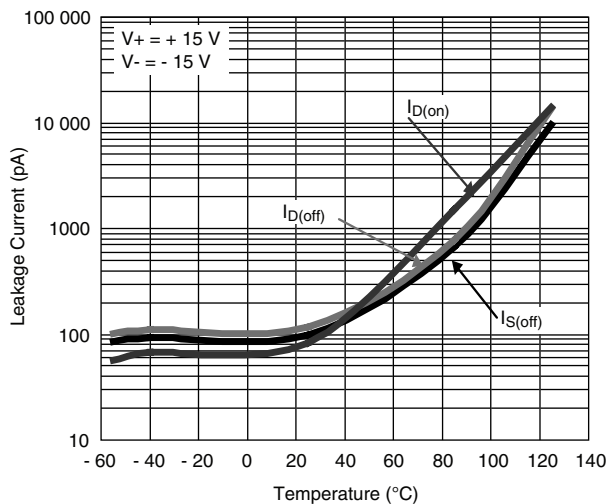
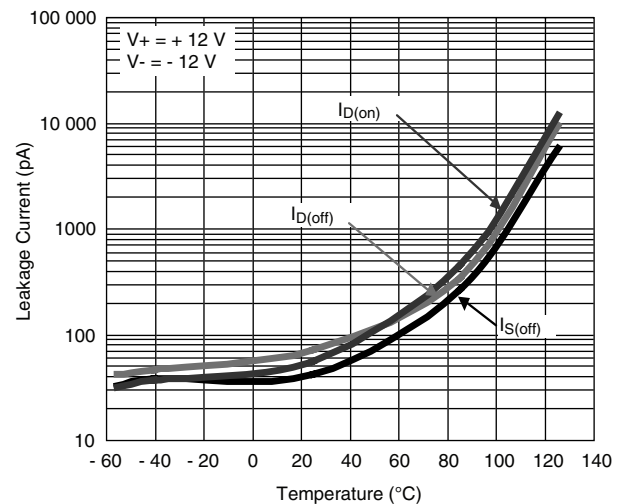
SPECIFICATIONS for Unipolar Supplies

Parameter	Symbol	Test Conditions Unless Specified V ₊ = 12 V, V ₋ = 0 V V _{IN} = 2.4 V, 0.8 V ^a	Temp. ^b	Typ. ^c	- 40 °C to 125 °C		- 40 °C to 85 °C		Unit
					Min. ^d	Max. ^d	Min. ^d	Max. ^d	
Analog Switch									
Analog Signal Range ^e	V _{ANALOG}		Full			12		12	V
On-Resistance	R _{ON}	I _S = 25 mA, V _D = 0 V to + 10 V	Room Full	7.5		8.5 14		8.5 11.3	Ω
On-Resistance Match	ΔR _{ON}	I _S = 25 mA, V _D = + 10 V	Room Full	0.4		0.45 0.9		0.45 0.5	
On-Resistance Flatness	R _{FLATNESS}	I _S = 25 mA, V _D = 0 V, + 5 V, + 10 V	Room Full	2.5		2.6 2.9		2.6 2.8	
Dynamic Characteristics									
Turn-On Time	t _{ON}	R _L = 300 Ω, C _L = 35 pF V _S = 10 V	Room Full	190		200 255		200 240	ns
Turn-Off Time	t _{OFF}		Room Full	100		110 135		110 120	
Break-Before-Make Time Delay	t _D	V _S = 10 V R _L = 300 Ω, C _L = 35 pF	Room	50					
Charge Injection ^e	Q	V _g = 0 V, R _g = 0 Ω, C _L = 1 nF	Room	2.4					pC
Power Supplies									
Power Supply Current	I ₊	V _{IN} = 0 or 5 V	Room Full	3.0		6 7		6 7	μA
Negative Supply Current	I ₋		Room Full	- 0.4	- 0.5 - 4.5		- 0.5 - 4.5		
Ground Current	I _{GND}		Room Full	- 3.0	- 6 - 7		- 6 - 7		

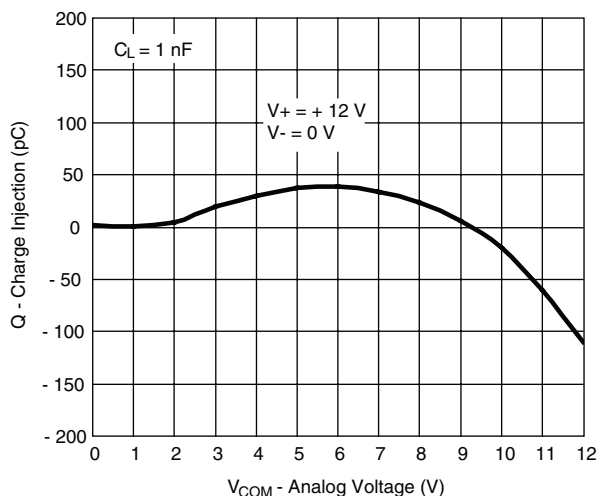
Notes:

- a. V_{IN} = input voltage to perform proper function.
b. Room = 25 °C, Full = as determined by the operating temperature suffix.
c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
e. Guaranteed by design, not subject to production test.

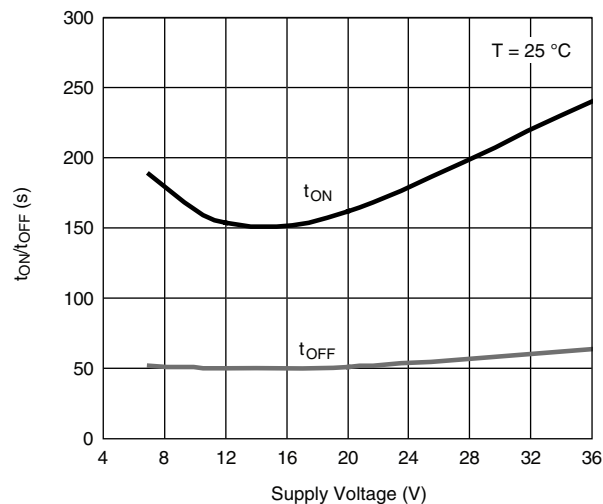
Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

TYPICAL CHARACTERISTICS

On-Resistance vs. V_D and Dual Supply Voltage

On-Resistance vs. V_D and Single Supply Voltage

On-Resistance vs. V_D and Temperature

On-Resistance vs. V_D and Temperature

Leakage Current vs. Temperature

Leakage Current vs. Temperature

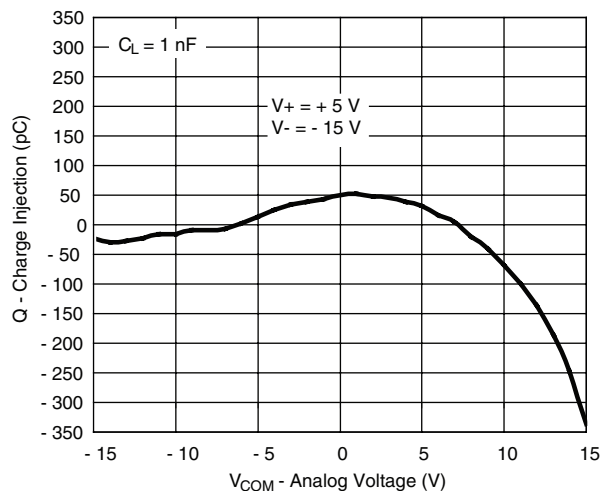
TYPICAL CHARACTERISTICS



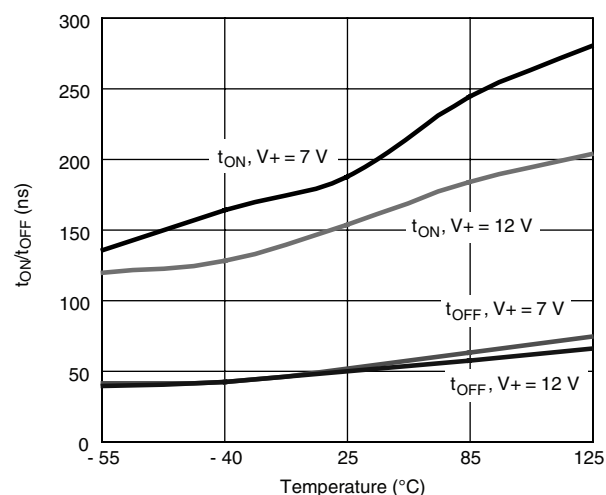
Charge Injection vs. Analog Voltage



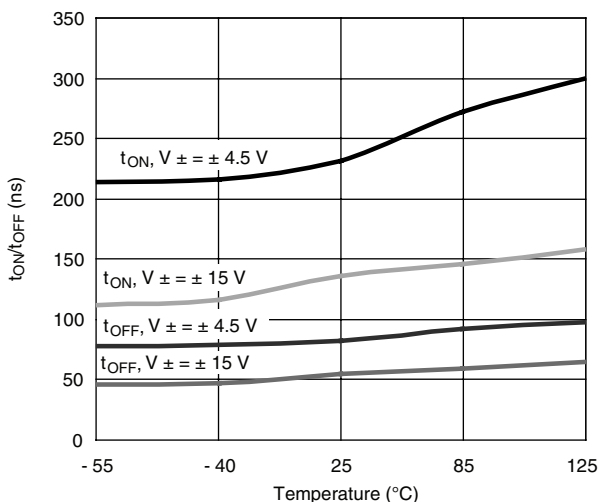
Switching Time vs. Single Supply Voltage



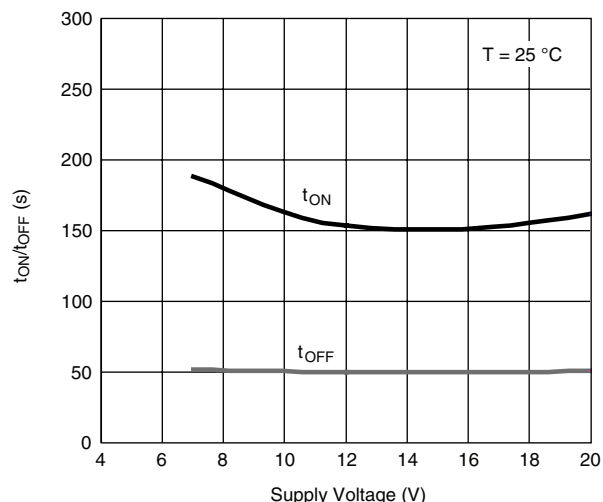
Charge Injection vs. Analog Voltage



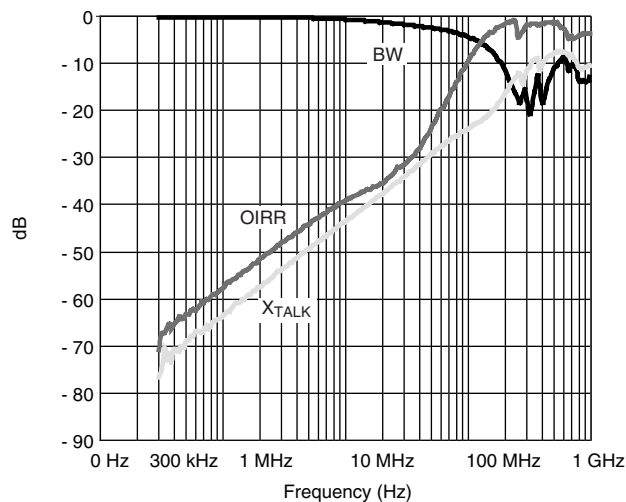
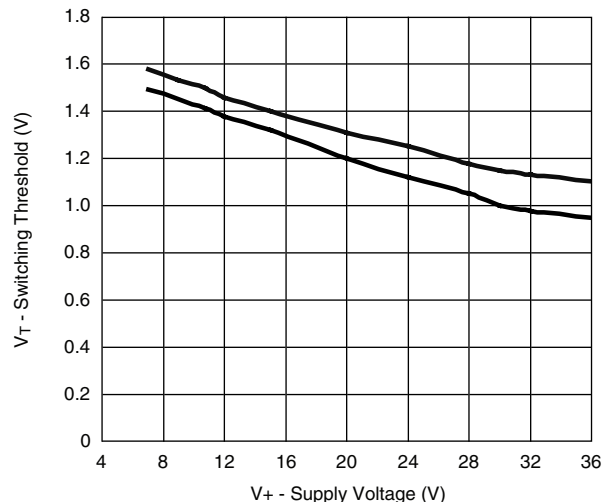
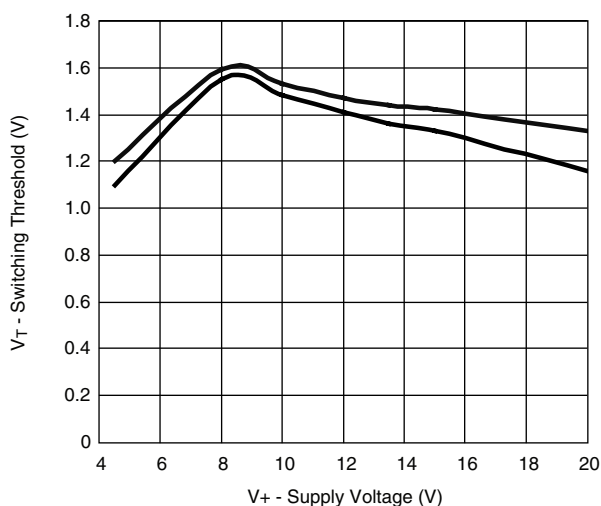
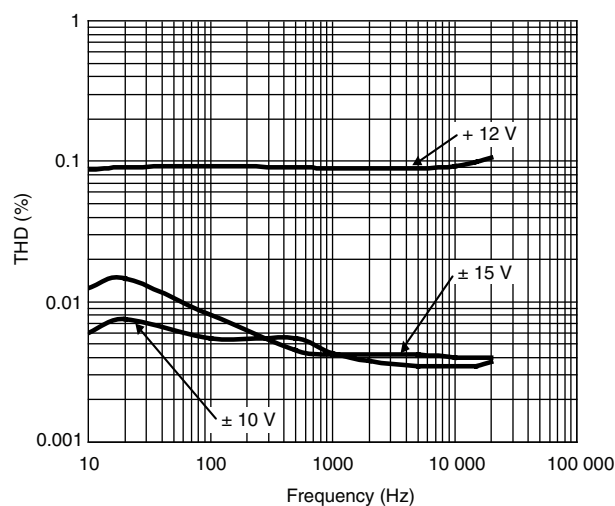
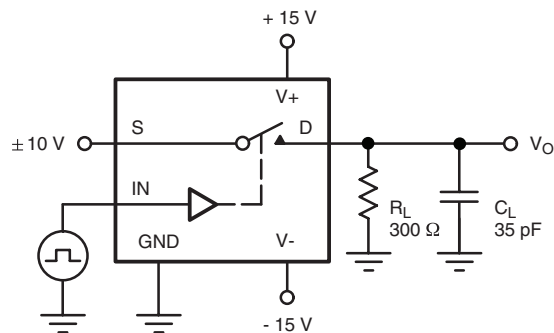
Switching Time vs. Temperature and Single Supply Voltage



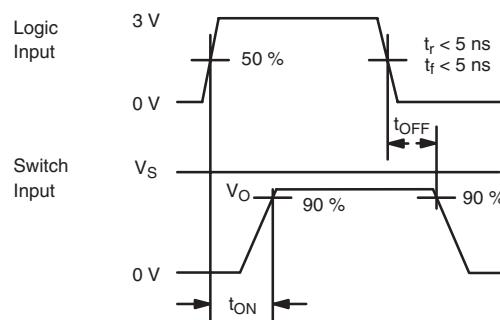
Switching Time vs. Temperature and Dual Supply Voltage



Switching Time vs. Dual Supply Voltage

TYPICAL CHARACTERISTICS

Insertion Loss, Off-Isolation, Crosstalk vs. Frequency

Switching Threshold vs. Signal Supply Voltage

Switching Threshold vs. Dual Supply Voltage

DG469, DG470 Total Harmonic Distortion
TEST CIRCUITS

 C_L (includes fixture and stray capacitance)

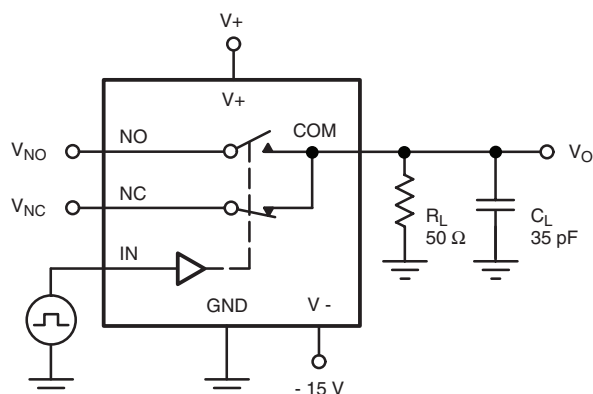
$$V_O = V_S \frac{R_L}{R_L + r_{DS(on)}}$$



Note: Logic input waveform is inverted for switches that have the opposite logic sense control.

Figure 1. Switching Time

TEST CIRCUITS



C_L (includes fixture and stray capacitance)

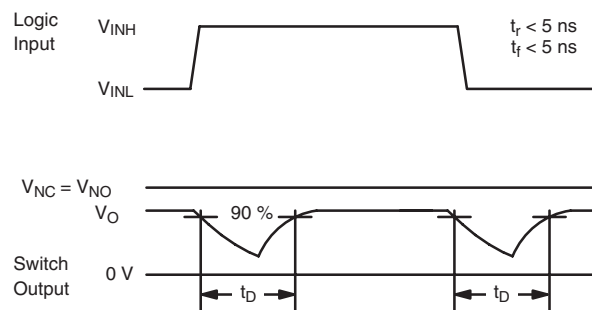


Figure 2. Break-Before-Make

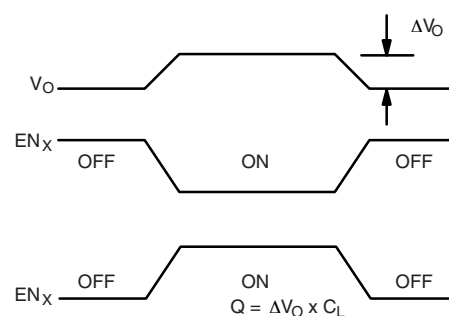
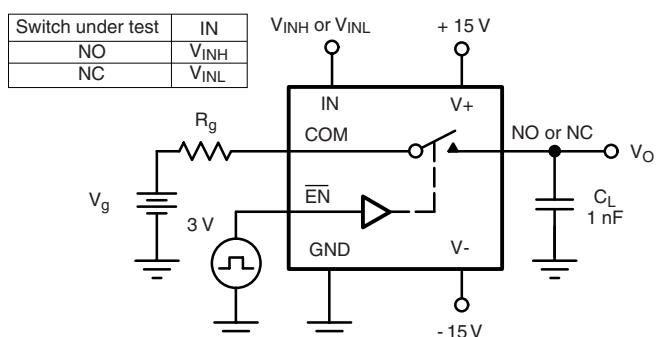


Figure 3. Charge Injection

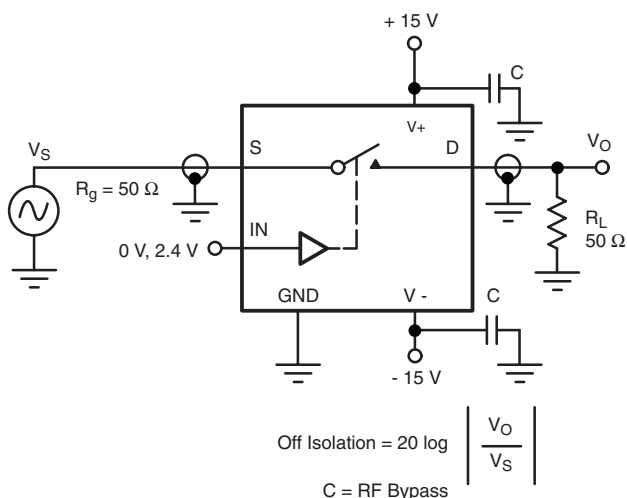


Figure 4. Off-Isolation

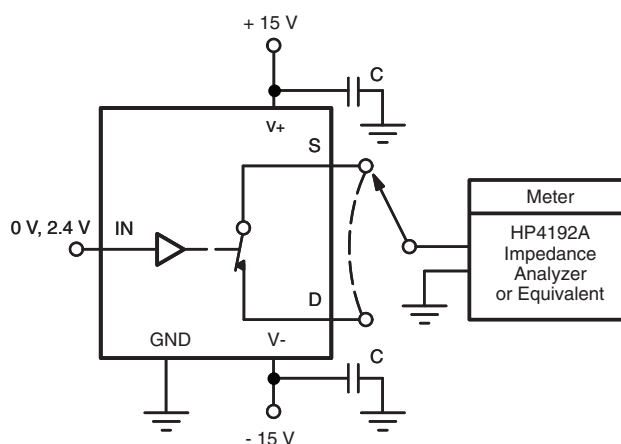


Figure 5. Source/Drain Capacitances

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?71470.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.