
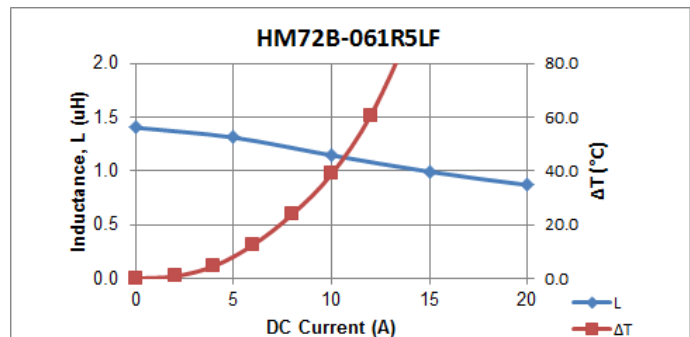
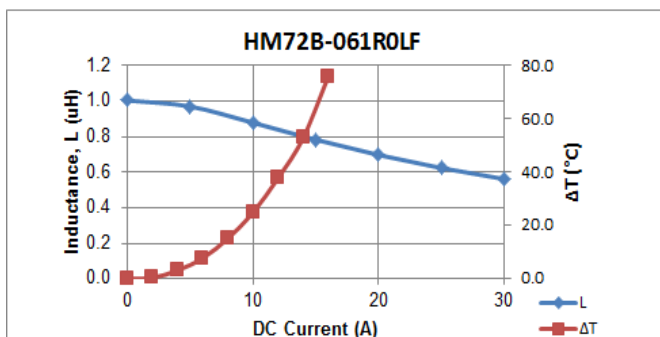
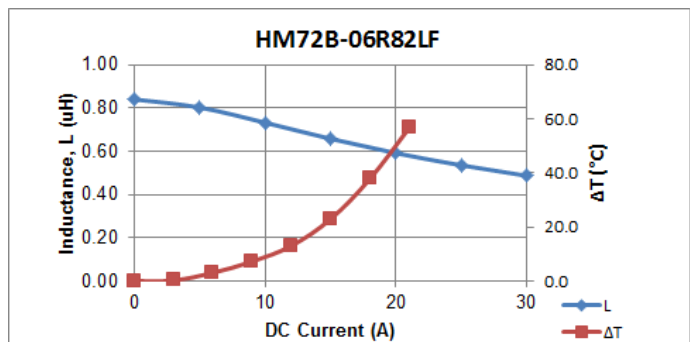
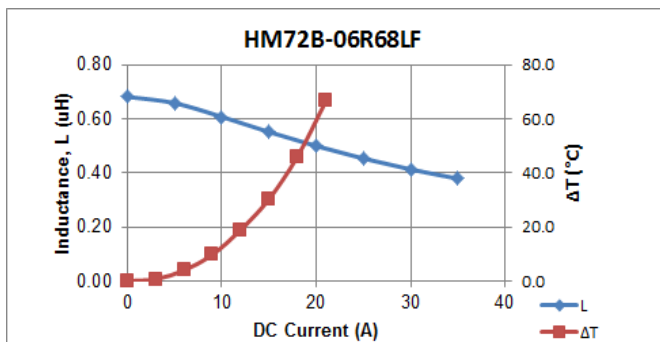
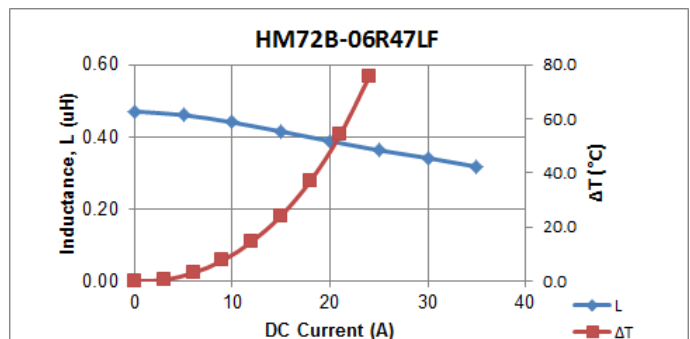
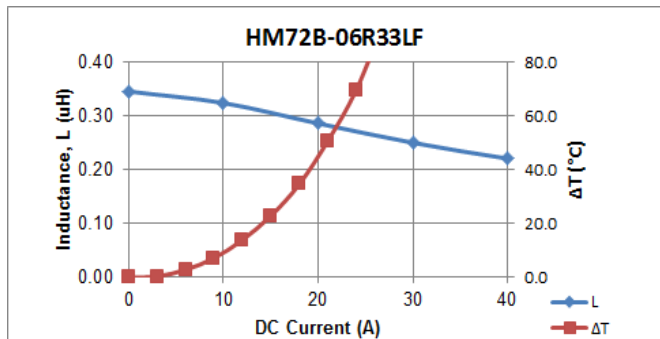
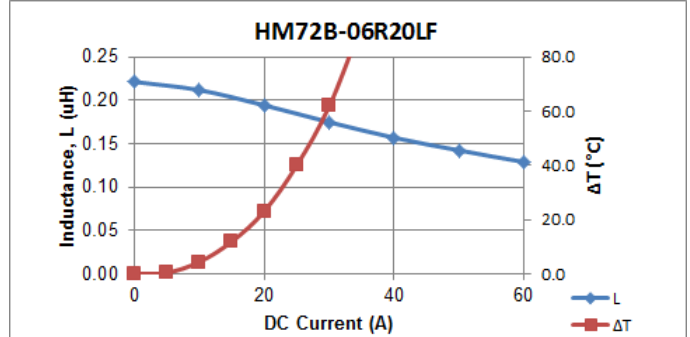


## Electrical Characteristic @ 25°C

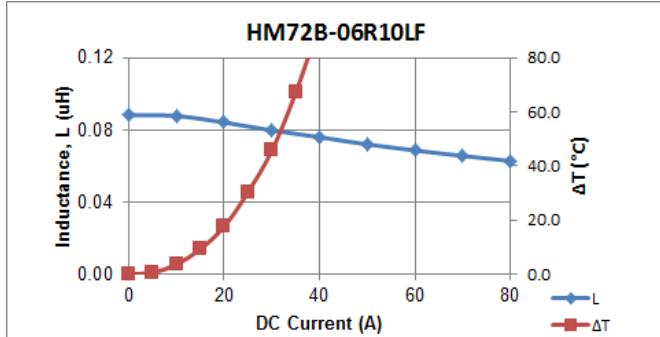








### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# High Power High Performance Molded Surface Mount Inductors



## Model HM72B-06 Series

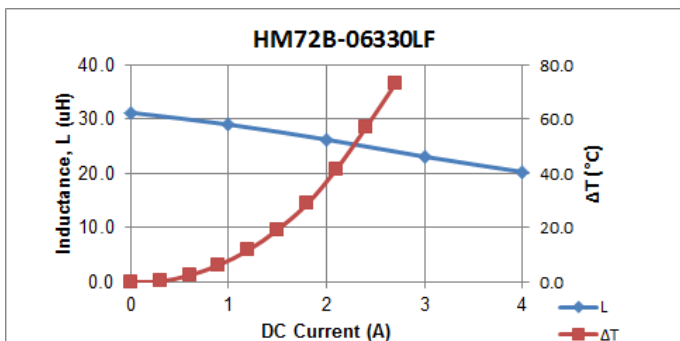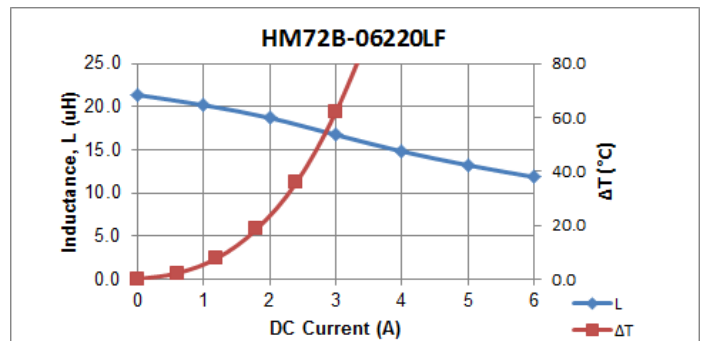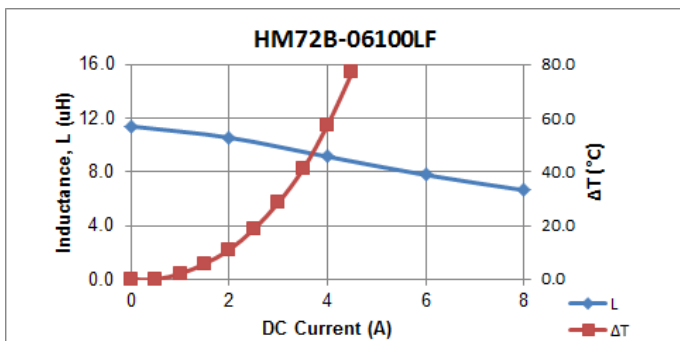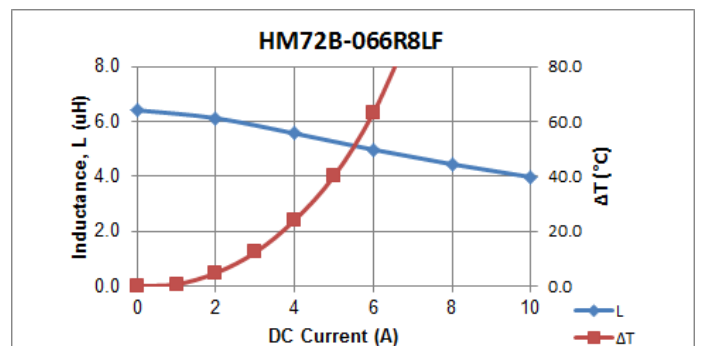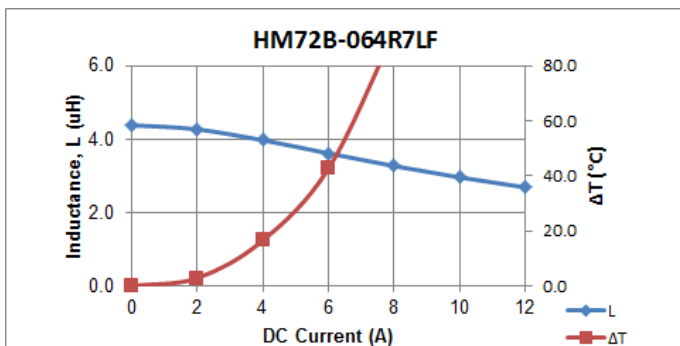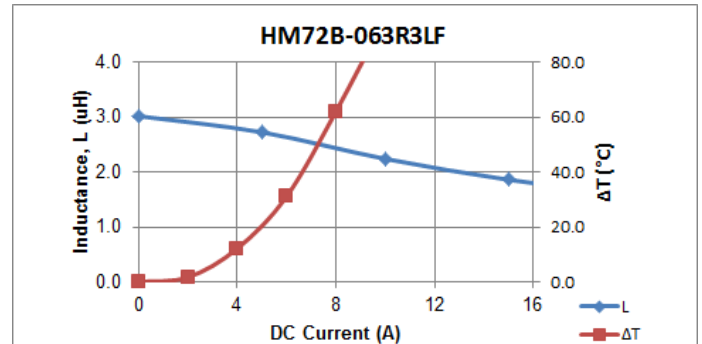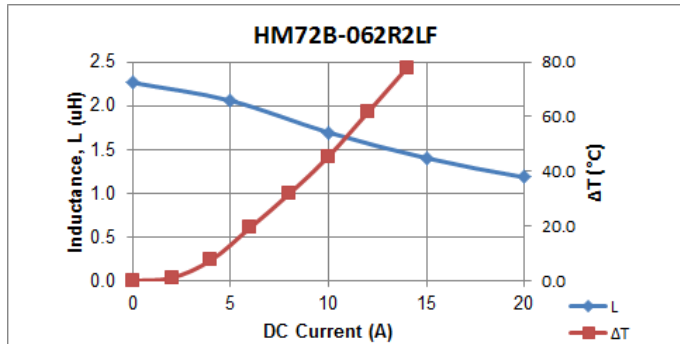

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

BI Technologies  
A-1445, Jalan Tanjung Api  
25050 Kuantan  
Pahang Darul Makmur  
Malaysia  
Ph: +60 9 565 8888 Fax: +60 9 514 3555  
<http://www.ttelectronics.com/magnetics/customer-service-enquiry>

Rev. 02 10.17

Model HM72B-06 Series

## Packaging / Ordering Information

One reel (13")	2000 pcs
One shipping carton (6 reels)	12000 pcs

## Ordering Information

Model Series HM72B - 06 R33 LF TR13

Case Size \_\_\_\_\_

Inductance Code: \_\_\_\_\_

13" tape & reel packing

Lead Free

First 2 digits are significant. Last digit denotes number of trailing zeros. For values below 10-H, "R" denotes the decimal point.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

BI Technologies  
A-1445, Jalan Tanjung Api  
25050 Kuantan  
Pahang Darul Makmur  
Malaysia  
Ph: +60 9 565 8888 Fax: +60 9 514 3555  
<http://www.ttelectronics.com/magnetics/customer-service-enquiry>

Rev. 02 10.17