

ABOUT KEYSTONE ELECTRONICS

CUSTOM CAPABILITIES

VIEW DYNAMIC PDF CATALOG

PART BUILDER SYSTEM

CALENDAR OF EVENTS

NEWS, ADS AND VIDEOS

DISTRIBUTOR LOCATOR

ON-LINE ORDERING

CHECK DISTRIBUTOR STOCK

PRODUCT CATALOG:

ALL PRODUCT CATEGORIES

BATTERY & COIN CELL HOLDERS,
CONTACTS & CLIPSBRACKETS (COMPUTER &
MOUNTING)ELECTRONIC HARDWARE &
ACCESSORIES

FUSE CLIPS & FUSE HOLDERS

HANDLES FOR INSTRUMENTATION

LED SPACERS & LENS CAPS

PLUGS, PINS, JACKS & SOCKETS

QUICK-FIT TERMINALS

SCREW TERMINALS & TERMINAL
BLOCKS

SCREWS & PANEL HARDWARE

SPACERS & STANDOFFS

TERMINALS & TERMINAL BOARDS

TEST POINTS, TIPS, PROBES,
JUMPERS AND CLIPS

ISO 9001:2008 CERTIFIED

ROHS COMMITMENT

REACH DECLARATION

CONFLICT MINERALS DECLARATION

DISTRIBUTOR LOG-IN CENTER

PRODUCT WARRANTY INFORMATION


Threaded Force-Fit Standoffs

Spacers & Standoffs » Standoffs, Force-Fit »

Force Fit Standoffs

Supplied in Stainless Steel

A broaching-type fastener standoff for installation in panels and circuit boards from .060" and thicker, made of plastic and other non-ductile material.

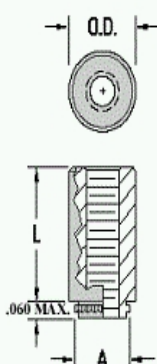

CAT. NO.	"L" LENGTH	THREAD	O.D.	"A"	MOUNTING HOLES
4860	.065 [1,65]	2-56	.219 [5,56]	.165 [4,19]	.147 [3,73] hole for 2-56
4861	.065 [1,65]	4-40	.219 [5,56]	.184 [4,67]	.166 [4,22] hole for 4-40
4862	.125 [3,18]				
4863	.250 [6,35]				
4864	.375 [9,53]				
4865*	.500 [12,7]				
4866	.065 [1,65]	6-32	.281 [7,14]	.231 [5,87]	.213 [5,41] hole for 6-32
4867	.125 [3,18]				
4868	.250 [6,35]				
4869	.375 [9,53]				
4870*	.500 [12,7]				
* Thread depth .375 [9,53]					
Tolerance on Mounting Holes: +.003/- .000					

Products: [Show/Hide Product View](#)Force-Fit Threaded Standoff
P/N 4860Force-Fit Threaded Standoff
P/N 4861Force-Fit Threaded Standoff
P/N 4862Force-Fit Threaded Standoff
P/N 4863Force-Fit Threaded Standoff
P/N 4864Force-Fit Threaded Standoff
P/N 4865Force-Fit Threaded Standoff
P/N 4866Force-Fit Threaded Standoff
P/N 4867Force-Fit Threaded Standoff
P/N 4868Force-Fit Threaded Standoff
P/N 4869Force-Fit Threaded Standoff
P/N 4870