

DYNAMIC CHARACTERISTICS

APT30M70BVFR

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
C_{iss}	Input Capacitance	$V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1\text{ MHz}$		4890	5870	pF
C_{oss}	Output Capacitance			882	1235	
C_{rss}	Reverse Transfer Capacitance			277	415	
Q_g	Total Gate Charge ^③	$V_{GS} = 10V$ $V_{DD} = 0.5 V_{DSS}$ $I_D = I_D [\text{Cont.}] @ 25^\circ\text{C}$		152	225	nC
Q_{gs}	Gate-Source Charge			35	52	
Q_{gd}	Gate-Drain ("Miller") Charge			66	99	
$t_{d(on)}$	Turn-on Delay Time	$V_{GS} = 15V$ $V_{DD} = 0.5 V_{DSS}$ $I_D = I_D [\text{Cont.}] @ 25^\circ\text{C}$ $R_G = 1.6\Omega$		14	28	ns
t_r	Rise Time			21	42	
$t_{d(off)}$	Turn-off Delay Time			57	85	
t_f	Fall Time			10	20	

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
I_S	Continuous Source Current (Body Diode)			48	Amps
I_{SM}	Pulsed Source Current ^① (Body Diode)			192	
V_{SD}	Diode Forward Voltage ^② ($V_{GS} = 0V$, $I_S = -I_D [\text{Cont.}]$)			1.3	Volts
dv/dt	Peak Diode Recovery dv/dt ^⑤			5	V/ns
t_{rr}	Reverse Recovery Time ($I_S = -I_D [\text{Cont.}]$, $di/dt = 100A/\mu s$)	$T_j = 25^\circ\text{C}$		225	ns
		$T_j = 125^\circ\text{C}$		400	
Q_{rr}	Reverse Recovery Charge ($I_S = -I_D [\text{Cont.}]$, $di/dt = 100A/\mu s$)	$T_j = 25^\circ\text{C}$	1.0		μC
		$T_j = 125^\circ\text{C}$	4.2		
I_{RRM}	Peak Recovery Current ($I_S = -I_D [\text{Cont.}]$, $di/dt = 100A/\mu s$)	$T_j = 25^\circ\text{C}$	10		Amps
		$T_j = 125^\circ\text{C}$	20		

THERMAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.34	$^\circ\text{C/W}$
$R_{\theta JA}$	Junction to Ambient			40	

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② Pulse Test: Pulse width < 380 μs , Duty Cycle < 2%

③ See MIL-STD-750 Method 3471

④ Starting $T_j = +25^\circ\text{C}$, $L = 1.13\text{mH}$, $R_G = 25\Omega$, Peak $I_L = 48\text{A}$

⑤ $I_S \leq -I_D [\text{Cont.}]$, $di/dt = 100A/\mu s$, $V_{DD} \leq V_{DSS}$, $T_j \leq 150^\circ\text{C}$, $R_G = 2.0\Omega$, $V_R = 200V$.

APT Reserves the right to change, without notice, the specifications and information contained herein.

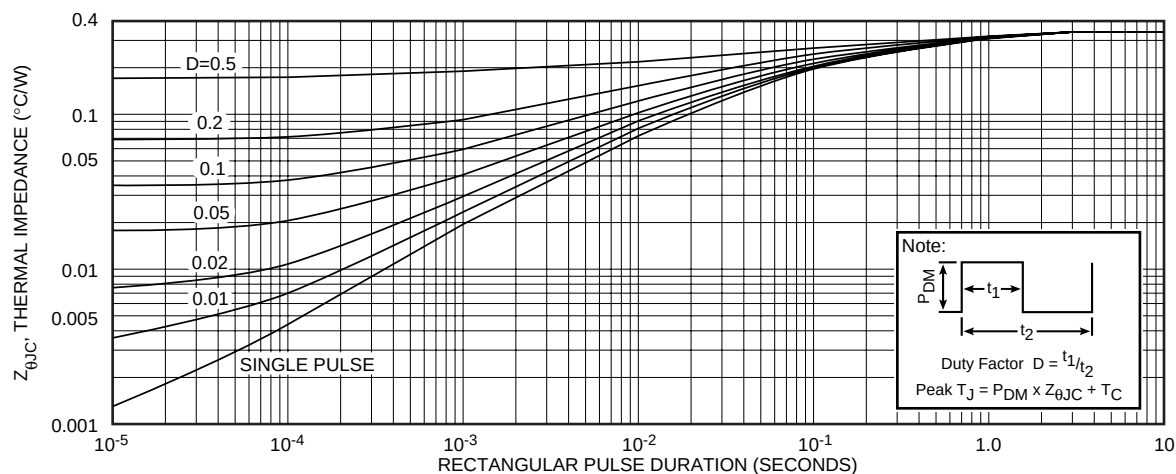


FIGURE 1, MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs PULSE DURATION

APT30M70BVFR(G)

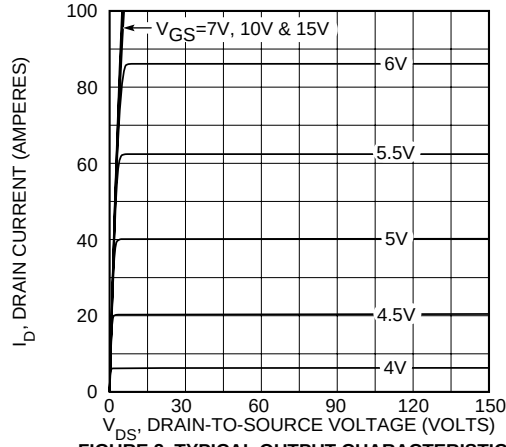


FIGURE 2, TYPICAL OUTPUT CHARACTERISTICS

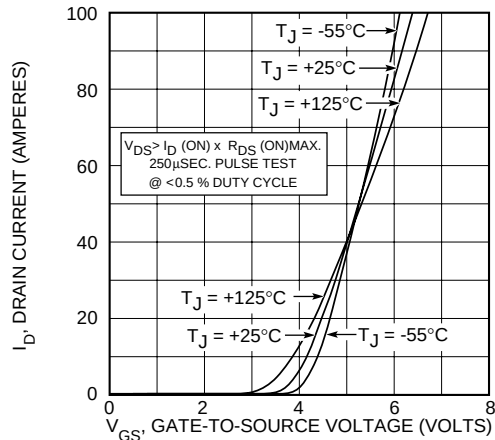


FIGURE 4, TYPICAL TRANSFER CHARACTERISTICS

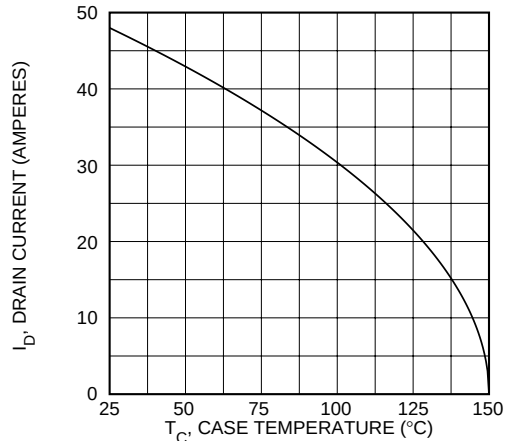


FIGURE 6, MAXIMUM DRAIN CURRENT vs CASE TEMPERATURE

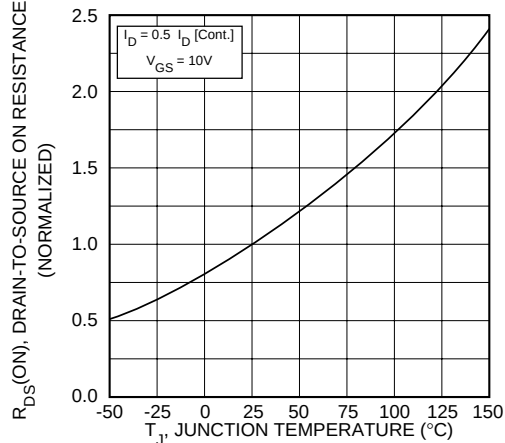


FIGURE 8, ON-RESISTANCE vs. TEMPERATURE

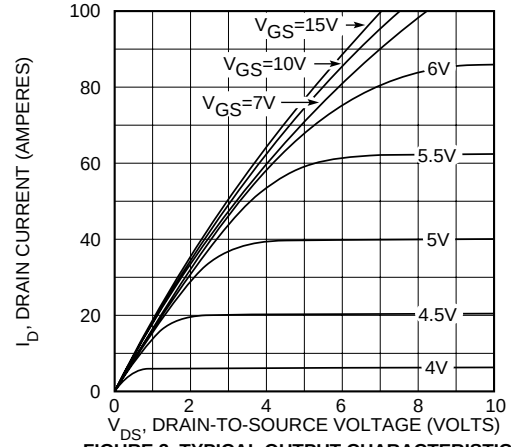


FIGURE 3, TYPICAL OUTPUT CHARACTERISTICS

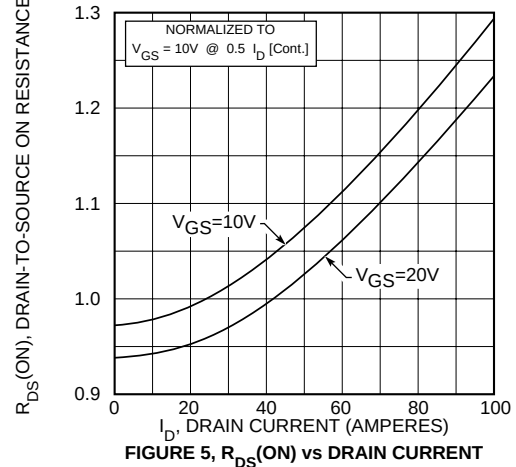


FIGURE 5, $R_{DS(ON)}$ vs DRAIN CURRENT

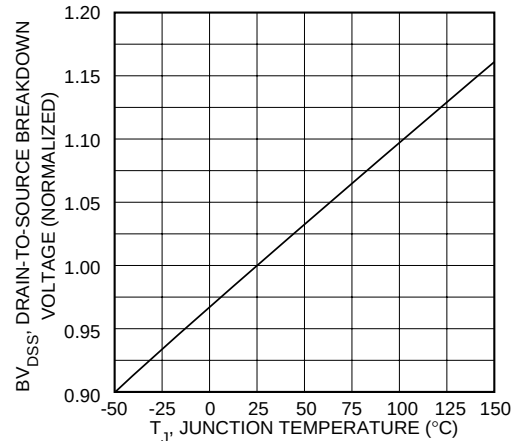


FIGURE 7, BREAKDOWN VOLTAGE vs TEMPERATURE

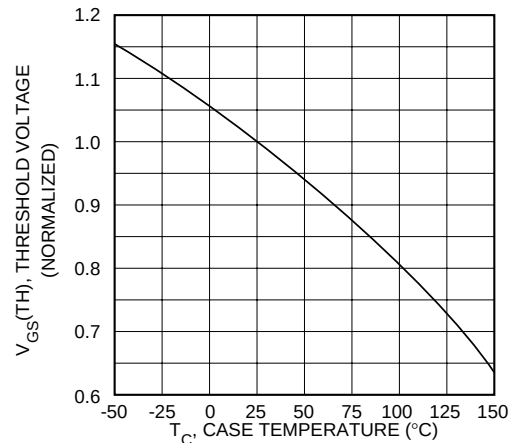


FIGURE 9, THRESHOLD VOLTAGE vs TEMPERATURE

APT30M70BVF(R)(G)

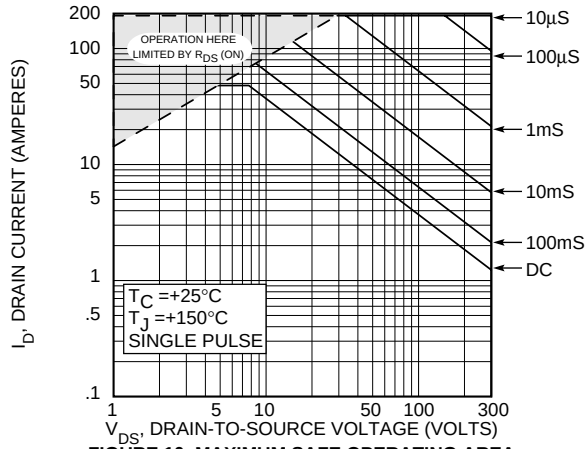


FIGURE 10, MAXIMUM SAFE OPERATING AREA

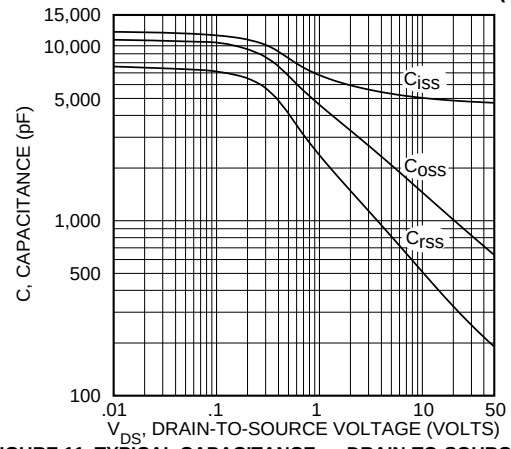


FIGURE 11, TYPICAL CAPACITANCE vs DRAIN-TO-SOURCE VOLTAGE

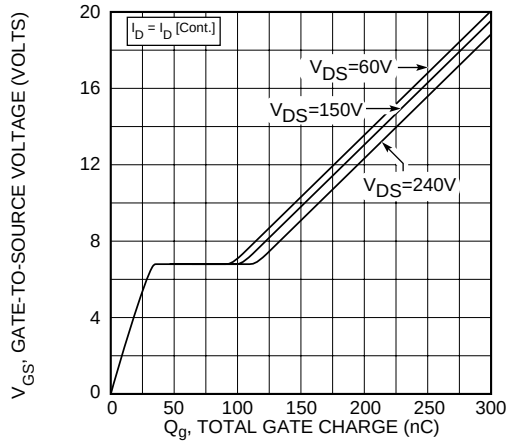


FIGURE 12, GATE CHARGES vs GATE-TO-SOURCE VOLTAGE


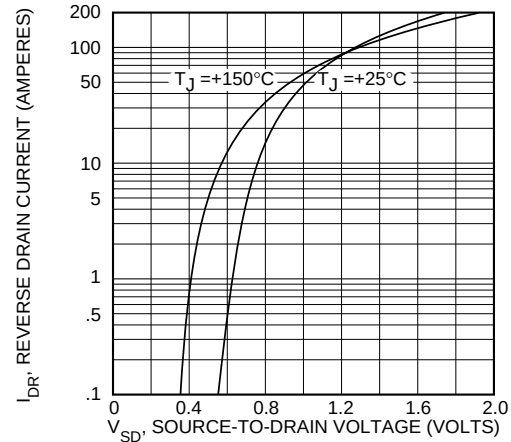


FIGURE 13, TYPICAL SOURCE-DRAIN DIODE FORWARD VOLTAGE

TO-247 Package Outline

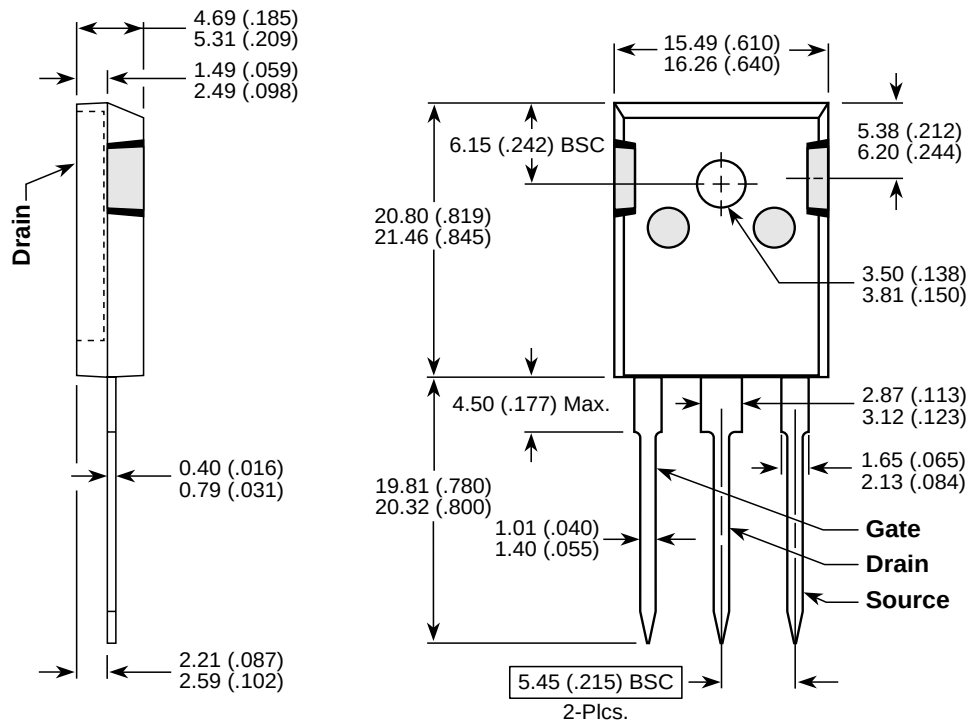

Dimensions in Millimeters and (Inches)