


■ Accessories (Order Separately)

Special Key Tops are available for projected Switch models. See page 52.

Nomenclature

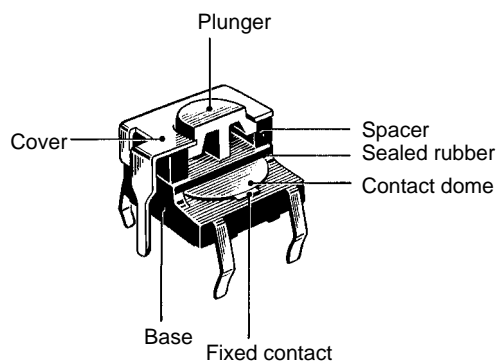


Specifications

■ Ratings/Characteristics


Switching capacity	1 to 50 mA, 5 to 24 VDC (resistive load)
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² {approx. 100 G} max. Malfunction: 100 m/s ² {approx. 10 G} max.
Life expectancy	B3W-1□□□: Standard force: 1,000,000 operations min. High-force: 300,000 operations min. B3W-4□□□: Standard force: 3,000,000 operations min. High-force: 1,000,000 operations min.
Ambient temperature	-25°C to 70°C (with no icing)
Ambient humidity	35% to 85%
Weight	6 x 6 mm: approx. 0.3 g, 12 x 12: approx. 1.00 g

Engineering Data

Operating Force vs. Stroke (Typical)
B3W-1□□□

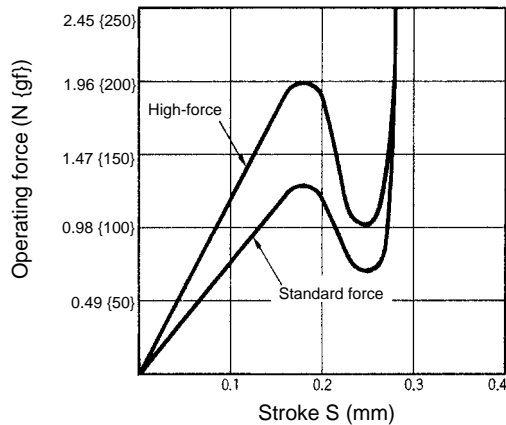

B3W-4□□□

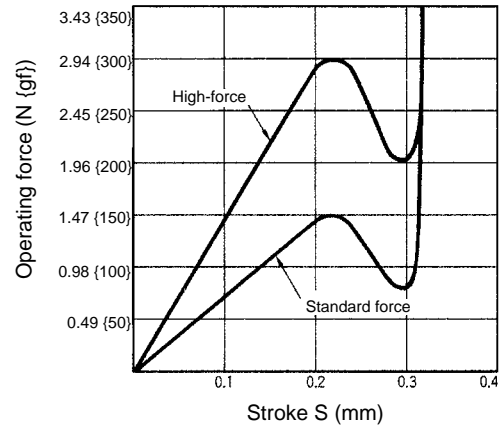





Dimensions

- Note:**
1. All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.
 2. No terminal numbers are indicated on the Switches. The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram below. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up.




■ 6 x 6 mm Models


Flat Plunger Type
(without Ground Terminal)
B3W-1000, -1002







PCB Mounting
(Top View)
(Single-sided
PCB, t=1.6)




Terminal Arrangement
/Internal Connections
(Top View)




Flat Plunger Type
(with Ground Terminal)
B3W-1100, -1102





PCB Mounting
(Top View)
(Single-sided
PCB, t=1.6)

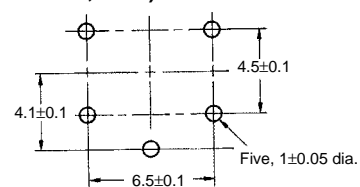


Terminal Arrangement
/Internal Connections
(Top View)




Projected Plunger Type (without Ground Terminal) B3W-1050, -1052

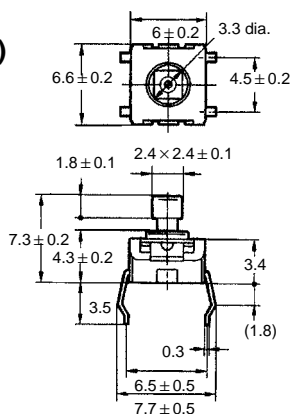



PCB Mounting
(Top View)
(Single-sided
PCB, t=1.6)




Terminal Arrangement
/Internal Connections
(Top View)




Projected Plunger Type (with Ground Terminal) B3W-1150, -1152

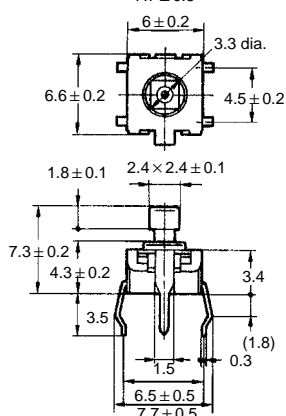

PCB Mounting
(Top View)
(Single-sided
PCB, t=1.6)

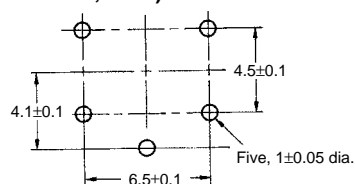

Terminal Arrangement
/Internal Connections
(Top View)





■ Operating Characteristics


Item	B3W-1□□0	B3W-1□□2
Operating force (OF)	1.57 N {160 gf} max.	2.25 N {230 gf} max.
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.25 ^{+0.2} / _{-0.1} mm	

■ 12 x 12 mm Models


Flat Plunger Type (without Ground Terminal) B3W-4000, -4005

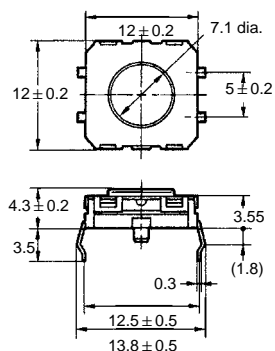



PCB Mounting
(Top View)
(Single-sided
PCB, t=1.6)

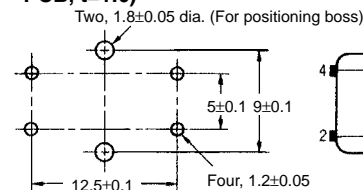


Terminal Arrangement
/Internal Connections
(Top View)




Flat Plunger Type (with Ground Terminal) B3W-4100, -4105

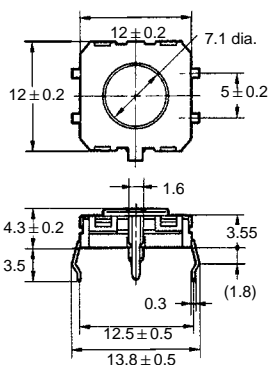



PCB Mounting
(Top View)
(Single-sided
PCB, t=1.6)

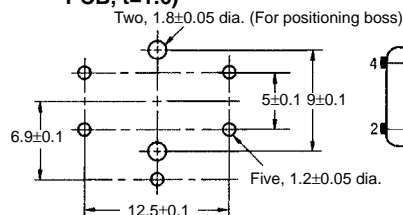

Terminal Arrangement
/Internal Connections
(Top View)




Projected Plunger Type (without Ground Terminal) B3W-4050, -4055

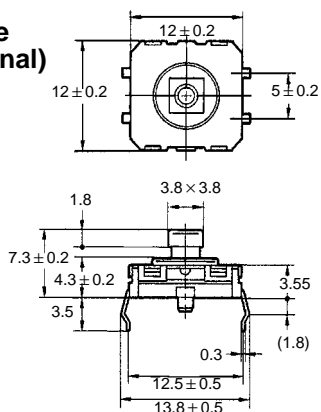



PCB Mounting (Top View) (Single-sided PCB, t=1.6)

Terminal Arrangement /Internal Connections (Top View)

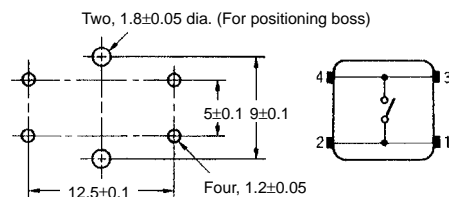


Projected Plunger Type (with Ground Terminal) B3W-4150, -4155

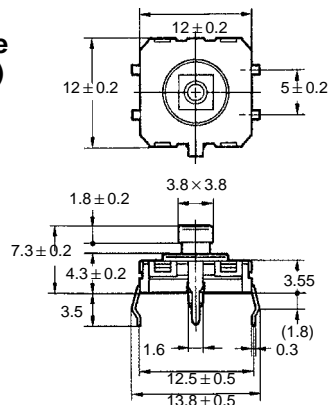

PCB Mounting (Top View) (Single-sided PCB, t=1.6)

Terminal Arrangement /Internal Connections (Top View)

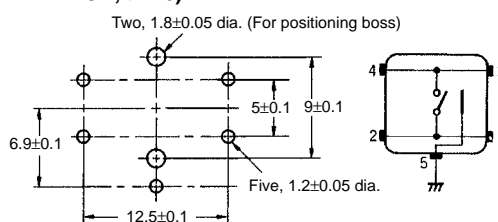

■ Operating Characteristics

Item	B3W-4□□0	B3W-4□□5
Operating force (OF)	1.96 N {200 gf} max.	3.43 N {350 gf} max.
Releasing force (RF)	0.29 N {30 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.3 ^{+0.2} / _{-0.1} mm	

Precautions

Operation

Do not apply additional force to the plunger once it has stopped.

PCB

The Switch is designed for a 1.6-mm-thick, single-sided PCB. Using PCBs that are different in thickness or using double-sided, through-hole PCBs may result in loose mounting, improper insertion, or poor heat resistance in soldering. Whether these problems arise or not will be depend on the type of holes, patterns, etc. Therefore, it is recommended that a verification test is conducted before use.

Soldering

The Switch can be soldered automatically or manually.

The automatic soldering of the Switch on a 1.6-mm-thick, single-sided PCB must be completed within five seconds at a soldering temperature of 260°C maximum.

The manual soldering of the Switch on a 1.6-mm-thick, single-sided PCB must be completed within three seconds at a soldering iron tip temperature of 350°C maximum.

Cleaning

Clean with alcohol solvents. Do not use chlorine solvents or water. When cleaning in multiple-tank systems, do not clean for more than 1 minute at a time or for more than 3 minutes total.

Do not apply external force to the Switch during cleaning.

Do not clean immediately after soldering. Allow components to stand for at least 3 minutes before cleaning if possible.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.