


Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V	
I _R	reverse current, drain current	V _R = 600 V	T _{VJ} = 25°C			250	μA	
		V _R = 600 V	T _{VJ} = 150°C			1	mA	
V _F	forward voltage drop	I _F = 30 A	T _{VJ} = 25°C			1.60	V	
		I _F = 60 A				1.91	V	
		I _F = 30 A	T _{VJ} = 150°C			1.25	V	
		I _F = 60 A				1.52	V	
I _{FAV}	average forward current	T _C = 135°C rectangular d = 0.5	T _{VJ} = 175°C			30	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 175°C		0.91	V	
r _F	slope resistance					8.7	mΩ	
R _{thJC}	thermal resistance junction to case					0.9	K/W	
R _{thCH}	thermal resistance case to heatsink				0.25		K/W	
P _{tot}	total power dissipation	T _C = 25°C				165	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		250	A	
C _J	junction capacitance	V _R = 400 V f = 1 MHz		T _{VJ} = 25°C		26	pF	
I _{RM}	max. reverse recovery current	} I _F = 30 A; V _R = 300 V -di _F /dt = 200 A/μs		T _{VJ} = 25 °C		6	A	
				T _{VJ} = 100 °C		10	A	
t _{rr}	reverse recovery time			T _{VJ} = 25 °C		35	ns	
				T _{VJ} = 100 °C		100	ns	

Package TO-247			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			70	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				6		g
M_D	mounting torque		0.8		1.2	Nm
F_C	mounting force with clip		20		120	N

Product Marking



Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSEP30-06A	DSEP30-06A	Tube	30	471828


Similar Part	Package	Voltage class
DSEP29-06A	TO-220AC (2)	600
DSEP29-06AS	TO-263AB (D2Pak) (2)	600
DSEP30-06B	TO-247AD (2)	600
DSEP30-06BR	ISOPLUS247 (2)	600

DHG30I600HA	TO-247AD (2)	600
DHG30I600PA	TO-220AC (2)	600
DHG30IM600PC	TO-263AB (D2Pak) (2)	600

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 175^{\circ}\text{C}$



$V_{0\max}$ threshold voltage

Fast Diode


0.91

V


$R_{0\max}$ slope resistance *

6.1

mΩ

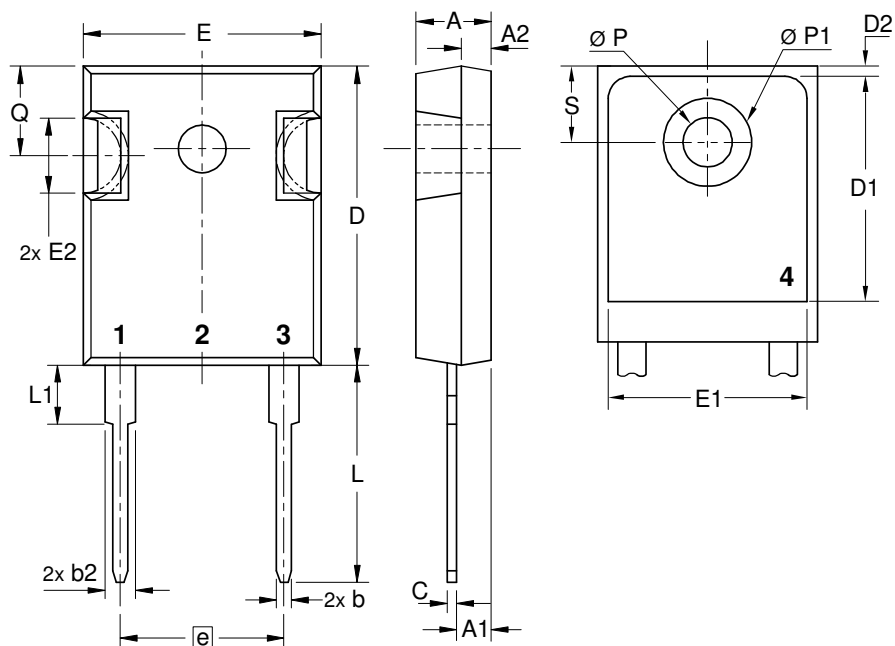Outlines TO-247


Sym.	Inches		Millimeter	
	min.	max.	min.	max.
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.430	BSC	10.92	BSC
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
Ø P	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242	BSC	6.14	BSC
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
Ø P1	-	0.29	-	7.39



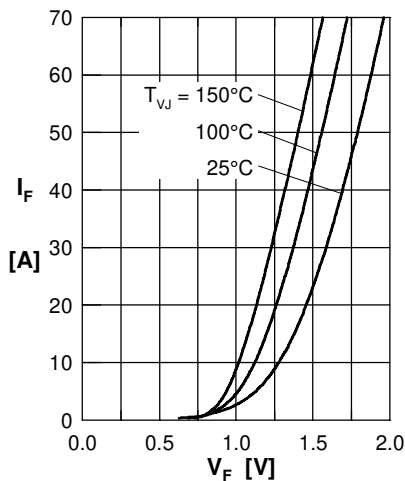
Fast Diode


Fig. 1 Forward current I_F versus V_F

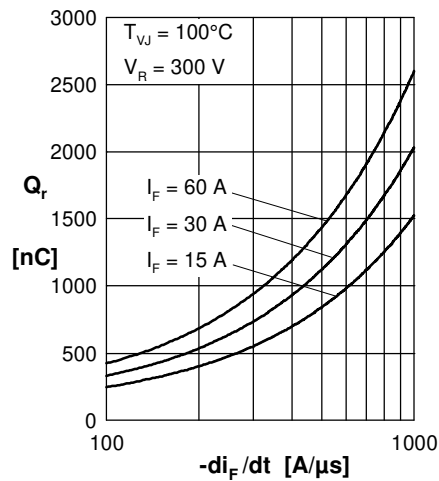


Fig. 2 Typ. reverse recov. charge Q_r versus $-di_F/dt$

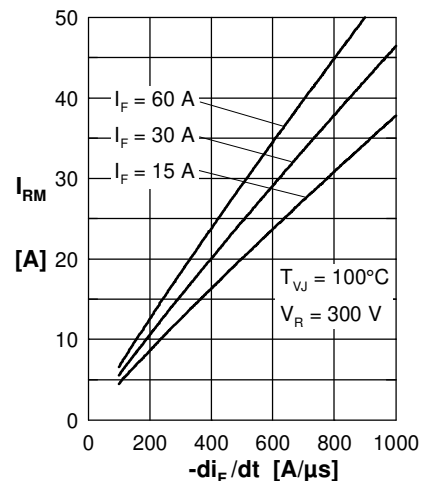


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

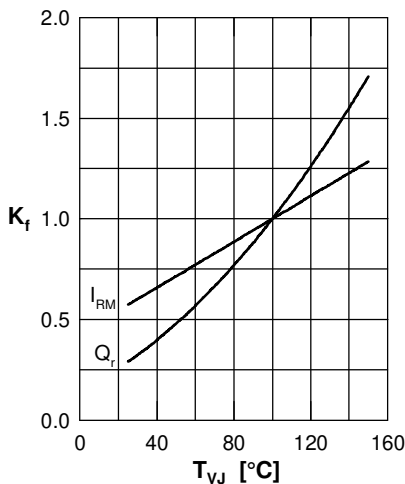


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

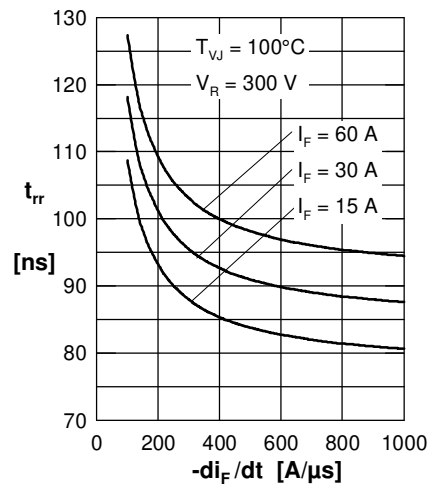


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

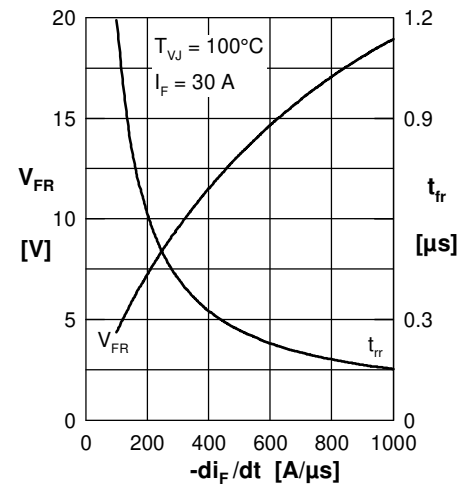


Fig. 6 Typ. peak forward voltage V_{FR} and t_{rr} versus di_F/dt

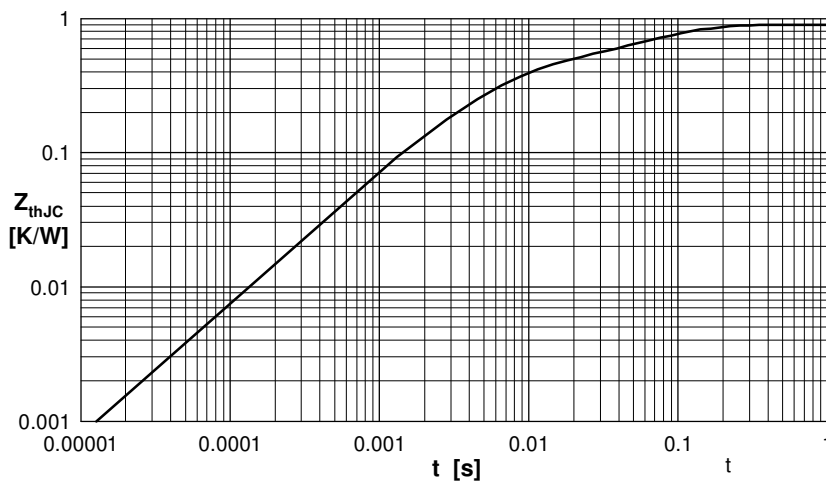


Fig. 7 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.030	0.001
2	0.080	0.030
3	0.300	0.006
4	0.490	0.060