




220V Down Light

- Surge protection > 1kV without a MOV
- Uniform dimming

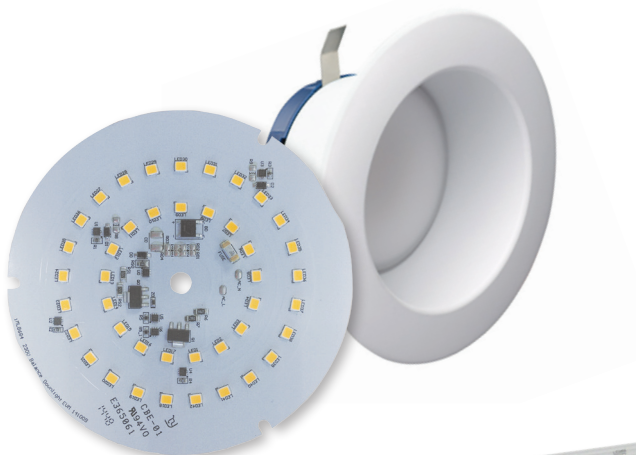

220V T8 Tube

- Uniform light output
- PF > 0.98 and THD < 20%
- Surge protection > 1kV without a MOV

iML8683/84 Features

- System
 - All solid state components
 - No magnetics or electrolytic capacitor required
 - No MOV required while maintaining >1kV surge immunity
 - Single board solution minimizes process flow and assembly cost
 - High PF and low THD performance
 - High efficacy
 - Wide range of LED forward voltages supported
 - Distributed heat to multiple packages improves thermal management
 - TRIAC dimmable
- Chip
 - 88V input voltage
 - < 3V dropout voltage for up to 150mA regulating current
 - 2mm x 2mm DFN6 package

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation conveys no license under any patent or other right and makes no representation that the circuits are free of patent infringement. While the information in this publication has been carefully checked, no responsibility, however, is assumed for inaccuracies.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited. Exar, XR and the XR logo are registered trademarks of Exar Corporation. All other trademarks are the property of their respective owners.

©2015 Exar Corporation



www.exar.com

48760 Kato Road
Fremont, CA 94538
USA

Tel.: +1 (510) 668-7000
Fax: +1 (510) 668-7001
Email: Support@exar.com

FLY032015_iML8683-8684