

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ Unless Otherwise Specified)                                                                     | Characteristic Values |      |                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|-------------------------|
|              |                                                                                                                                               | Min.                  | Typ. | Max.                    |
| $g_{fs}$     | $V_{DS} = 20\text{V}, I_D = 0.5 \cdot I_{D25}$ , Note 1                                                                                       | 14                    | 24   | S                       |
| $C_{iss}$    | $V_{GS} = 0\text{V}, V_{DS} = 25\text{V}, f = 1\text{MHz}$                                                                                    |                       | 2890 | pF                      |
| $C_{oss}$    |                                                                                                                                               |                       | 280  | pF                      |
| $C_{rss}$    |                                                                                                                                               |                       | 22   | pF                      |
| $t_{d(on)}$  | <b>Resistive Switching Times</b><br>$V_{GS} = 10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$<br>$R_G = 10\Omega$ (External) |                       | 15   | ns                      |
| $t_r$        |                                                                                                                                               |                       | 9    | ns                      |
| $t_{d(off)}$ |                                                                                                                                               |                       | 30   | ns                      |
| $t_f$        |                                                                                                                                               |                       | 5    | ns                      |
| $Q_{g(on)}$  | $V_{GS} = 10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$                                                                    |                       | 48   | nC                      |
| $Q_{gs}$     |                                                                                                                                               |                       | 13   | nC                      |
| $Q_{gd}$     |                                                                                                                                               |                       | 16   | nC                      |
| $R_{thJC}$   |                                                                                                                                               |                       |      | 0.26 $^\circ\text{C/W}$ |
| $R_{thCS}$   | TO-220                                                                                                                                        |                       | 0.50 | $^\circ\text{C/W}$      |
| $R_{thCS}$   | TO-3P & TO-247                                                                                                                                |                       | 0.25 | $^\circ\text{C/W}$      |


#### Source-Drain Diode

| Symbol   | Test Conditions<br>( $T_J = 25^\circ\text{C}$ Unless Otherwise Specified)                       | Characteristic Values |      |               |
|----------|-------------------------------------------------------------------------------------------------|-----------------------|------|---------------|
|          |                                                                                                 | Min.                  | Typ. | Max.          |
| $I_S$    | $V_{GS} = 0\text{V}$                                                                            |                       |      | 24 A          |
| $I_{SM}$ | Repetitive, Pulse Width Limited by $T_{JM}$                                                     |                       |      | 96 A          |
| $V_{SD}$ | $I_F = I_S, V_{GS} = 0\text{V}$ , Note 1                                                        |                       |      | 1.3 V         |
| $t_{rr}$ | $I_F = 12\text{A}, -di/dt = 100\text{A}/\mu\text{s}$<br>$V_R = 100\text{V}, V_{GS} = 0\text{V}$ |                       | 400  | ns            |
| $I_{RM}$ |                                                                                                 |                       | 19.6 | A             |
| $Q_{RM}$ |                                                                                                 |                       | 3.9  | $\mu\text{C}$ |


Note 1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.


|                                                                                  |           |           |           |           |              |              |              |              |              |             |
|----------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: | 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    | 7,005,734 B2 | 7,157,338B2 |
|                                                                                  | 4,850,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    | 7,063,975 B2 |             |
|                                                                                  | 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 | 7,071,537    |             |

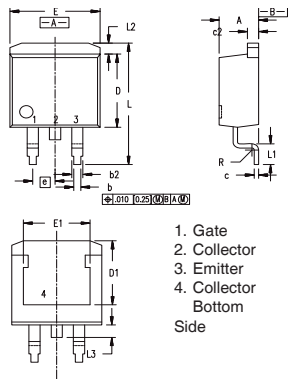**TO-263 (IXTA) Outline**


| Dim. | Millimeter |       | Inches |      |
|------|------------|-------|--------|------|
|      | Min.       | Max.  | Min.   | Max. |
| A    | 4.06       | 4.83  | .160   | .190 |
| b    | 0.51       | 0.99  | .020   | .039 |
| b2   | 1.14       | 1.40  | .045   | .055 |
| c    | 0.40       | 0.74  | .016   | .029 |
| c2   | 1.14       | 1.40  | .045   | .055 |
| D    | 8.64       | 9.65  | .340   | .380 |
| D1   | 8.00       | 8.89  | .280   | .320 |
| E    | 9.65       | 10.41 | .380   | .405 |
| E1   | 6.22       | 8.13  | .270   | .320 |
| e    | 2.54       | BSC   | .100   | BSC  |
| L    | 14.61      | 15.88 | .575   | .625 |
| L1   | 2.29       | 2.79  | .090   | .110 |
| L2   | 1.02       | 1.40  | .040   | .055 |
| L3   | 1.27       | 1.78  | .050   | .070 |
| L4   | 0          | 0.13  | 0      | .005 |


**TO-3P (IXTQ) Outline**


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .185     | .193 | 4.70        | 4.90  |
| A1  | .051     | .059 | 1.30        | 1.50  |
| A2  | .057     | .065 | 1.45        | 1.65  |
| b   | .035     | .045 | 0.90        | 1.15  |
| b2  | .075     | .087 | 1.90        | 2.20  |
| b4  | .114     | .126 | 2.90        | 3.20  |
| c   | .022     | .031 | 0.55        | 0.80  |
| D   | .780     | .799 | 19.80       | 20.30 |
| D1  | .665     | .677 | 16.90       | 17.20 |
| E   | .610     | .622 | 15.50       | 15.80 |
| E1  | .531     | .539 | 13.50       | 13.70 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .779     | .795 | 19.80       | 20.20 |
| L1  | .134     | .142 | 3.40        | 3.60  |
| ØP  | .126     | .134 | 3.20        | 3.40  |
| ØP1 | .272     | .280 | 6.90        | 7.10  |
| S   | .193     | .201 | 4.90        | 5.10  |

**TO-220 (IXTP) Outline**


Pins: 1 - Gate  
2 - Drain  
3 - Source


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .170     | .190 | 4.32        | 4.83  |
| b   | .025     | .040 | 0.64        | 1.02  |
| b1  | .045     | .065 | 1.15        | 1.65  |
| c   | .014     | .022 | 0.35        | 0.56  |
| D   | .580     | .630 | 14.73       | 16.00 |
| E   | .390     | .420 | 9.91        | 10.66 |
| e   | .100 BSC |      | 2.54 BSC    |       |
| F   | .045     | .055 | 1.14        | 1.40  |
| H1  | .230     | .270 | 5.85        | 6.85  |
| J1  | .090     | .110 | 2.29        | 2.79  |
| k   | 0        | .015 | 0           | 0.38  |
| L   | .500     | .550 | 12.70       | 13.97 |
| L1  | .110     | .230 | 2.79        | 5.84  |
| ØP  | .139     | .161 | 3.53        | 4.08  |
| Q   | .100     | .125 | 2.54        | 3.18  |

**TO-247 (IXTH) Outline**


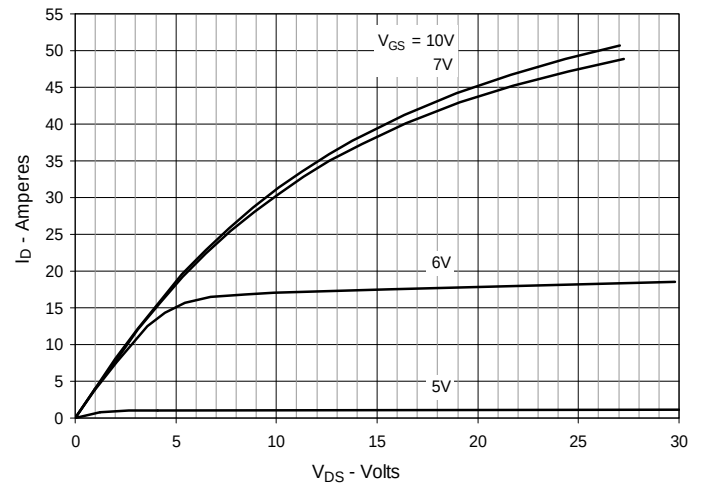
Terminals: 1 - Gate  
2 - Drain  
3 - Source

| Dim.           | Millimeter |       | Inches  |       |
|----------------|------------|-------|---------|-------|
|                | Min.       | Max.  | Min.    | Max.  |
| A              | 4.7        | 5.3   | .185    | .209  |
| A <sub>1</sub> | 2.2        | 2.54  | .087    | .102  |
| A <sub>2</sub> | 2.2        | 2.6   | .059    | .098  |
| b              | 1.0        | 1.4   | .040    | .055  |
| b <sub>1</sub> | 1.65       | 2.13  | .065    | .084  |
| b <sub>2</sub> | 2.87       | 3.12  | .113    | .123  |
| C              | .4         | .8    | .016    | .031  |
| D              | 20.80      | 21.46 | .819    | .845  |
| E              | 15.75      | 16.26 | .610    | .640  |
| e              | 5.20       | 5.72  | 0.205   | 0.225 |
| L              | 19.81      | 20.32 | .780    | .800  |
| L1             |            | 4.50  |         | .177  |
| ØP             | 3.55       | 3.65  | .140    | .144  |
| Q              | 5.89       | 6.40  | 0.232   | 0.252 |
| R              | 4.32       | 5.49  | .170    | .216  |
| S              | 6.15 BSC   |       | 242 BSC |       |


**Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$**

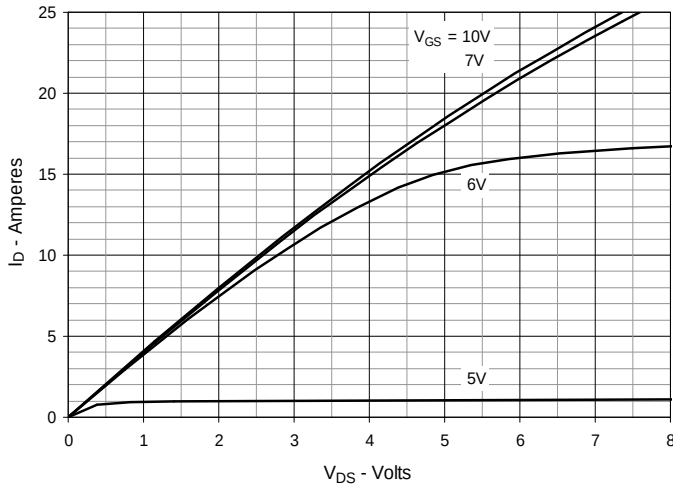


**Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$**




**Fig. 3. Output Characteristics @  $T_J = 125^\circ\text{C}$**

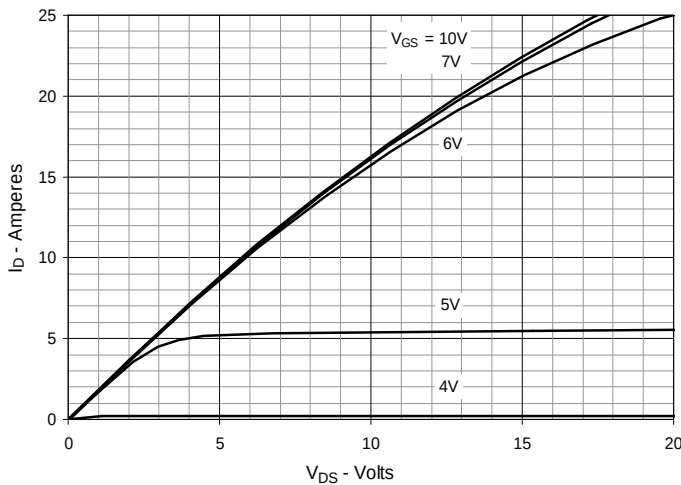


**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 12\text{A}$  Value vs. Junction Temperature**

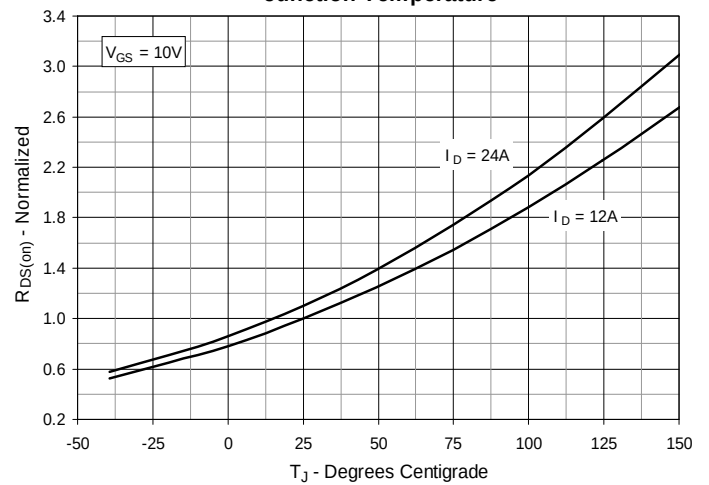


**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 12\text{A}$  Value vs. Drain Current**

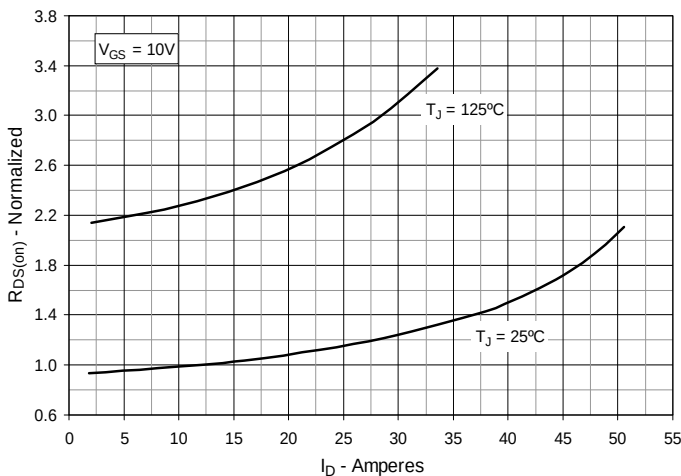


**Fig. 6. Maximum Drain Current vs. Case Temperature**

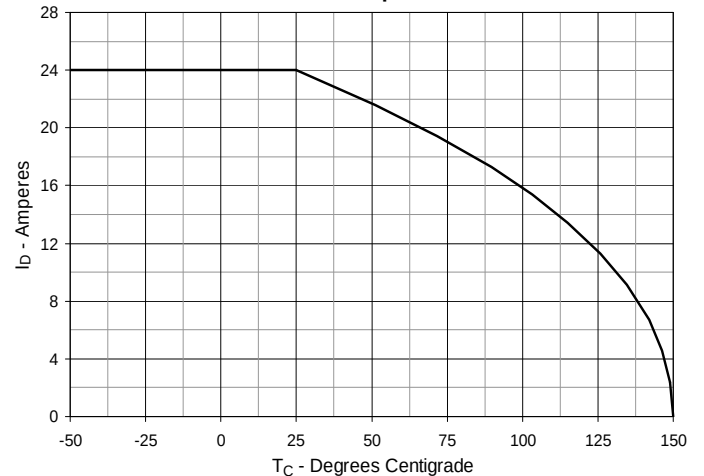


**Fig. 7. Input Admittance**

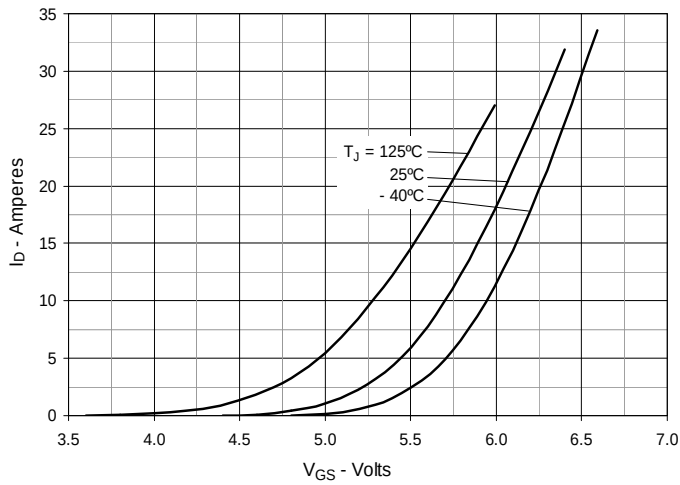


**Fig. 8. Transconductance**

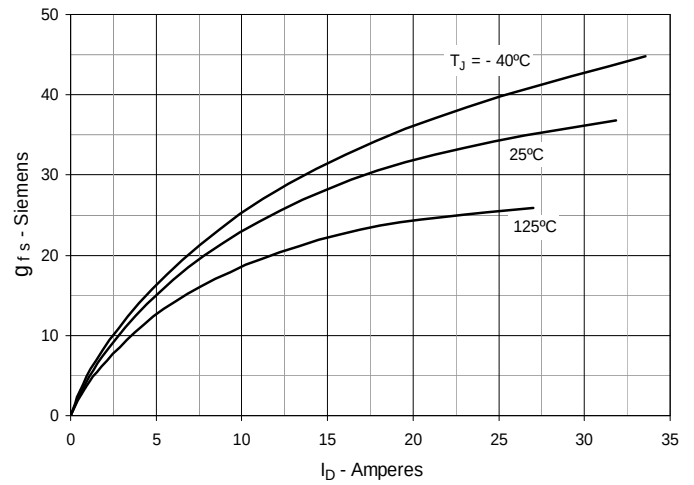


**Fig. 9. Forward Voltage Drop of Intrinsic Diode**

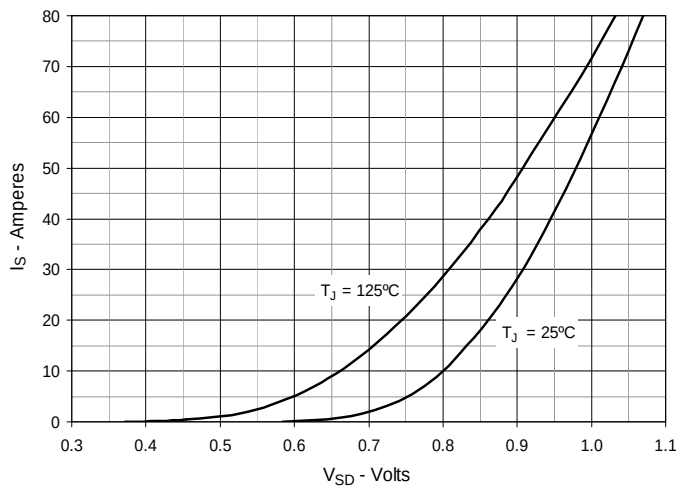

**Fig. 10. Gate Charge**

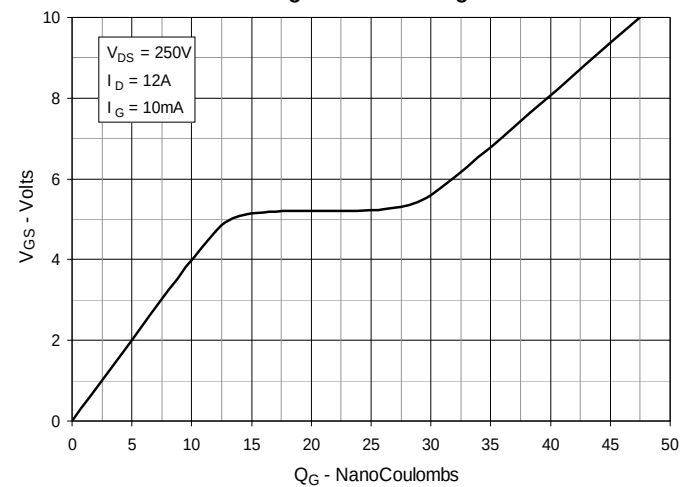

**Fig. 11. Capacitance**

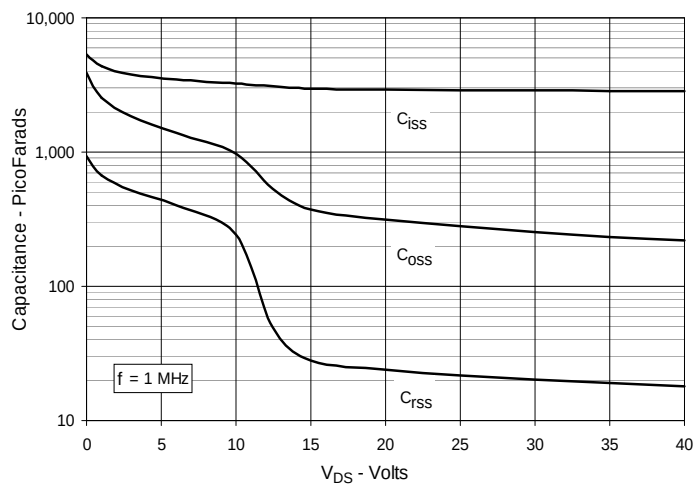

**Fig. 12. Forward-Bias Safe Operating Area**


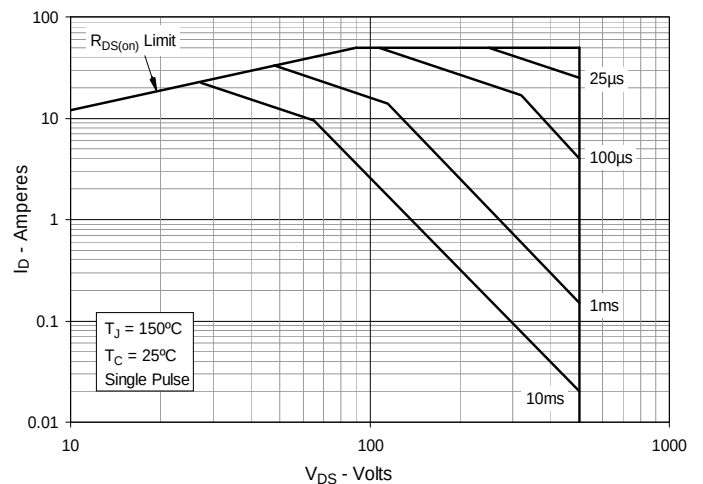


Fig. 13. Maximum Transient Thermal Impedance



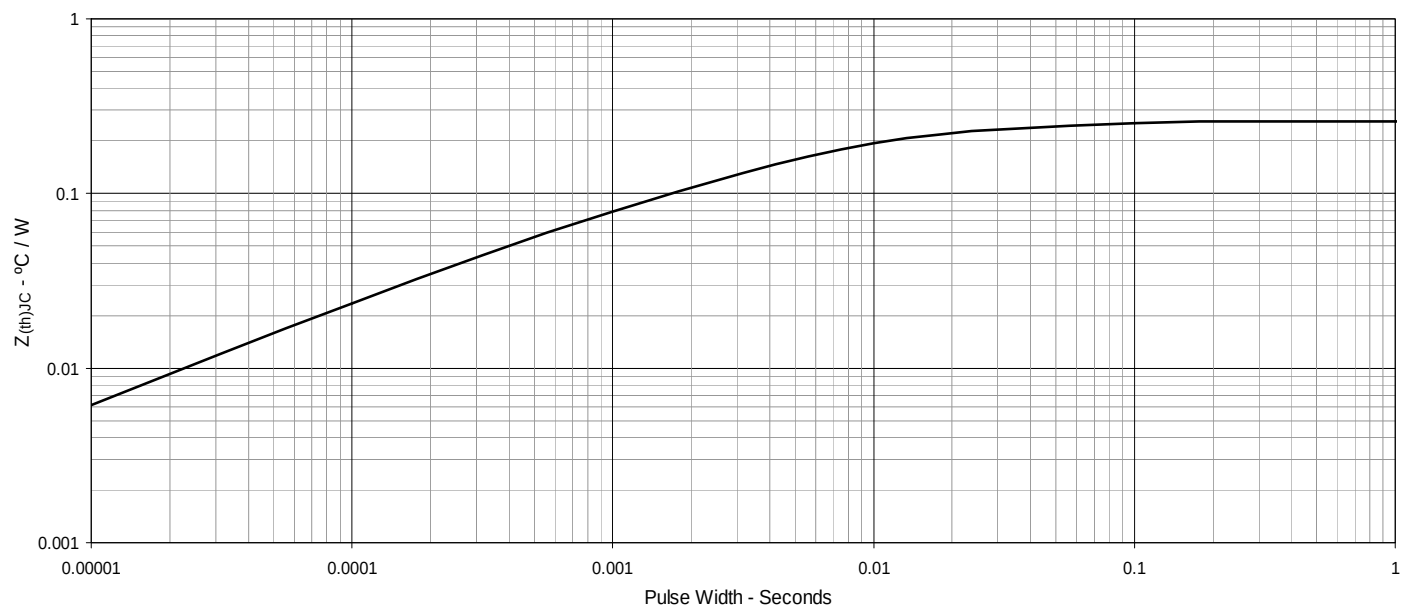

---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).