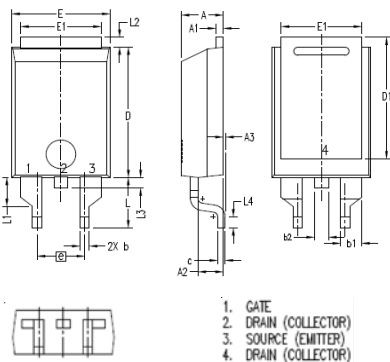


| Symbol       | Test Conditions                                                                             | Characteristic Values<br>( $T_j = 25^\circ\text{C}$ , unless otherwise specified) |      |                          |
|--------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|--------------------------|
|              |                                                                                             | Min.                                                                              | Typ. | Max.                     |
| $g_{fs}$     | $V_{DS} = 20\text{ V}; I_D = 0.5 I_{D25}$ , pulse test                                      | 9                                                                                 | 16   | S                        |
| $C_{iss}$    | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$                               |                                                                                   | 2500 | pF                       |
| $C_{oss}$    |                                                                                             |                                                                                   | 278  | pF                       |
| $C_{rss}$    |                                                                                             |                                                                                   | 23   | pF                       |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 V_{DSS}, I_D = I_{D25}$<br>$R_G = 5\ \Omega$ (External) |                                                                                   | 21   | ns                       |
| $t_r$        |                                                                                             |                                                                                   | 22   | ns                       |
| $t_{d(off)}$ |                                                                                             |                                                                                   | 62   | ns                       |
| $t_f$        |                                                                                             |                                                                                   | 22   | ns                       |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25}$                             |                                                                                   | 49   | nC                       |
| $Q_{gs}$     |                                                                                             |                                                                                   | 15   | nC                       |
| $Q_{gd}$     |                                                                                             |                                                                                   | 17   | nC                       |
| $R_{thJC}$   | (TO-3P, PLUS220)                                                                            |                                                                                   | 0.21 | $0.35\ ^\circ\text{C/W}$ |
| $R_{thCS}$   |                                                                                             |                                                                                   |      | $^\circ\text{C/W}$       |


| Source-Drain Diode |                                                                                                       | Characteristic Values<br>( $T_j = 25^\circ\text{C}$ , unless otherwise specified) |      |       |
|--------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|-------|
| Symbol             | Test Conditions                                                                                       | Min.                                                                              | Typ. | Max.  |
| $I_S$              | $V_{GS} = 0\text{ V}$                                                                                 |                                                                                   |      | 18 A  |
| $I_{SM}$           | Repetitive                                                                                            |                                                                                   |      | 54 A  |
| $V_{SD}$           | $I_F = I_S, V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$ |                                                                                   |      | 1.5 V |
| $t_{rr}$           | $I_F = 18\text{ A}, -di/dt = 100\text{ A}/\mu\text{s}$<br>$V_R = 100\text{ V}$                        |                                                                                   | 500  | ns    |

## PLUS220SMD (IXTV\_S) Outline


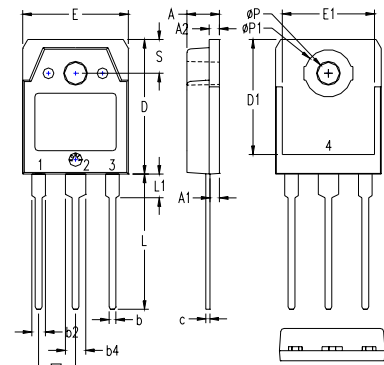
| SYM | INCHES   |      | MILLIMETER |       |
|-----|----------|------|------------|-------|
|     | MIN      | MAX  | MIN        | MAX   |
| A   | .169     | .185 | 4.30       | 4.70  |
| A1  | .028     | .035 | 0.70       | 0.90  |
| A2  | .098     | .118 | 2.50       | 3.00  |
| A3  | .000     | .010 | 0.00       | 0.25  |
| b   | .035     | .047 | 0.90       | 1.20  |
| b1  | .080     | .095 | 2.03       | 2.41  |
| b2  | .054     | .064 | 1.37       | 1.63  |
| c   | .028     | .035 | 0.70       | 0.90  |
| D   | .551     | .591 | 14.00      | 15.00 |
| D1  | .512     | .539 | 13.00      | 13.70 |
| E   | .394     | .433 | 10.00      | 11.00 |
| E1  | .331     | .346 | 8.40       | 8.80  |
| e   | .200 BSC |      | 5.08 BSC   |       |
| L   | .209     | .228 | 5.30       | 5.80  |
| L1  | .118     | .138 | 3.00       | 3.50  |
| L2  | .035     | .051 | 0.90       | 1.30  |
| L3  | .047     | .059 | 1.20       | 1.50  |
| L4  | .039     | .059 | 1.00       | 1.50  |


## TO-3P (IXTQ) Outline



- 1 - GATE
- 2 - DRAIN (COLLECTOR)
- 3 - SOURCE (EMITTER)
- 4 - DRAIN (COLLECTOR)

| SYM       | INCHES   |      | MILLIMETERS |       |
|-----------|----------|------|-------------|-------|
|           | MIN      | MAX  | MIN         | MAX   |
| A         | .185     | .193 | 4.70        | 4.90  |
| A1        | .051     | .059 | 1.30        | 1.50  |
| A2        | .057     | .065 | 1.45        | 1.65  |
| b         | .035     | .045 | 0.90        | 1.15  |
| b2        | .075     | .087 | 1.90        | 2.20  |
| b4        | .114     | .126 | 2.90        | 3.20  |
| c         | .022     | .031 | 0.55        | 0.80  |
| D         | .780     | .799 | 19.80       | 20.30 |
| D1        | .665     | .677 | 16.90       | 17.20 |
| E         | .610     | .622 | 15.50       | 15.80 |
| E1        | .531     | .539 | 13.50       | 13.70 |
| e         | .215 BSC |      | 5.45 BSC    |       |
| L         | .779     | .795 | 19.80       | 20.20 |
| L1        | .134     | .142 | 3.40        | 3.60  |
| $\phi P$  | .126     | .134 | 3.20        | 3.40  |
| $\phi P1$ | .272     | .280 | 6.90        | 7.10  |
| S         | .193     | .201 | 4.90        | 5.10  |

## PLUS220 (IXTV) Outline

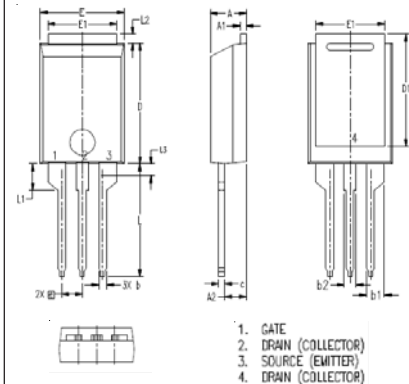


| SYM | INCHES   |      | MILLIMETER |       |
|-----|----------|------|------------|-------|
|     | MIN      | MAX  | MIN        | MAX   |
| A   | .169     | .185 | 4.30       | 4.70  |
| A1  | .028     | .035 | 0.70       | 0.90  |
| A2  | .098     | .118 | 2.50       | 3.00  |
| b   | .035     | .047 | 0.90       | 1.20  |
| b1  | .080     | .095 | 2.03       | 2.41  |
| b2  | .054     | .064 | 1.37       | 1.63  |
| c   | .028     | .035 | 0.70       | 0.90  |
| D   | .551     | .591 | 14.00      | 15.00 |
| D1  | .512     | .539 | 13.00      | 13.70 |
| E   | .394     | .433 | 10.00      | 11.00 |
| E1  | .331     | .346 | 8.40       | 8.80  |
| e   | .100 BSC |      | 2.54 BSC   |       |
| L   | .512     | .551 | 13.00      | 14.00 |
| L1  | .118     | .138 | 3.00       | 3.50  |
| L2  | .035     | .051 | 0.90       | 1.30  |
| L3  | .047     | .059 | 1.20       | 1.50  |


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585  
one or more of the following U.S. patents: 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692  
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2


**Fig. 1. Output Characteristics**  
@ 25°C

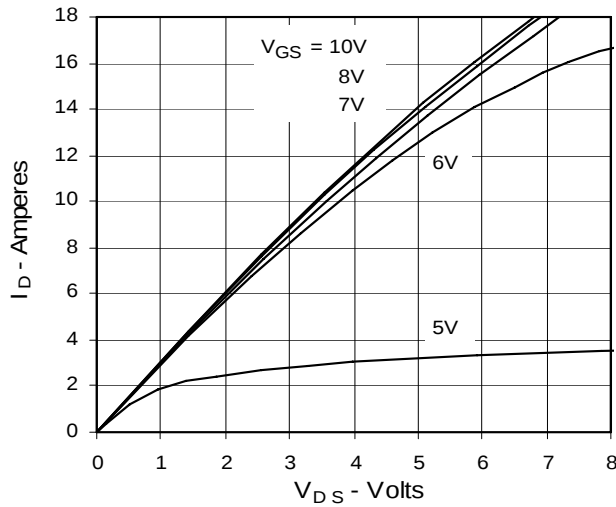


**Fig. 2. Output Characteristics**  
@ 125°C

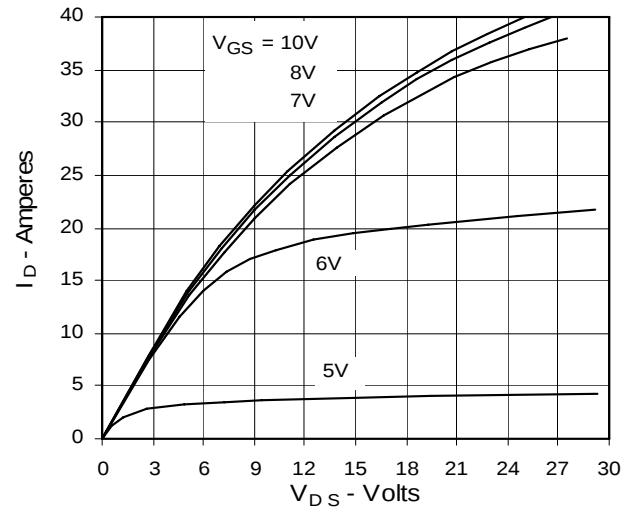


**Fig. 3. Output Characteristics**  
@ 125°C

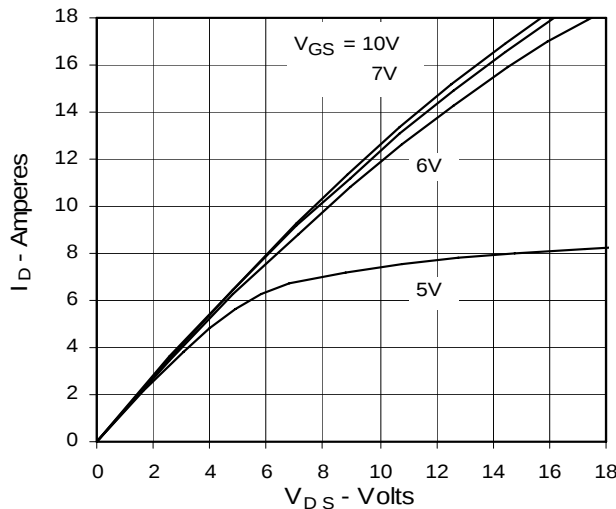


**Fig. 4.  $R_{DS(on)}$  Normalized to 0.5  $I_{D25}$  Value vs. Junction Temperature**

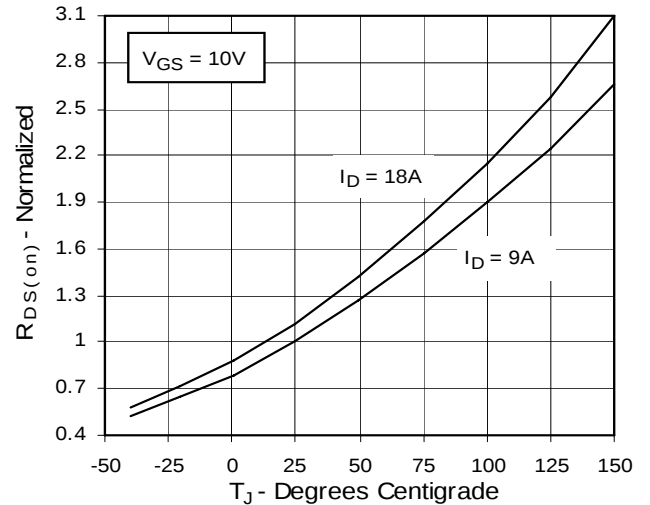

**Fig. 5.  $R_{DS(on)}$  Normalized to 0.5  $I_{D25}$  Value vs.  $I_D$**

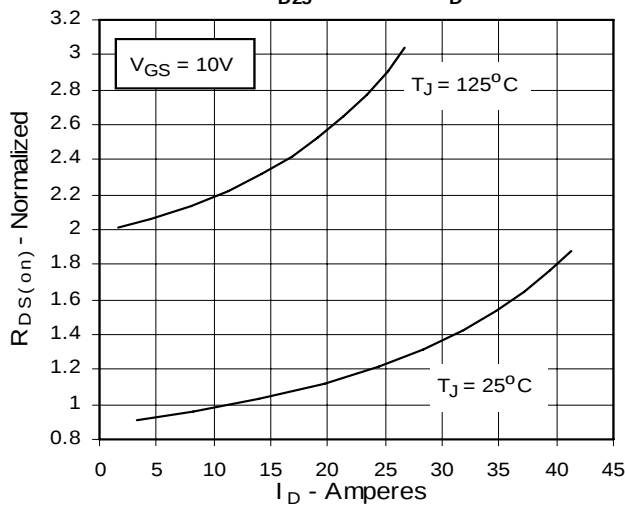

**Fig. 6. Drain Current vs. Case Temperature**

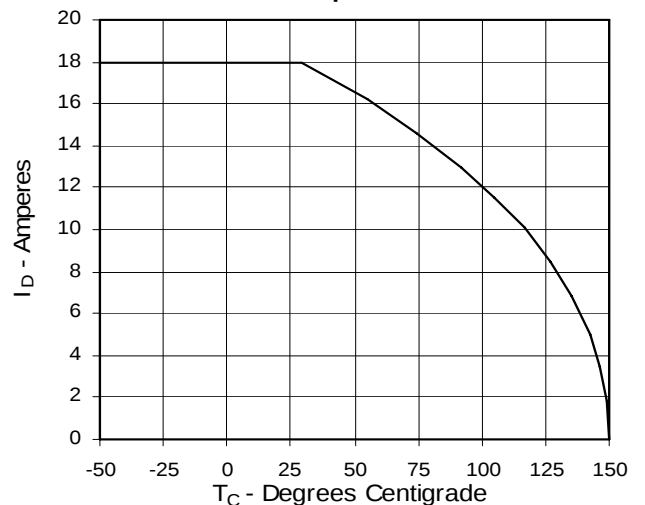

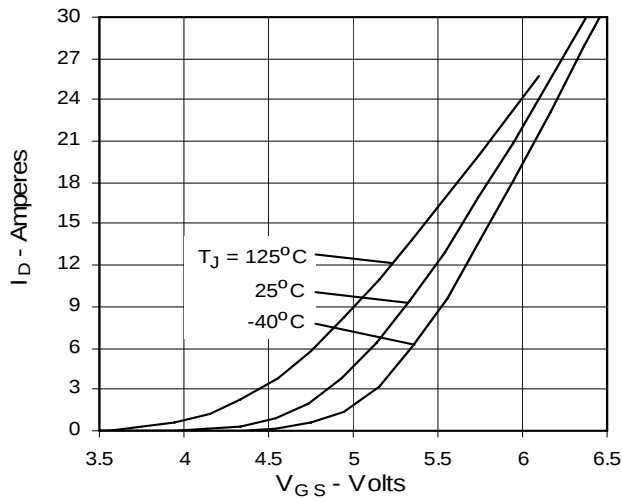
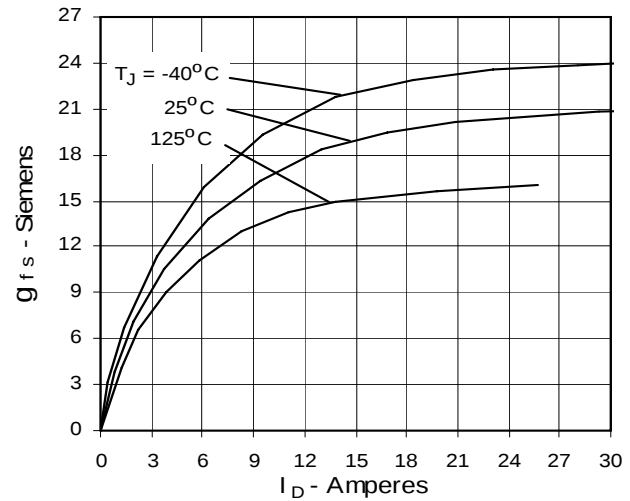
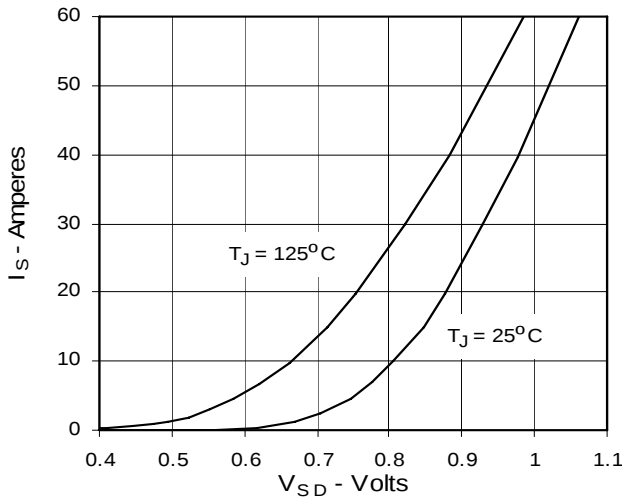
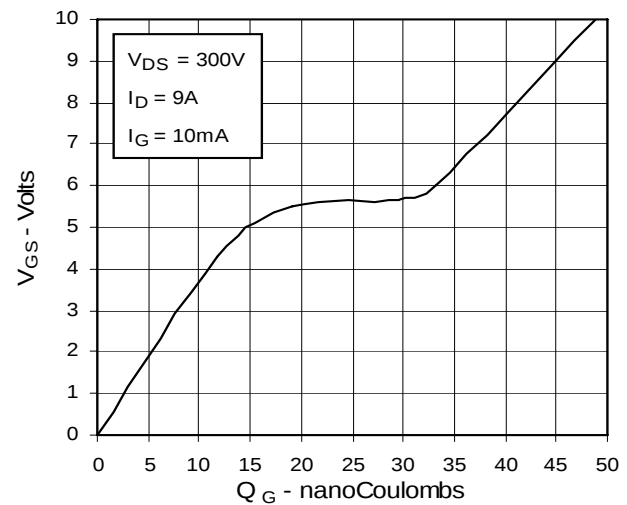
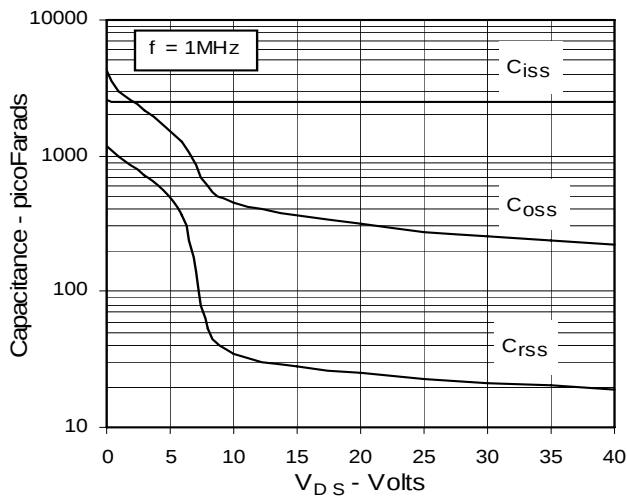
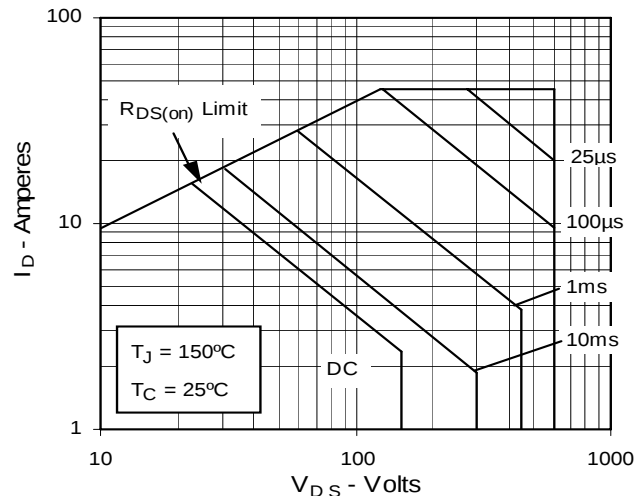
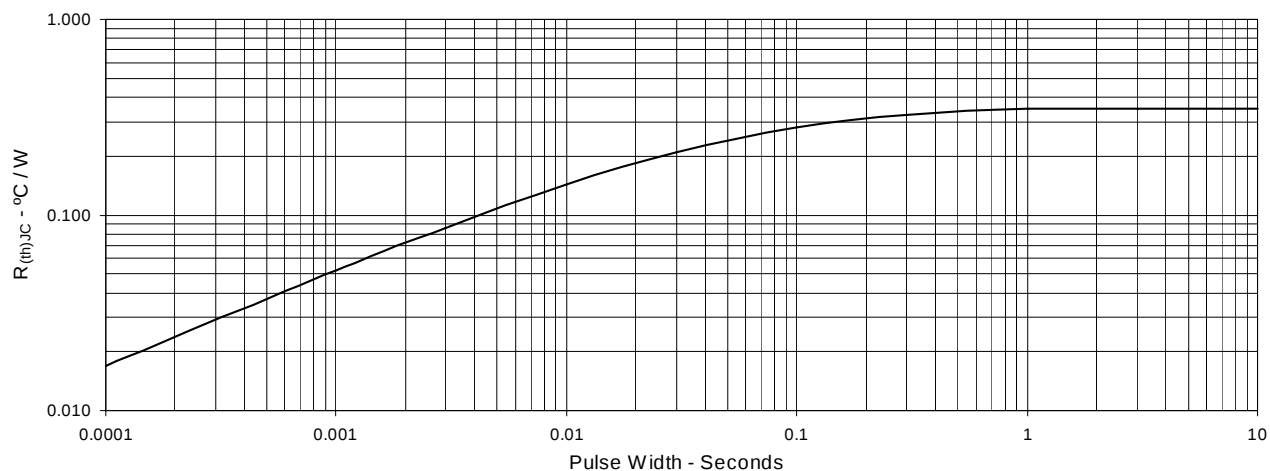
**Fig. 7. Input Admittance**

**Fig. 8. Transconductance**

**Fig. 9. Source Current vs. Source-To-Drain Voltage**

**Fig. 10. Gate Charge**

**Fig. 11. Capacitance**

**Fig. 12. Forward-Bias Safe Operating Area**


Fig. 13. Maximum Transient Thermal Resistance





---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).