

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V_{CC})	6V
Input Voltage	
Driver	-0.3V to $V_{CC} + 0.3V$
Receiver	-25V to 25V
Digital Input.....	-0.3V to $V_{CC} + 0.3V$
Output Voltage	
Driver	-25V to 25V
Receiver	-0.3V to $V_{CC} + 0.3V$
Short-Circuit Duration	
V^+	30 sec
V^-	30 sec
Driver Output	Indefinite
Receiver Output	Indefinite
Operating Temperature Range	
LTC1383C	0°C to 70°C
LTC1383I	-40°C to 85°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

TOP VIEW	ORDER PART NUMBER
	LTC1383CN
	LTC1383CS
	LTC1383IN
	LTC1383IS
N PACKAGE 16-LEAD PDIP	
S PACKAGE 16-LEAD PLASTIC SO	
$T_{JMAX} = 125^\circ\text{C}, \theta_{JA} = 70^\circ\text{C/W (N)}$	
$T_{JMAX} = 125^\circ\text{C}, \theta_{JA} = 90^\circ\text{C/W (S)}$	

Consult LTC Marketing for parts specified with wider operating temperature ranges.

DC ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. $V_{CC} = 5\text{V}$, $C1 = C2 = C3 = C4 = 0.1\mu\text{F}$, unless noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Any Driver					
Output Voltage Swing	3k to GND	Positive Negative	● 5.0 ● -5.0	7.0 -6.5	V
Logic Input Voltage Level	Input Low Level ($V_{OUT} = \text{High}$) Input High Level ($V_{OUT} = \text{Low}$)	● 1.4 ● 2.0	0.8 1.4	0.8	V
Logic Input Current	$V_{IN} = V_{CC}$ $V_{IN} = 0\text{V}$	● 5 ● -20	5 -40	5	μA
Output Short-Circuit Current	$V_{OUT} = 0\text{V}$		±9	±12	mA
Any Receiver					
Input Voltage Thresholds	Input Low Threshold Input High Threshold	● 0.8 ● 1.7	1.3 2.4	2.4	V
Hysteresis		● 0.1	0.4	1	V
Input Resistance	$-10\text{V} \leq V_{IN} \leq 10\text{V}$	3	5	7	$\text{k}\Omega$
Output Voltage	Output Low, $I_{OUT} = -1.6\text{mA}$ ($V_{CC} = 5\text{V}$) Output High, $I_{OUT} = 160\mu\text{A}$ ($V_{CC} = 5\text{V}$)	● 3.0 ● 3.0	0.2 3.2	0.4	V
Output Short-Circuit Current	Sinking Current, $V_{OUT} = V_{CC}$ Sourcing Current $V_{OUT} = 0\text{V}$	-15 10	-40 20	-40	mA
Power Supply Generator					
V^+ Output Voltage	$I_{OUT} = 0\text{mA}$ $I_{OUT} = 8\text{mA}$		8.0 7.5	8.0	V
V^- Output Voltage	$I_{OUT} = 0\text{mA}$ $I_{OUT} = -8\text{mA}$		-8.0 -7.0	-8.0	V

DC ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. $V_{CC} = 5\text{V}$, $C1 = C2 = C3 = C4 = 0.1\mu\text{F}$, unless noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Power Supply					
V _{CC} Supply Current	No Load (Note 2), 0°C to 70°C	●	0.22	0.5	mA
	No Load (Note 2), -40°C to 85°C	●	0.35	1.0	mA
Digital Input Threshold Low		●	1.4	0.8	V
Digital Input Threshold High		●	2.0	1.4	V


AC CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. $V_{CC} = 5\text{V}$, $C1 = C2 = C3 = C4 = 0.1\mu\text{F}$, unless noted.


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Slew Rate	$R_L = 3\text{k}$, $C_L = 51\text{pF}$ $R_L = 3\text{k}$, $C_L = 2500\text{pF}$	3	8 5	30	V/ μs V/ μs
Driver Propagation Delay (TTL to RS232)	t_{HLD} (Figure 1) t_{LHD} (Figure 1)	● ●	2 2	3.5 3.5	μs μs
Receiver Propagation Delay (RS232 to TTL)	t_{HLR} (Figure 2) t_{LHR} (Figure 2)	● ●	0.3 0.3	0.8 0.8	μs μs

Note 1: Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.


Note 2: Supply current is measured with driver and receiver outputs unloaded.

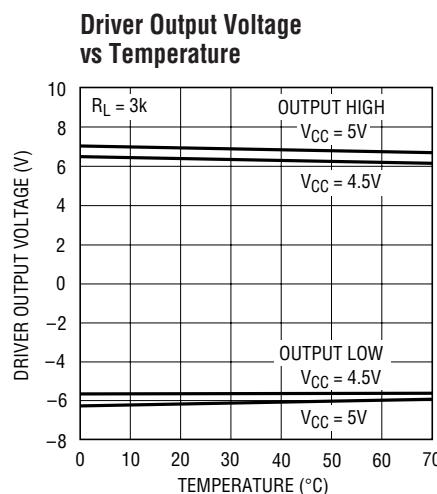TYPICAL PERFORMANCE CHARACTERISTICS

LTC1383 • TPC01



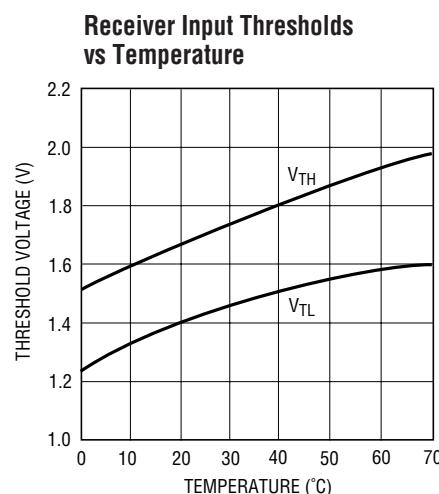


LTC1383 • TPC02

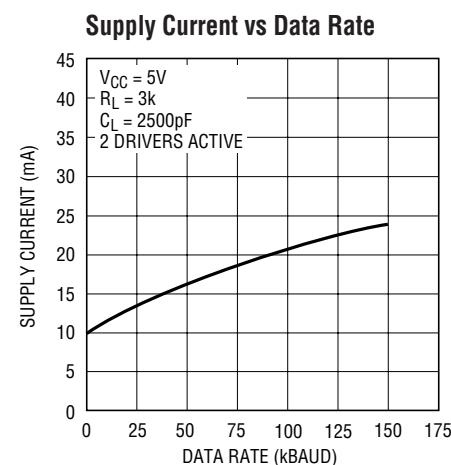

LTC1383 • TPC03

TYPICAL PERFORMANCE CHARACTERISTICS

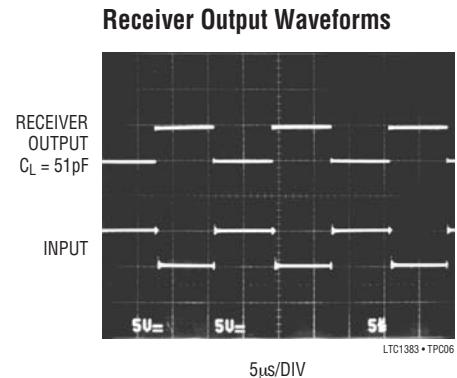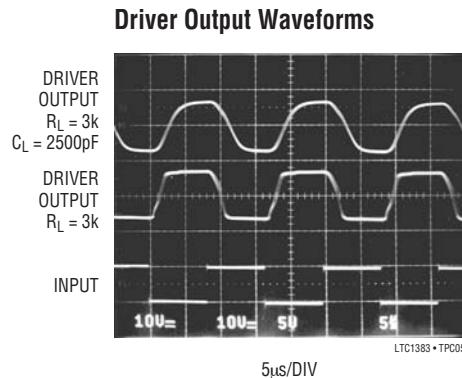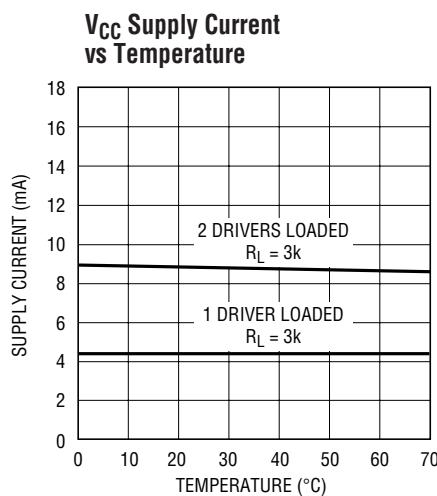

PIN FUNCTIONS

V_{CC}: 5V Input Supply Pin. This pin should be decoupled with a $0.1\mu\text{F}$ ceramic capacitor.

GND: Ground Pin.

V⁺: Positive Supply Output (RS232 Drivers). $V^+ \approx 2V_{CC} - 2V$. This pin requires an external capacitor $C = 0.1\mu\text{F}$ for charge storage. The capacitor may be tied to ground or V_{CC} . With multiple devices, the V^+ and V^- pins may share a common capacitor. For large numbers of devices, increasing the size of the shared common storage capacitors is recommended to reduce ripple.

V⁻: Negative Supply Output (RS232 Drivers). $V^- \approx -(2V_{CC} - 2V)$. This pin requires an external capacitor $C = 0.1\mu\text{F}$ for charge storage.

C1⁺, C1⁻, C2⁺, C2⁻: Commutating Capacitor Inputs. These pins require two external capacitors $C = 0.1\mu\text{F}$: one from $C1^+$ to $C1^-$ and another from $C2^+$ to $C2^-$. To maintain

charge pump efficiency, the capacitor's effective series resistance should be less than 2Ω .

TR IN: RS232 Driver Input Pins. Inputs are TTL/CMOS compatible. The inputs of unused drivers can be left unconnected since 300k input pull-up resistors to V_{CC} are included on chip.

TR OUT: Driver Outputs at RS232 Voltage Levels. The driver outputs are protected against ESD to $\pm 10\text{kV}$ for human body model discharges.

RX IN: Receiver Inputs. These pins can be forced to $\pm 25\text{V}$ without damage. The receiver inputs are protected against ESD to $\pm 10\text{kV}$ for human body model discharges. Each receiver provides 0.4V of hysteresis for noise immunity.

RX OUT: Receiver Outputs with TTL/CMOS Voltage Levels.

SWITCHING TIME WAVEFORMS

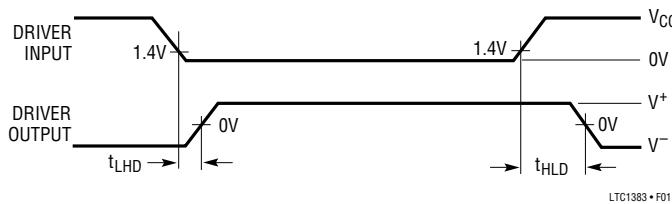


Figure 1. Driver Propagation Delay Timing


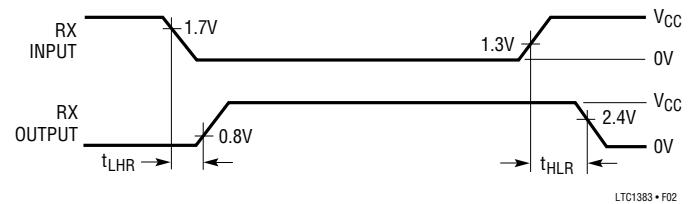



Figure 2. Receiver Propagation Delay Timing

TEST CIRCUITS


Driver Timing Test Load

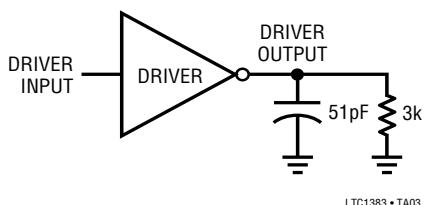

Receiver Timing Test Load

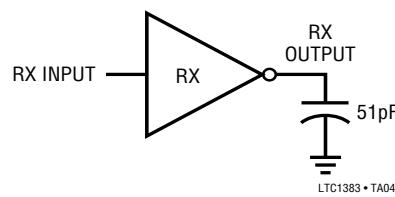


ESD Test Circuit

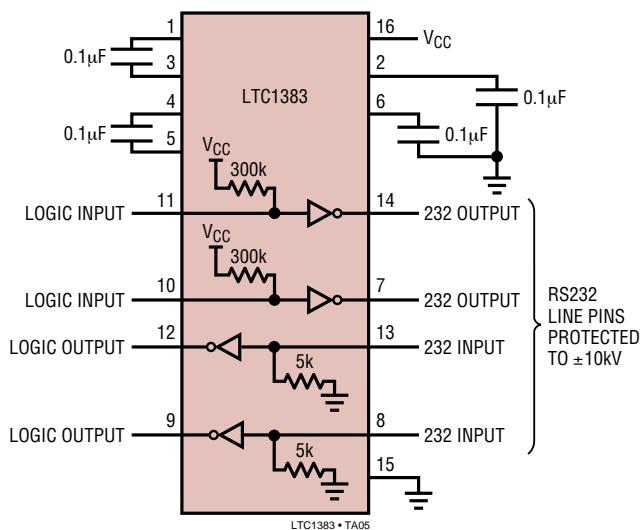


TYPICAL APPLICATIONS

Paralleling Power Supply Generator
with Common Storage Capacitors

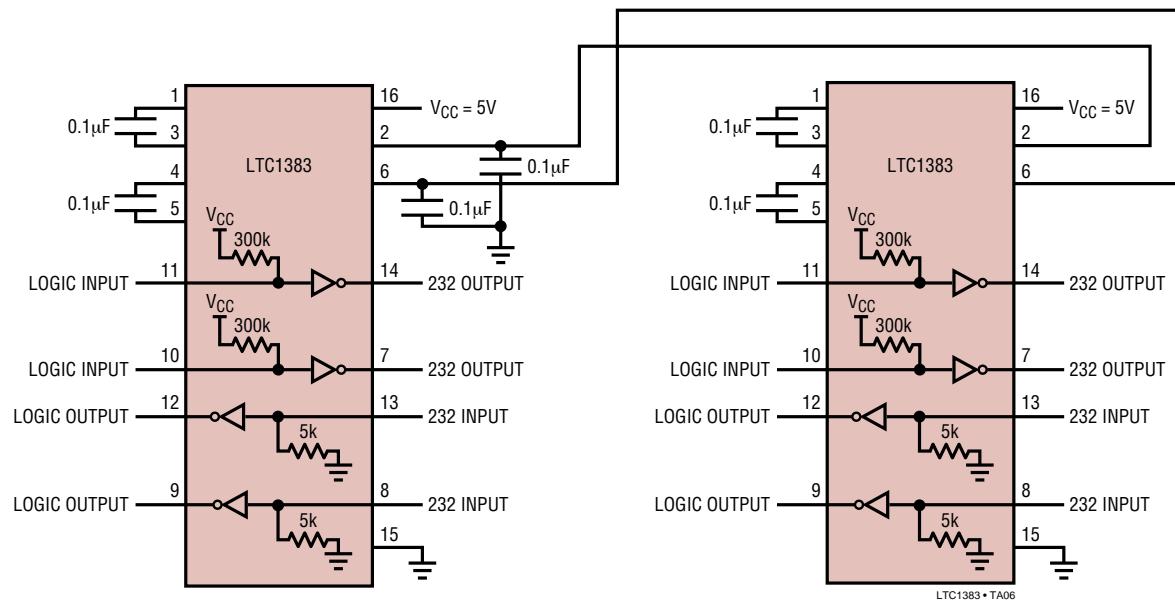

PACKAGE DESCRIPTION

N Package
16-Lead PDIP (Narrow .300 Inch)
(Reference LTC DWG # 05-08-1510)

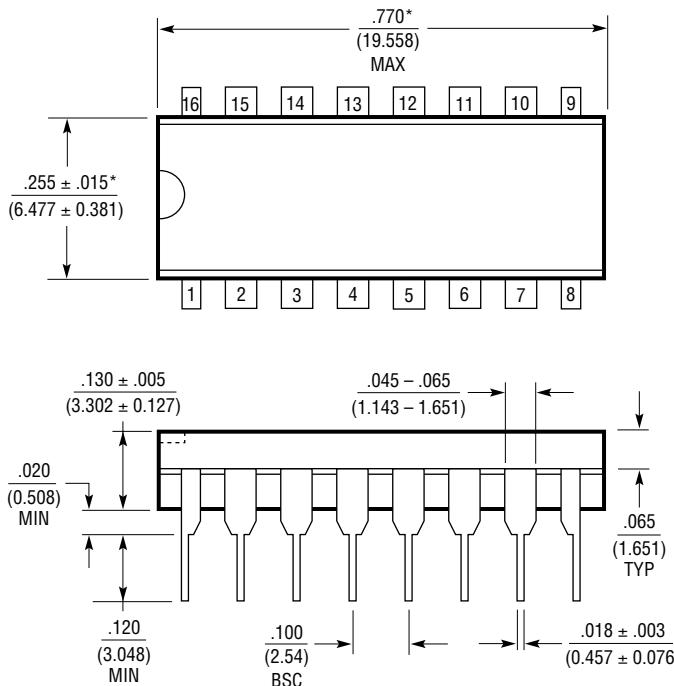


NOTE:

1. DIMENSIONS ARE INCHES
MILLIMETERS*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

N16 1002

PACKAGE DESCRIPTION

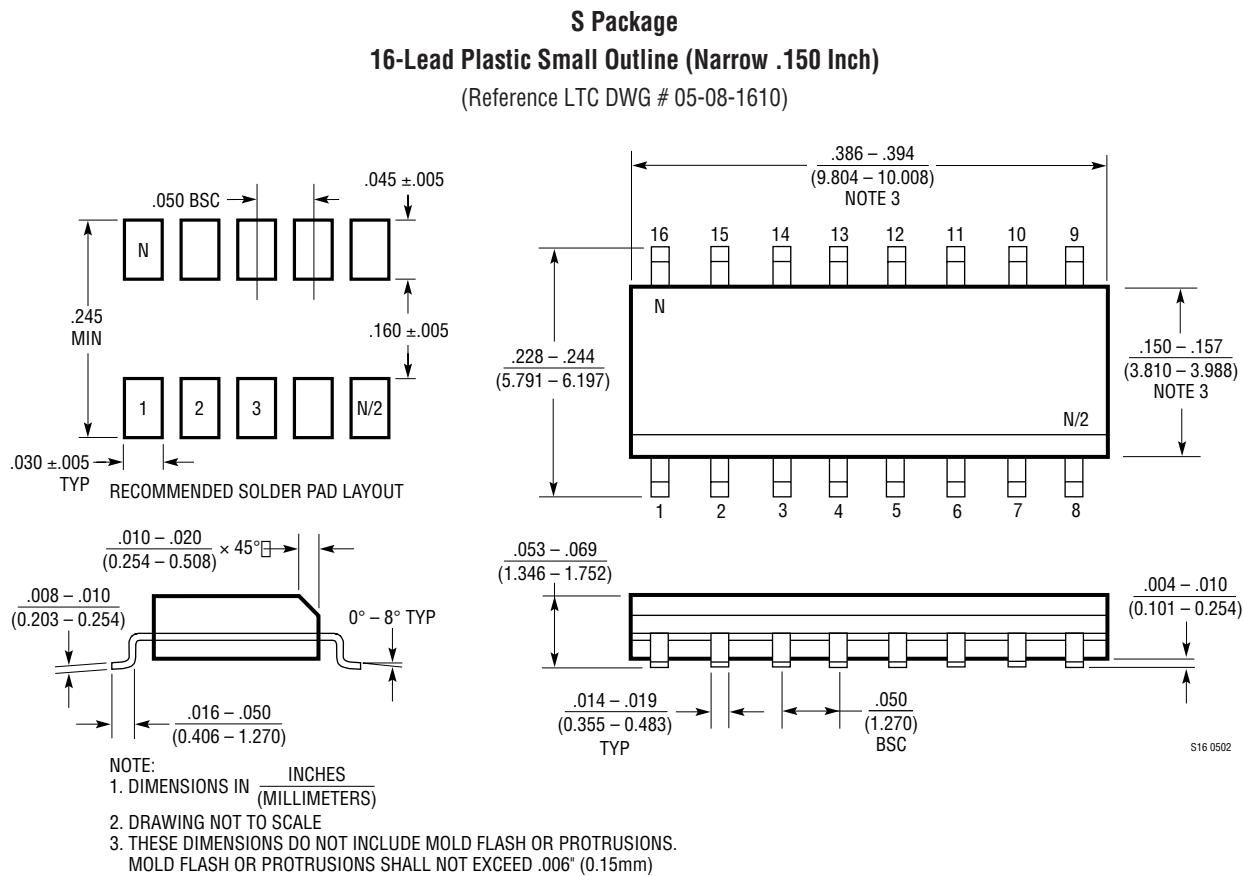

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1380/LTC1781	5V, 2 Driver, 2 Receiver RS232 Transceivers	±15kV ESD per IEC 1000-4
LTC1382	5V, 2 Driver, 2 Receiver RS232 Transceiver	220µA Supply Current, 0.2µA in Shutdown
LTC1384	5V, 2 Driver, 2 Receiver RS232 Transceiver	220µA Supply Current, 2 Receivers Active in Shutdown
LTC1385	3.3V, 2 Driver, 2 Receiver RS562 Transceiver	220µA Supply Current, 2 Receivers Active in Shutdown
LTC1386	3.3V, 2 Driver, 2 Receiver RS562 Transceiver	220µA Supply Current, Narrow 16-pin SO