

## MC7900 Series

### MAXIMUM RATINGS (T<sub>A</sub> = +25°C, unless otherwise noted.)

| Rating                                                                                                                                                                                                                                                                                    | Symbol                                                                                                           | Value                                                                  | Unit                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------|
| Input Voltage (–5.0 V ≥ V <sub>O</sub> ≥ –18 V)<br>(24 V)                                                                                                                                                                                                                                 | V <sub>I</sub>                                                                                                   | –35<br>–40                                                             | Vdc                                        |
| Power Dissipation<br>Case 221A<br>T <sub>A</sub> = +25°C<br>Thermal Resistance, Junction-to-Ambient<br>Thermal Resistance, Junction-to-Case<br>Case 936 (D <sup>2</sup> PAK)<br>T <sub>A</sub> = +25°C<br>Thermal Resistance, Junction-to-Ambient<br>Thermal Resistance, Junction-to-Case | P <sub>D</sub><br>θ <sub>JA</sub><br>θ <sub>JC</sub><br><br>P <sub>D</sub><br>θ <sub>JA</sub><br>θ <sub>JC</sub> | Internally Limited<br>65<br>5.0<br><br>Internally Limited<br>70<br>5.0 | W<br>°C/W<br>°C/W<br><br>W<br>°C/W<br>°C/W |
| Storage Junction Temperature Range                                                                                                                                                                                                                                                        | T <sub>stg</sub>                                                                                                 | –65 to +150                                                            | °C                                         |
| Junction Temperature                                                                                                                                                                                                                                                                      | T <sub>J</sub>                                                                                                   | +150                                                                   | °C                                         |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

\*This device series contains ESD protection and exceeds the following tests:

Human Body Model 2000 V per MIL\_STD\_883, Method 3015

Machine Model Method 200 V

### MC7905B, MC7905C

#### ELECTRICAL CHARACTERISTICS (V<sub>I</sub> = –10 V, I<sub>O</sub> = 500 mA, T<sub>low</sub>\* < T<sub>J</sub> < +125°C, unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                | Symbol                         | Min              | Typ                     | Max                   | Unit  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------|-------------------------|-----------------------|-------|
| Output Voltage (T <sub>J</sub> = +25°C)                                                                                                                                                                                                                                                        | V <sub>O</sub>                 | –4.8             | –5.0                    | –5.2                  | Vdc   |
| Line Regulation (Note 1)<br>(T <sub>J</sub> = +25°C, I <sub>O</sub> = 100 mA)<br>–7.0 Vdc ≥ V <sub>I</sub> ≥ –25 Vdc<br>–8.0 Vdc ≥ V <sub>I</sub> ≥ –12 Vdc<br>(T <sub>J</sub> = +25°C, I <sub>O</sub> = 500 mA)<br>–7.0 Vdc ≥ V <sub>I</sub> ≥ –25 Vdc<br>–8.0 Vdc ≥ V <sub>I</sub> ≥ –12 Vdc | Reg <sub>line</sub>            | –<br>–<br>–<br>– | 7.0<br>2.0<br>35<br>8.0 | 50<br>25<br>100<br>50 | mV    |
| Load Regulation, T <sub>J</sub> = +25°C (Note 1)<br>5.0 mA ≤ I <sub>O</sub> ≤ 1.5 A<br>250 mA ≤ I <sub>O</sub> ≤ 750 mA                                                                                                                                                                        | Reg <sub>load</sub>            | –<br>–           | 11<br>4.0               | 100<br>50             | mV    |
| Output Voltage<br>–7.0 Vdc ≥ V <sub>I</sub> ≥ –20 Vdc, 5.0 mA ≤ I <sub>O</sub> ≤ 1.0 A, P ≤ 15 W                                                                                                                                                                                               | V <sub>O</sub>                 | –4.75            | –                       | –5.25                 | Vdc   |
| Input Bias Current (T <sub>J</sub> = +25°C)                                                                                                                                                                                                                                                    | I <sub>IB</sub>                | –                | 4.3                     | 8.0                   | mA    |
| Input Bias Current Change<br>–7.0 Vdc ≥ V <sub>I</sub> ≥ –25 Vdc<br>5.0 mA ≤ I <sub>O</sub> ≤ 1.5 A                                                                                                                                                                                            | ΔI <sub>IB</sub>               | –<br>–           | –<br>–                  | 1.3<br>0.5            | mA    |
| Output Noise Voltage (T <sub>A</sub> = +25°C, 10 Hz ≤ f ≤ 100 kHz)                                                                                                                                                                                                                             | V <sub>n</sub>                 | –                | 40                      | –                     | μV    |
| Ripple Rejection (I <sub>O</sub> = 20 mA, f = 120 Hz)                                                                                                                                                                                                                                          | RR                             | –                | 70                      | –                     | dB    |
| Dropout Voltage<br>I <sub>O</sub> = 1.0 A, T <sub>J</sub> = +25°C                                                                                                                                                                                                                              | V <sub>I</sub> –V <sub>O</sub> | –                | 1.3                     | –                     | Vdc   |
| Average Temperature Coefficient of Output Voltage<br>I <sub>O</sub> = 5.0 mA, T <sub>low</sub> * ≤ T <sub>J</sub> ≤ +125°C                                                                                                                                                                     | ΔV <sub>O</sub> /ΔT            | –                | –1.0                    | –                     | mV/°C |

1. Load and line regulation are specified at constant junction temperature. Changes in V<sub>O</sub> due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

\*T<sub>low</sub> = –40°C for MC7905B and T<sub>low</sub> = 0°C for MC7905C.

## MC7900 Series

### MC7905AC

**ELECTRICAL CHARACTERISTICS** ( $V_I = -10\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $0^\circ\text{C} < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                                                           | Symbol                     | Min              | Typ                      | Max                  | Unit                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|--------------------------|----------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                              | $V_O$                      | -4.9             | -5.0                     | -5.1                 | Vdc                  |
| Line Regulation (Note 2)<br>-8.0 Vdc $\geq V_I \geq -12\text{ Vdc}$ ; $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$<br>-8.0 Vdc $\geq V_I \geq -12\text{ Vdc}$ ; $I_O = 1.0\text{ A}$<br>-7.5 Vdc $\geq V_I \geq -25\text{ Vdc}$ ; $I_O = 500\text{ mA}$<br>-7.0 Vdc $\geq V_I \geq -20\text{ Vdc}$ ; $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ | $\text{Reg}_{\text{line}}$ | -<br>-<br>-<br>- | 2.0<br>7.0<br>7.0<br>6.0 | 25<br>50<br>50<br>50 | mV                   |
| Load Regulation (Note 2)<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$ , $T_J = +25^\circ\text{C}$<br>250 mA $\leq I_O \leq 750\text{ mA}$<br>5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                                                                                                                                                | $\text{Reg}_{\text{load}}$ | -<br>-<br>-      | 11<br>4.0<br>9.0         | 100<br>50<br>100     | mV                   |
| Output Voltage<br>-7.5 Vdc $\geq V_I \geq -20\text{ Vdc}$ , 5.0 mA $\leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                                                    | $V_O$                      | -4.80            | -                        | -5.20                | Vdc                  |
| Input Bias Current                                                                                                                                                                                                                                                                                                                                        | $I_{IB}$                   | -                | 4.4                      | 8.0                  | mA                   |
| Input Bias Current Change<br>-7.5 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>5.0 mA $\leq I_O \leq 1.0\text{ A}$<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$ , $T_J = +25^\circ\text{C}$                                                                                                                                                                            | $\Delta I_{IB}$            | -<br>-<br>-      | -<br>-<br>-              | 1.3<br>0.5<br>0.5    | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , 10 Hz $\leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                                                   | $V_n$                      | -                | 40                       | -                    | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = \text{mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                                                              | RR                         | -                | 70                       | -                    | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                      | $V_I - V_O$                | -                | 1.3                      | -                    | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ A}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                                                            | $\Delta V_O / \Delta T$    | -                | -1.0                     | -                    | mV/ $^\circ\text{C}$ |

### MC7905.2C

**ELECTRICAL CHARACTERISTICS** ( $V_I = -10\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $0^\circ\text{C} < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                        | Symbol                     | Min              | Typ                     | Max                   | Unit                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|-------------------------|-----------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                           | $V_O$                      | -5.0             | -5.2                    | -5.4                  | Vdc                  |
| Line Regulation (Note 2)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-7.2 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>-8.0 Vdc $\geq V_I \geq -12\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-7.2 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>-8.0 Vdc $\geq V_I \geq -12\text{ Vdc}$ | $\text{Reg}_{\text{line}}$ | -<br>-<br>-<br>- | 8.0<br>2.2<br>37<br>8.5 | 52<br>27<br>105<br>52 | mV                   |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 2)<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$<br>250 mA $\leq I_O \leq 750\text{ mA}$                                                                                                                                                                                     | $\text{Reg}_{\text{load}}$ | -<br>-           | 12<br>4.5               | 105<br>52             | mV                   |
| Output Voltage<br>-7.2 Vdc $\geq V_I \geq -20\text{ Vdc}$ , 5.0 mA $\leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                 | $V_O$                      | -4.95            | -                       | -5.45                 | Vdc                  |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $I_{IB}$                   | -                | 4.3                     | 8.0                   | mA                   |
| Input Bias Current Change<br>-7.2 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                            | $\Delta I_{IB}$            | -<br>-           | -<br>-                  | 1.3<br>0.5            | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , 10 Hz $\leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                | $V_n$                      | -                | 42                      | -                     | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                        | RR                         | -                | 68                      | -                     | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                   | $V_I - V_O$                | -                | 1.3                     | -                     | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                        | $\Delta V_O / \Delta T$    | -                | -1.0                    | -                     | mV/ $^\circ\text{C}$ |

2. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## MC7900 Series

### MC7906C

**ELECTRICAL CHARACTERISTICS** ( $V_I = -11\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $0^\circ\text{C} < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                        | Symbol                     | Min              | Typ                    | Max                   | Unit                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|------------------------|-----------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                           | $V_O$                      | -5.75            | -6.0                   | -6.25                 | Vdc                  |
| Line Regulation (Note 3)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-8.0 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>-9.0 Vdc $\geq V_I \geq -13\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-8.0 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>-9.0 Vdc $\geq V_I \geq -13\text{ Vdc}$ | $\text{Reg}_{\text{line}}$ | -<br>-<br>-<br>- | 9.0<br>3.0<br>43<br>10 | 60<br>30<br>120<br>60 | mV                   |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 3)<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$<br>250 mA $\leq I_O \leq 750\text{ mA}$                                                                                                                                                                                     | $\text{Reg}_{\text{load}}$ | -<br>-           | 13<br>5.0              | 120<br>60             | mV                   |
| Output Voltage<br>-8.0 Vdc $\geq V_I \geq -21\text{ Vdc}$ , 5.0 mA $\leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                 | $V_O$                      | -5.7             | -                      | -6.3                  | Vdc                  |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $I_{IB}$                   | -                | 4.3                    | 8.0                   | mA                   |
| Input Bias Current Change<br>-8.0 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                            | $\Delta I_{IB}$            | -<br>-           | -<br>-                 | 1.3<br>0.5            | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , 10 Hz $\leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                | $V_n$                      | -                | 45                     | -                     | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                        | RR                         | -                | 65                     | -                     | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                   | $V_I - V_O$                | -                | 1.3                    | -                     | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ A}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                         | $\Delta V_O / \Delta T$    | -                | -1.0                   | -                     | mV/ $^\circ\text{C}$ |

### MC7908C

**ELECTRICAL CHARACTERISTICS** ( $V_I = -14\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $0^\circ\text{C} < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                        | Symbol                     | Min              | Typ                   | Max                   | Unit                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|-----------------------|-----------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                           | $V_O$                      | -7.7             | -8.0                  | -8.3                  | Vdc                  |
| Line Regulation (Note 3)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-10.5 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>-11 Vdc $\geq V_I \geq -17\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-10.5 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>-11 Vdc $\geq V_I \geq -17\text{ Vdc}$ | $\text{Reg}_{\text{line}}$ | -<br>-<br>-<br>- | 12<br>5.0<br>50<br>22 | 80<br>40<br>160<br>80 | mV                   |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 3)<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$<br>250 mA $\leq I_O \leq 750\text{ mA}$                                                                                                                                                                                     | $\text{Reg}_{\text{load}}$ | -<br>-           | 26<br>9.0             | 160<br>80             | mV                   |
| Output Voltage<br>-10.5 Vdc $\geq V_I \geq -23\text{ Vdc}$ , 5.0 mA $\leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                | $V_O$                      | -7.6             | -                     | -8.4                  | Vdc                  |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $I_{IB}$                   | -                | 4.3                   | 8.0                   | mA                   |
| Input Bias Current Change<br>-10.5 Vdc $\geq V_I \geq -25\text{ Vdc}$<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                           | $\Delta I_{IB}$            | -<br>-           | -<br>-                | 1.0<br>0.5            | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , 10 Hz $\leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                | $V_n$                      | -                | 52                    | -                     | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                        | RR                         | -                | 62                    | -                     | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                   | $V_I - V_O$                | -                | 1.3                   | -                     | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                        | $\Delta V_O / \Delta T$    | -                | -1.0                  | -                     | mV/ $^\circ\text{C}$ |

3. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

## MC7900 Series

### MC7912B, MC7912C

**ELECTRICAL CHARACTERISTICS** ( $V_I = -19\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_{low}^* < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                        | Symbol                  | Min              | Typ                   | Max                     | Unit                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------|-----------------------|-------------------------|----------------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                           | $V_O$                   | -11.5            | -12                   | -12.5                   | Vdc                        |
| Line Regulation (Note 4)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-14.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>-16 Vdc $\geq V_I \geq -22\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-14.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>-16 Vdc $\geq V_I \geq -22\text{ Vdc}$ | $\text{Reg}_{line}$     | -<br>-<br>-<br>- | 13<br>6.0<br>55<br>24 | 120<br>60<br>240<br>120 | mV                         |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 4)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                                                                                                                                       | $\text{Reg}_{load}$     | -<br>-           | 46<br>17              | 240<br>120              | mV                         |
| Output Voltage<br>-14.5 Vdc $\geq V_I \geq -27\text{ Vdc}$ , $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                         | $V_O$                   | -11.4            | -                     | -12.6                   | Vdc                        |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $I_{IB}$                | -                | 4.4                   | 8.0                     | mA                         |
| Input Bias Current Change<br>-14.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                    | $\Delta I_{IB}$         | -<br>-           | -<br>-                | 1.0<br>0.5              | mA                         |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                         | $V_n$                   | -                | 75                    | -                       | $\mu\text{V}$              |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                        | RR                      | -                | 61                    | -                       | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                   | $V_I - V_O$             | -                | 1.3                   | -                       | Vdc                        |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ mA}$ , $T_{low}^* \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                              | $\Delta V_O / \Delta T$ | -                | -1.0                  | -                       | $\text{mV}/^\circ\text{C}$ |

### MC7912AC

**ELECTRICAL CHARACTERISTICS** ( $V_I = -19\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_{low}^* < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                                                           | Symbol                  | Min              | Typ                   | Max                     | Unit                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------|-----------------------|-------------------------|----------------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                              | $V_O$                   | -11.75           | -12                   | -12.25                  | Vdc                        |
| Line Regulation (Note 4)<br>-16 Vdc $\geq V_I \geq -22\text{ Vdc}$ ; $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$<br>-16 Vdc $\geq V_I \geq -22\text{ Vdc}$ ; $I_O = 1.0\text{ A}$<br>-14.8 Vdc $\geq V_I \geq -30\text{ Vdc}$ ; $I_O = 500\text{ mA}$<br>-14.5 Vdc $\geq V_I \geq -27\text{ Vdc}$ ; $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ | $\text{Reg}_{line}$     | -<br>-<br>-<br>- | 6.0<br>24<br>24<br>13 | 60<br>120<br>120<br>120 | mV                         |
| Load Regulation (Note 4)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = +25^\circ\text{C}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$                                                                                                                                                           | $\text{Reg}_{load}$     | -<br>-<br>-      | 46<br>17<br>35        | 150<br>75<br>150        | mV                         |
| Output Voltage<br>-14.8 Vdc $\geq V_I \geq -27\text{ Vdc}$ , $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                                            | $V_O$                   | -11.5            | -                     | -12.5                   | Vdc                        |
| Input Bias Current                                                                                                                                                                                                                                                                                                                                        | $I_{IB}$                | -                | 4.4                   | 8.0                     | mA                         |
| Input Bias Current Change<br>-15 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>$5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$ , $T_J = +25^\circ\text{C}$                                                                                                                                                               | $\Delta I_{IB}$         | -<br>-<br>-      | -<br>-<br>-           | 0.8<br>0.5<br>0.5       | mA                         |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                                            | $V_n$                   | -                | 75                    | -                       | $\mu\text{V}$              |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                                                           | RR                      | -                | 61                    | -                       | dB                         |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                      | $V_I - V_O$             | -                | 1.3                   | -                       | Vdc                        |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ A}$ , $T_{low}^* \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                                                                  | $\Delta V_O / \Delta T$ | -                | -1.0                  | -                       | $\text{mV}/^\circ\text{C}$ |

4. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

\* $T_{low} = -40^\circ\text{C}$  for MC7912B and  $T_{low} = 0^\circ\text{C}$  for MC7912C.

## MC7900 Series

### MC7915B, MC7915C

**ELECTRICAL CHARACTERISTICS** ( $V_I = -23\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_{low}^* < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                        | Symbol                  | Min              | Typ                   | Max                     | Unit                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------|-----------------------|-------------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                           | $V_O$                   | -14.4            | -15                   | -15.6                   | Vdc                  |
| Line Regulation (Note 5)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-17.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>-20 Vdc $\geq V_I \geq -26\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-17.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>-20 Vdc $\geq V_I \geq -26\text{ Vdc}$ | $\text{Reg}_{line}$     | -<br>-<br>-<br>- | 14<br>6.0<br>57<br>27 | 150<br>75<br>300<br>150 | mV                   |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 5)<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$<br>250 mA $\leq I_O \leq 750\text{ mA}$                                                                                                                                                                                     | $\text{Reg}_{load}$     | -<br>-           | 68<br>25              | 300<br>150              | mV                   |
| Output Voltage<br>-17.5 Vdc $\geq V_I \geq -30\text{ Vdc}$ , 5.0 mA $\leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                | $V_O$                   | -14.25           | -                     | -15.75                  | Vdc                  |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $I_{IB}$                | -                | 4.4                   | 8.0                     | mA                   |
| Input Bias Current Change<br>-17.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                           | $\Delta I_{IB}$         | -<br>-           | -<br>-                | 1.0<br>0.5              | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , 10 Hz $\leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                | $V_n$                   | -                | 90                    | -                       | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                        | RR                      | -                | 60                    | -                       | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                   | $V_I - V_O$             | -                | 1.3                   | -                       | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ A}$ , $T_{low}^* \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                               | $\Delta V_O / \Delta T$ | -                | -1.0                  | -                       | mV/ $^\circ\text{C}$ |

### MC7915AC

**ELECTRICAL CHARACTERISTICS** ( $V_I = -23\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_{low}^* < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                                                             | Symbol                  | Min              | Typ                  | Max                     | Unit                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------|----------------------|-------------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                                                | $V_O$                   | -14.7            | -15                  | -15.3                   | Vdc                  |
| Line Regulation (Note 5)<br>-20 Vdc $\geq V_I \geq -26\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$<br>-20 Vdc $\geq V_I \geq -26\text{ Vdc}$ , $I_O = 1.0\text{ A}$ ,<br>-17.9 Vdc $\geq V_I \geq -30\text{ Vdc}$ , $I_O = 500\text{ mA}$<br>-17.5 Vdc $\geq V_I \geq -30\text{ Vdc}$ , $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ | $\text{Reg}_{line}$     | -<br>-<br>-<br>- | 27<br>57<br>57<br>57 | 75<br>150<br>150<br>150 | mV                   |
| Load Regulation (Note 5)<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$ , $T_J = +25^\circ\text{C}$<br>250 mA $\leq I_O \leq 750\text{ mA}$<br>5.0 mA $\leq I_O \leq 1.0\text{ A}$                                                                                                                                                                                  | $\text{Reg}_{load}$     | -<br>-<br>-      | 68<br>25<br>40       | 150<br>75<br>150        | mV                   |
| Output Voltage<br>-17.9 Vdc $\geq V_I \geq -30\text{ Vdc}$ , 5.0 mA $\leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                                                                     | $V_O$                   | -14.4            | -                    | -15.6                   | Vdc                  |
| Input Bias Current                                                                                                                                                                                                                                                                                                                                          | $I_{IB}$                | -                | 4.4                  | 8.0                     | mA                   |
| Input Bias Current Change<br>-17.5 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>5.0 mA $\leq I_O \leq 1.0\text{ A}$<br>5.0 mA $\leq I_O \leq 1.5\text{ A}$ , $T_J = +25^\circ\text{C}$                                                                                                                                                                             | $\Delta I_{IB}$         | -<br>-<br>-      | -<br>-<br>-          | 0.8<br>0.5<br>0.5       | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , 10 Hz $\leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                                                                     | $V_n$                   | -                | 90                   | -                       | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                                                             | RR                      | -                | 60                   | -                       | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                                        | $V_I - V_O$             | -                | 1.3                  | -                       | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ mA}$ , $T_{low}^* \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                                                                   | $\Delta V_O / \Delta T$ | -                | -1.0                 | -                       | mV/ $^\circ\text{C}$ |

5. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

\* $T_{low} = -40^\circ\text{C}$  for MC7915B and  $T_{low} = 0^\circ\text{C}$  for MC7915C.

## MC7900 Series

### MC7918C

**ELECTRICAL CHARACTERISTICS** ( $V_I = -27\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $0^\circ\text{C} < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                    | Symbol                     | Min              | Typ                  | Max                     | Unit                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|----------------------|-------------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $V_O$                      | -17.3            | -18                  | -18.7                   | Vdc                  |
| Line Regulation (Note 6)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-21 Vdc $\geq V_I \geq -33\text{ Vdc}$<br>-24 Vdc $\geq V_I \geq -30\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-21 Vdc $\geq V_I \geq -33\text{ Vdc}$<br>-24 Vdc $\geq V_I \geq -30\text{ Vdc}$ | $\text{Reg}_{\text{line}}$ | -<br>-<br>-<br>- | 25<br>10<br>90<br>50 | 180<br>90<br>360<br>180 | mV                   |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 6)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                                                                                                                                   | $\text{Reg}_{\text{load}}$ | -<br>-           | 110<br>55            | 360<br>180              | mV                   |
| Output Voltage<br>-21 Vdc $\geq V_I \geq -33\text{ Vdc}$ , $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                       | $V_O$                      | -17.1            | -                    | -18.9                   | Vdc                  |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                   | $I_{IB}$                   | -                | 4.5                  | 8.0                     | mA                   |
| Input Bias Current Change<br>-21 Vdc $\geq V_I \geq -33\text{ Vdc}$<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                  | $\Delta I_{IB}$            | -<br>-           | -<br>-               | 1.0<br>0.5              | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                     | $V_n$                      | -                | 110                  | -                       | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                    | RR                         | -                | 59                   | -                       | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                               | $V_I - V_O$                | -                | 1.3                  | -                       | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                    | $\Delta V_O / \Delta T$    | -                | -1.0                 | -                       | mV/ $^\circ\text{C}$ |

### MC7924B, MC7924C


**ELECTRICAL CHARACTERISTICS** ( $V_I = -33\text{ V}$ ,  $I_O = 500\text{ mA}$ ,  $T_{\text{low}}^* < T_J < +125^\circ\text{C}$ , unless otherwise noted.)

| Characteristics                                                                                                                                                                                                                                                                                                    | Symbol                     | Min              | Typ                   | Max                      | Unit                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------|-----------------------|--------------------------|----------------------|
| Output Voltage ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                       | $V_O$                      | -23              | -24                   | -25                      | Vdc                  |
| Line Regulation (Note 6)<br>( $T_J = +25^\circ\text{C}$ , $I_O = 100\text{ mA}$ )<br>-27 Vdc $\geq V_I \geq -38\text{ Vdc}$<br>-30 Vdc $\geq V_I \geq -36\text{ Vdc}$<br>( $T_J = +25^\circ\text{C}$ , $I_O = 500\text{ mA}$ )<br>-27 Vdc $\geq V_I \geq -38\text{ Vdc}$<br>-30 Vdc $\geq V_I \geq -36\text{ Vdc}$ | $\text{Reg}_{\text{line}}$ | -<br>-<br>-<br>- | 31<br>14<br>118<br>70 | 240<br>120<br>470<br>240 | mV                   |
| Load Regulation, $T_J = +25^\circ\text{C}$ (Note 6)<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$<br>$250\text{ mA} \leq I_O \leq 750\text{ mA}$                                                                                                                                                                   | $\text{Reg}_{\text{load}}$ | -<br>-           | 150<br>85             | 480<br>240               | mV                   |
| Output Voltage<br>-27 Vdc $\geq V_I \geq -38\text{ Vdc}$ , $5.0\text{ mA} \leq I_O \leq 1.0\text{ A}$ , $P \leq 15\text{ W}$                                                                                                                                                                                       | $V_O$                      | -22.8            | -                     | -25.2                    | Vdc                  |
| Input Bias Current ( $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                                                   | $I_{IB}$                   | -                | 4.6                   | 8.0                      | mA                   |
| Input Bias Current Change<br>-27 Vdc $\geq V_I \geq -38\text{ Vdc}$<br>$5.0\text{ mA} \leq I_O \leq 1.5\text{ A}$                                                                                                                                                                                                  | $\Delta I_{IB}$            | -<br>-           | -<br>-                | 1.0<br>0.5               | mA                   |
| Output Noise Voltage ( $T_A = +25^\circ\text{C}$ , $10\text{ Hz} \leq f \leq 100\text{ kHz}$ )                                                                                                                                                                                                                     | $V_n$                      | -                | 170                   | -                        | $\mu\text{V}$        |
| Ripple Rejection ( $I_O = 20\text{ mA}$ , $f = 120\text{ Hz}$ )                                                                                                                                                                                                                                                    | RR                         | -                | 56                    | -                        | dB                   |
| Dropout Voltage ( $I_O = 1.0\text{ A}$ , $T_J = +25^\circ\text{C}$ )                                                                                                                                                                                                                                               | $V_I - V_O$                | -                | 1.3                   | -                        | Vdc                  |
| Average Temperature Coefficient of Output Voltage<br>$I_O = 5.0\text{ mA}$ , $T_{\text{low}}^* \leq T_J \leq +125^\circ\text{C}$                                                                                                                                                                                   | $\Delta V_O / \Delta T$    | -                | -1.0                  | -                        | mV/ $^\circ\text{C}$ |


6. Load and line regulation are specified at constant junction temperature. Changes in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

\* $T_{\text{low}} = -40^\circ\text{C}$  for MC7924B and  $T_{\text{low}} = 0^\circ\text{C}$  for MC7924C.


## MC7900 Series

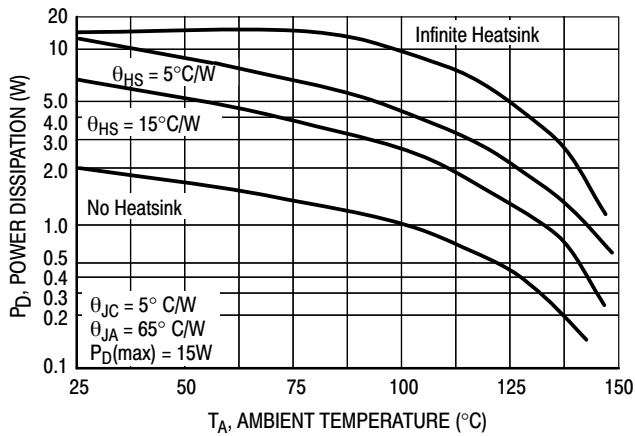


**Figure 2. Worst Case Power Dissipation as a Function of Ambient Temperature**

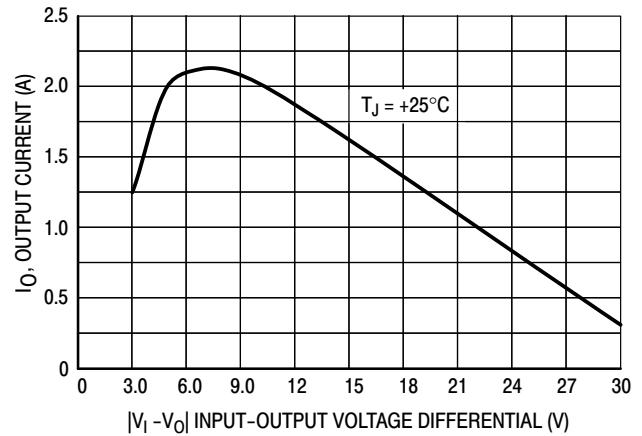


**Figure 3. Peak Output Current as a Function of Input-Output Differential Voltage**

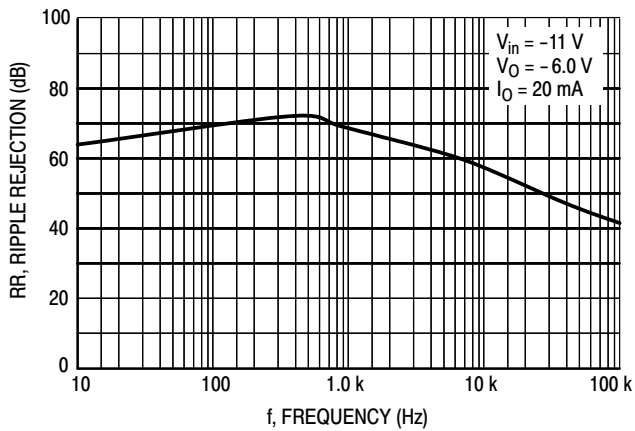


**Figure 4. Ripple Rejection as a Function of Frequency**

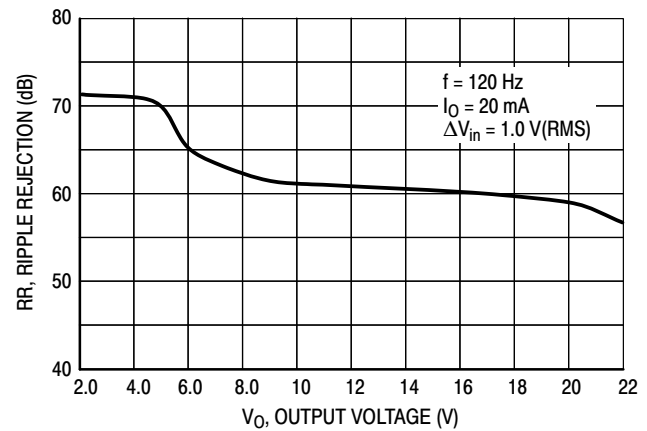

**Figure 5. Ripple Rejection as a Function of Output Voltage**

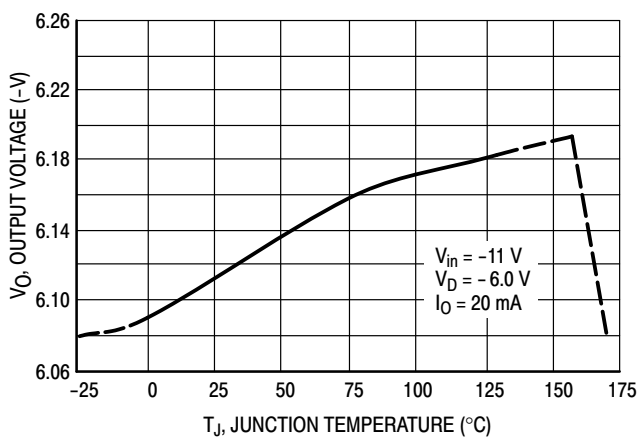

**Figure 6. Output Voltage as a Function of Junction Temperature**

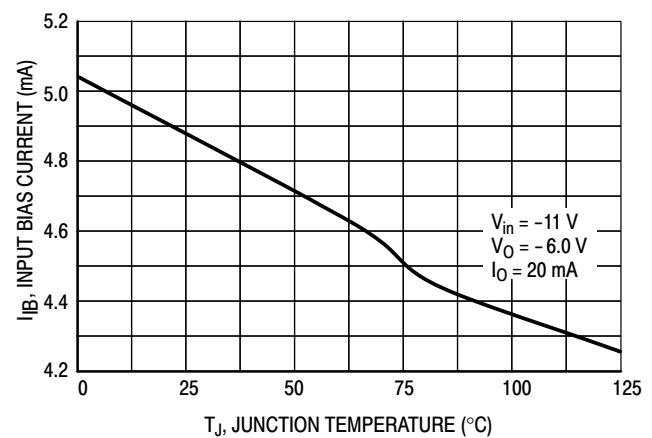


**Figure 7. Quiescent Current as a Function of Temperature**

The MC7900 Series of fixed voltage regulators are designed with Thermal overload Protection that shuts down the circuit when subjected to an excessive power overload condition. Internal Short Circuit Protection that limits the maximum current the circuit will pass, and Output Transistor Safe-Area Compensation that reduces the output short circuit current as the voltage across the pass transistor is increased.

The MC7905,  $-5.0\text{ V}$  regulator can be used as a constant current source when connected as above. The output current is the sum of resistor R current and quiescent bias current as follows:

The quiescent current for this regulator is typically 4.3 mA. The 5.0 V regulator was chosen to minimize dissipation and to allow the output voltage to operate to within 6.0 V below the input voltage.

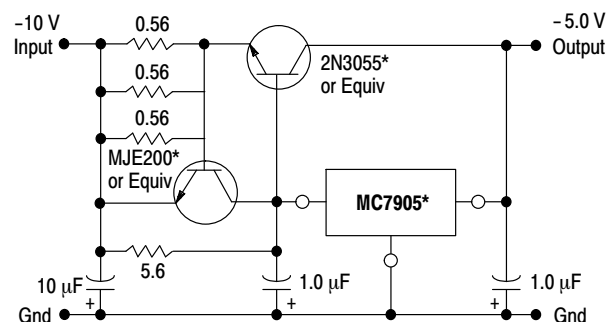

**Figure 9. Current Boost Regulator**  
–5.0 V @ 4.0 A, with 5.0 A Current Limiting)

The diagram shows a differential signal conditioner circuit. It consists of two identical signal paths, one for the positive input and one for the negative input. The positive path starts with a +20 V Input, followed by a 0.33  $\mu\text{F}$  capacitor to ground. The signal then passes through a 1.0  $\mu\text{F}$  capacitor to the non-inverting input of an MC7815 voltage regulator. The MC7815 is configured with its ground pin to ground and its output pin to a +15 V Output. A 1.0  $\mu\text{F}$  capacitor is connected between the output and ground. A clamp diode, labeled '1N4001G or Equiv', is connected in parallel with the output, with its cathode to the output and its anode to ground. The negative path is similar, but uses a -20 V Input and an MC7915 negative voltage regulator. The output of the negative path is a -15 V Output, also with a 1.0  $\mu\text{F}$  capacitor to ground and a clamp diode (1N4001G or Equiv) connected in parallel with its cathode to the output and its anode to ground. The final output is a differential signal between the +15 V Output and the -15 V Output.

The MC7815 and MC7915 positive and negative regulators may be connected as shown to obtain a dual power supply for operational amplifiers. A clamp diode should be used at the output of the MC7815 to prevent potential latch-up problems whenever the output of the positive regulator (MC7815) is drawn below ground with an output current greater than 200 mA.

## MC7900 Series

### Protection Diodes

When external capacitors are used with MC7900 series regulator it is sometimes necessary to add protection diodes to prevent the capacitors from discharging through low current points into the regulator or from output polarity reversals. Generally, no protection diode is required for values of output capacitance less than  $10\mu\text{F}$ . Figure 11 shows the MC7915 with the recommended protection diodes.

- Opposite Polarity Protection

Diode D1 protects the regulator from output polarity reversals during startup, power off and short-circuit operation.

- Reverse-bias Protection

Diode D2 prevents output capacitor from discharging through the MC7915 during an input short circuit or fast switch off of power supply.

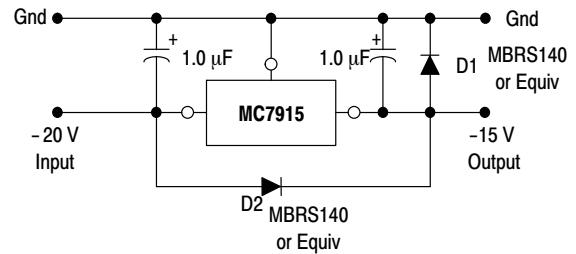


Figure 11. Protection Diodes

## DEFINITIONS

**Line Regulation** – The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

**Load Regulation** – The change in output voltage for a change in load current at constant chip temperature.

**Maximum Power Dissipation** – The maximum total device dissipation for which the regulator will operate within specifications.

**Input Bias Current** – That part of the input current that is not delivered to the load.

**Output Noise Voltage** – The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

**Long Term Stability** – Output voltage stability under accelerated life test conditions with the maximum rated voltage listed in the devices' electrical characteristics and maximum power dissipation.

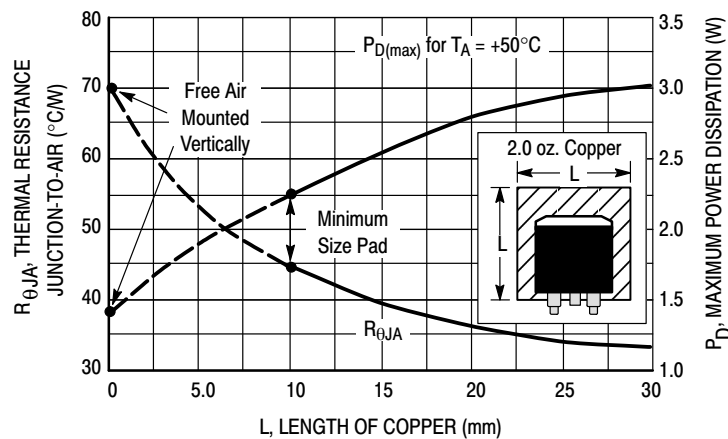


Figure 12. D<sup>2</sup>PAK Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

# MC7900 Series

## ORDERING INFORMATION

| Device         | Nominal Output Voltage | Output Voltage Tolerance | Package                      | Operating Temperature Range      | Shipping†       |
|----------------|------------------------|--------------------------|------------------------------|----------------------------------|-----------------|
| MC7905ACD2T    | -5.0 V                 | 2%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7905ACD2TG   |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7905ACD2TR4  |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7905ACD2TR4G |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7905ACT      |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7905ACTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7905BD2T     |                        | 4%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = -40°C to +125°C | 50 Units/Rail   |
| MC7905BD2TG    |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7905BD2TR4   |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7905BD2TR4G  |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7905BT       |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7905BTG      |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7905CD2T     |                        |                          | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7905CD2TG    |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7905CD2TR4   |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7905CD2TR4G  |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7905CT       |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7905CTG      |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7905.2CT     | -5.2 V                 | 4%                       | TO-220                       | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7905.2CTG    |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7906CD2T     | -6.0 V                 | 4%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7906CD2TG    |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7906CT       |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7906CTG      |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7908ACT      | -8.0 V                 | 2%                       | TO-220                       | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7908ACTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7908CD2T     |                        | 4%                       | D <sup>2</sup> PAK           |                                  | 50 Units/Rail   |
| MC7908CD2TG    |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7908CD2TR4   |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7908CD2TR4G  |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7908CT       |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7908CTG      |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |

## MC7900 Series

| Device         | Nominal Output Voltage | Output Voltage Tolerance | Package                      | Operating Temperature Range      | Shipping†       |
|----------------|------------------------|--------------------------|------------------------------|----------------------------------|-----------------|
| MC7912ACD2T    | -12 V                  | 2%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7912ACD2TG   |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7912ACD2TR4  |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7912ACD2TR4G |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7912ACT      |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7912ACTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7912BD2T     |                        | 4%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = -40°C to +125°C | 50 Units/Rail   |
| MC7912BD2TG    |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7912BD2TR4   |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7912BD2TR4G  |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7912BT       |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7912BTG      |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7912CD2T     |                        |                          | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7912CD2TG    |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7912CD2TR4   |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7912CD2TR4G  |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7912CT       |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7912CTG      |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |

## MC7900 Series


| Device        | Nominal Output Voltage | Output Voltage Tolerance | Package                      | Operating Temperature Range      | Shipping†       |
|---------------|------------------------|--------------------------|------------------------------|----------------------------------|-----------------|
| MC7915ACD2T   | – 15 V                 | 2%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7915ACD2TG  |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7915ACT     |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7915ACTG    |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7915BD2T    |                        | 4%                       | D <sup>2</sup> PAK           | T <sub>J</sub> = –40°C to +125°C | 50 Units/Rail   |
| MC7915BD2TG   |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7915BT      |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7915BTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7915BD2TR4G |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7915CD2T    |                        |                          | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7915CD2TG   |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7915CD2TR4  |                        |                          | D <sup>2</sup> PAK           |                                  | 800 Tape & Reel |
| MC7915CD2TR4G |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 800 Tape & Reel |
| MC7915CT      |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7915CTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7918CT      | – 18 V                 | 4%                       | TO-220                       | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7918CTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7924BT      | – 24 V                 | 4%                       | TO-220                       | T <sub>J</sub> = –40°C to +125°C | 50 Units/Rail   |
| MC7924BTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |
| MC7924CD2T    |                        |                          | D <sup>2</sup> PAK           | T <sub>J</sub> = 0°C to +125°C   | 50 Units/Rail   |
| MC7924CD2TG   |                        |                          | D <sup>2</sup> PAK (Pb-Free) |                                  | 50 Units/Rail   |
| MC7924CT      |                        |                          | TO-220                       |                                  | 50 Units/Rail   |
| MC7924CTG     |                        |                          | TO-220 (Pb-Free)             |                                  | 50 Units/Rail   |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


# MC7900 Series

## MARKING DIAGRAMS

TO-220  
T SUFFIX  
CASE 221AB

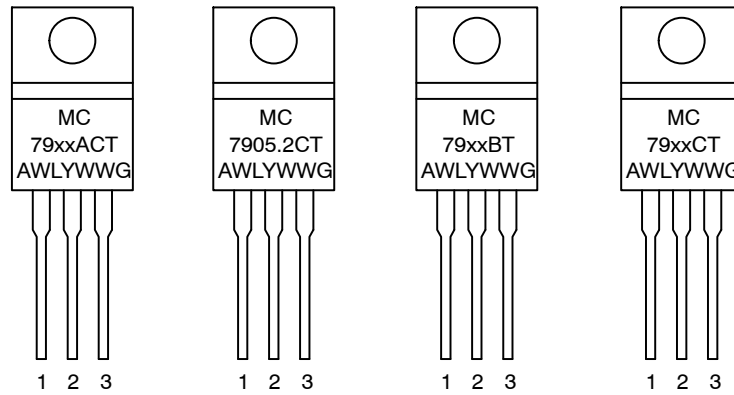

D<sup>2</sup>PAK  
D2T SUFFIX  
CASE 936

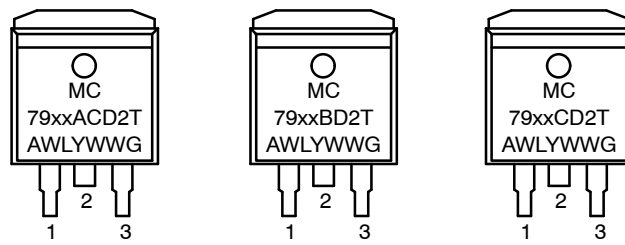


xx = Nominal Voltage  
A = Assembly Location  
WL = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Device



# MC7900 Series

## PACKAGE DIMENSIONS

### TO-220, SINGLE GAUGE T SUFFIX CASE 221AB ISSUE A

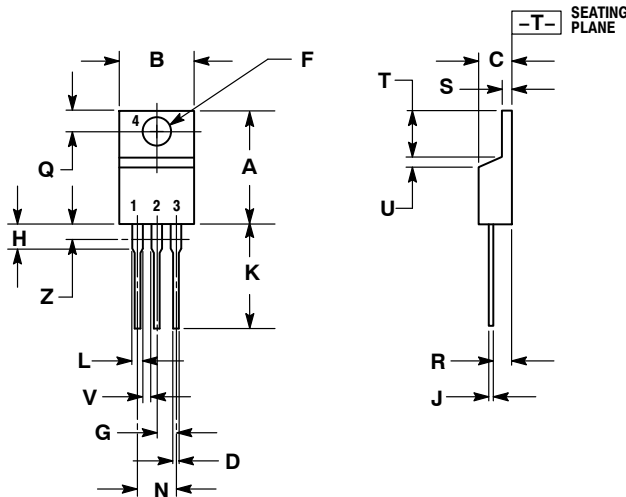

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.
4. PRODUCT SHIPPED PRIOR TO 2008 HAD DIMENSIONS  
S = 0.045 - 0.055 INCHES (1.143 - 1.397 MM)

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.570  | 0.620 | 14.48       | 15.75 |
| B   | 0.380  | 0.405 | 9.66        | 10.28 |
| C   | 0.160  | 0.190 | 4.07        | 4.82  |
| D   | 0.025  | 0.035 | 0.64        | 0.88  |
| F   | 0.142  | 0.147 | 3.61        | 3.73  |
| G   | 0.095  | 0.105 | 2.42        | 2.66  |
| H   | 0.110  | 0.155 | 2.80        | 3.93  |
| J   | 0.018  | 0.025 | 0.46        | 0.64  |
| K   | 0.500  | 0.562 | 12.70       | 14.27 |
| L   | 0.045  | 0.060 | 1.15        | 1.52  |
| N   | 0.190  | 0.210 | 4.83        | 5.33  |
| Q   | 0.100  | 0.120 | 2.54        | 3.04  |
| R   | 0.080  | 0.110 | 2.04        | 2.79  |
| S   | 0.020  | 0.024 | 0.508       | 0.61  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | ---   | 1.15        | ---   |
| Z   | ---    | 0.080 | ---         | 2.04  |

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

MC7900/D