



TMMH SERIES

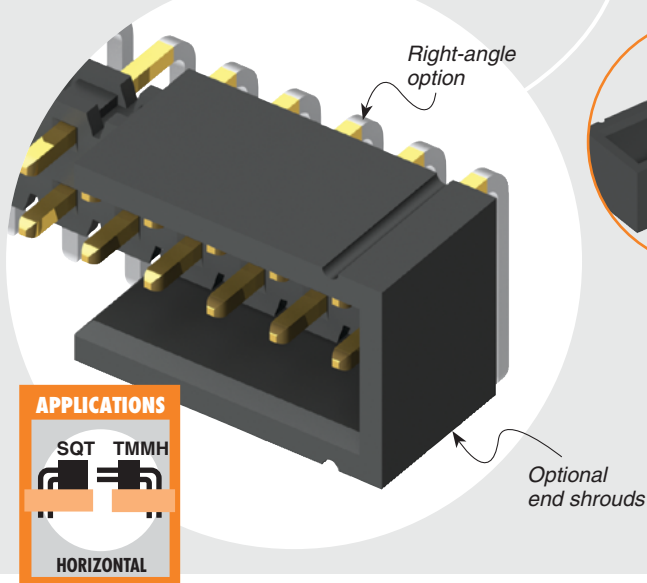

FLEX SHROUD OPTIONS

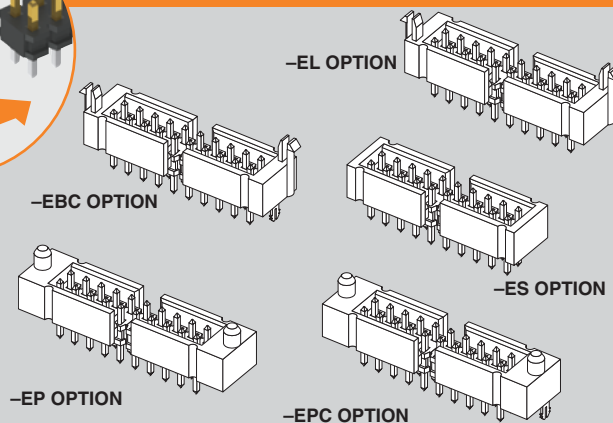


ROW OPTION


- D**
= Double Row
(Required for Flex Shroud option)
- T**
= Triple Row
- Q**
= Four Row
- 5**
= Five Row
- 6**
= Six Row

TAIL OPTION

- RA**
= Right-angle
(Double & Triple Row only)
(-ES, -EP, -EL Double Row only)
(-EC, -EBC and -EPC not available)
(-06 Lead style not available)

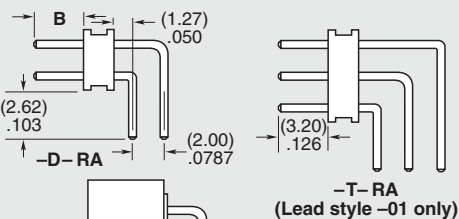

LEAD STYLE	D	E
-01	(2.34) .092	(6.60) .260
-04	(2.62) .103	(5.26) .207
-05	(3.12) .123	(5.26) .207

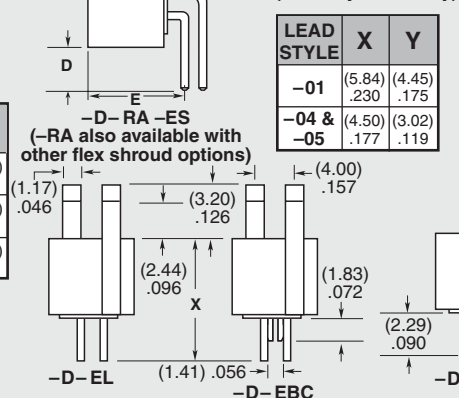


LEAD STYLE	X	Y
-01	(5.84) .230	(4.45) .175
-04 & -05	(4.50) .177	(3.02) .119

FLEX SHROUD OPTIONS


Flex Shroud requires -D row & 9 pins/row minimum
(For board-to-board interfaces. Will not mate with TCSD)

- ES**
= End Shroud
- EC**
= End Shroud with Locking Clip
(Manual placement required)
- EP**
= End Shroud with Guide Post
- EL**
= End Shroud with Board Lock
(Boards are positively locked and cannot be unmated)
- EBC**
= End Shroud with Board Lock and Locking Clip
(Boards are positively locked and cannot be unmated)
- EPC**
= End Shroud with Guide Post and Locking Clip
(Manual placement required)

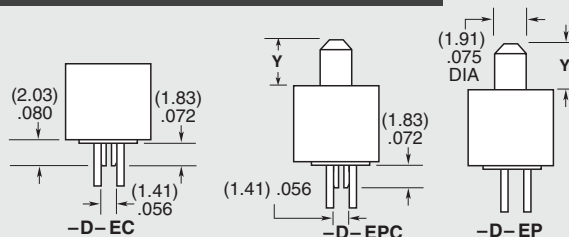

OTHER OPTIONS

- “XXX”**
= Polarized Position
(Specify position of omitted pin)
- RC**
= Retention Clip
(Mates to TCSD)
(Double row only, minimum position 4 and available only -06 lead style)



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.
Components must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.