


Functional Block Diagram

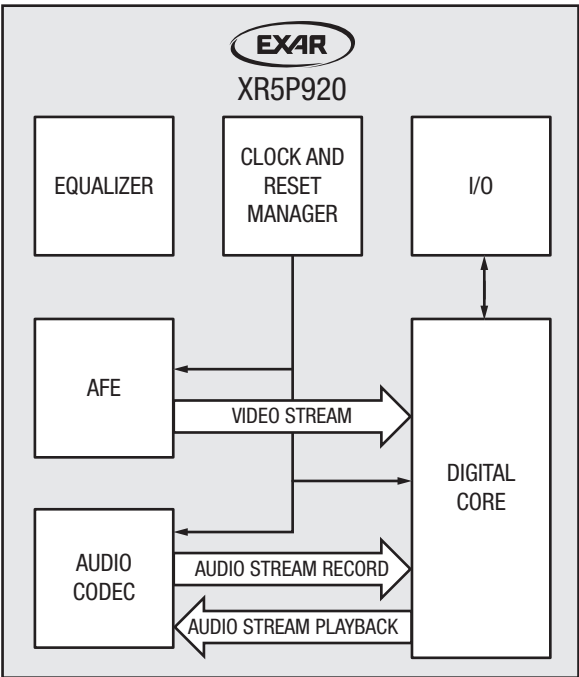

Ordering Information

Part Number	Operating Temperature Range	Environmental Rating	Package
XR5P920-F	0°C to 70°C	RoHS compliant and Green ⁽¹⁾	220-pin 11mm x 11mm LFBGA
EVK-XR5R921	Evaluation Kit, HDCVI PCIe card with XR5P920		

NOTE:
1. Visit www.exar.com for more information.

Please contact videotechsupport@exar.com to request a complete datasheet.



www.exar.com
48760 Kato Road
Fremont, CA 94538
USA
Tel.: +1 (510) 668-7000
Fax: +1 (510) 668-7001
Email: videotechsupport@exar.com

Exar Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. Exar Corporation conveys no license under any patent or other right and makes no representation that the circuits are free of patent infringement. While the information in this publication has been carefully checked, no responsibility, however, is assumed for inaccuracies.

Exar Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Exar Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of Exar Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of Exar Corporation is prohibited. Exar, XR and the XR logo are registered trademarks of Exar Corporation. All other trademarks are the property of their respective owners.