

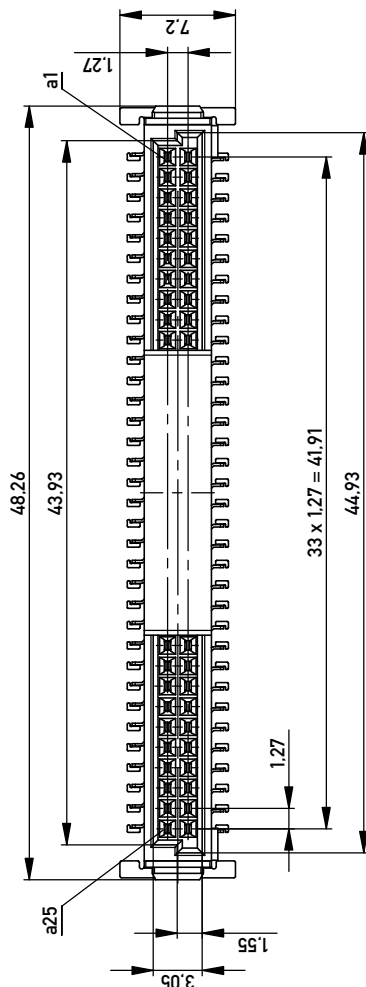
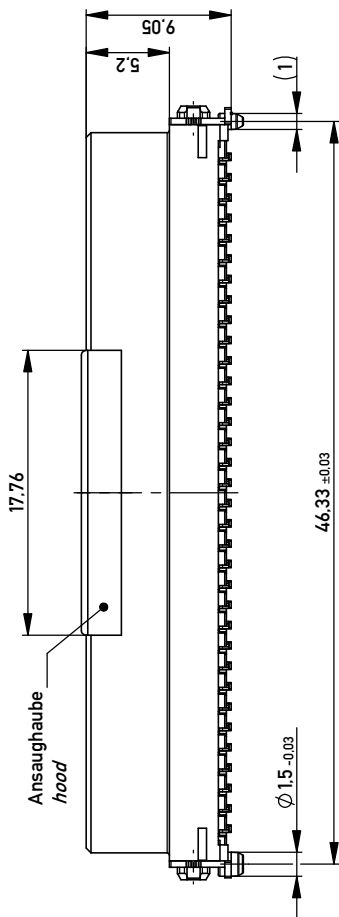
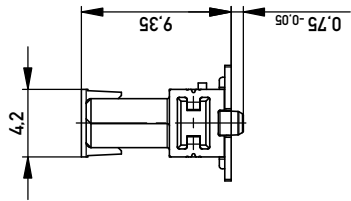



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

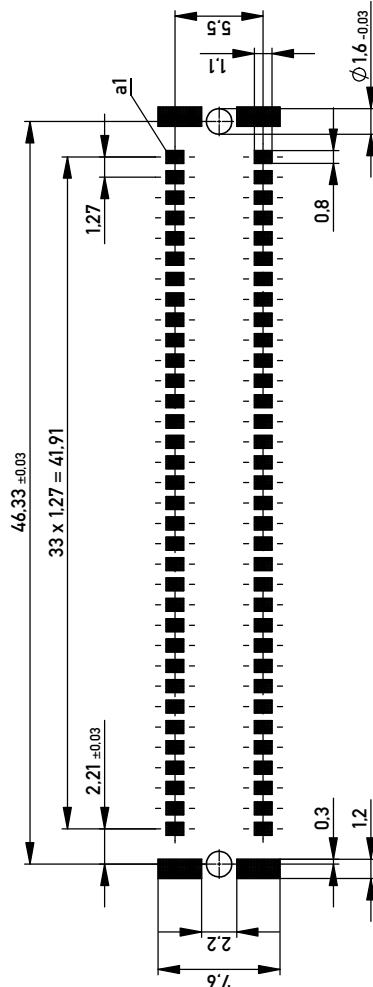

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs



Abspülrichtung - Reel off Direction

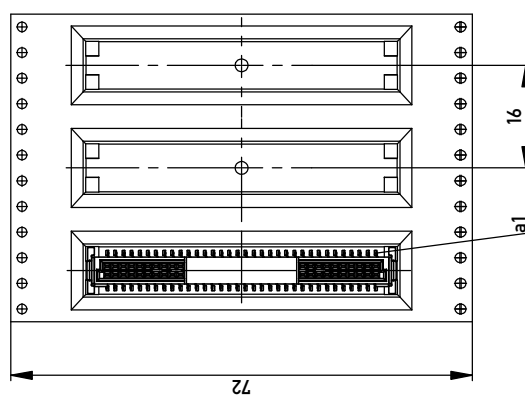

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

BA 7-03 - Standard Bauhöhe

type 7-03 - standard assembly height

Information:	Tolerances	Scale	Designation	Class	Index	Date	www.ERNI.com	154720	SMCB	A3
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	3:1	Federl. SMC-B 68-SMD-BA7-03 Female SMC-B 68-SMD-type7-03							
Copyright by ERNI GmbH Proprietary notice pursuant to ISO 16015 to be observed										