

AMERICAS

5810 Van Allen Way
Carlsbad, CA 92008
Telephone: 760-930-4600
Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX, UK
Telephone: 44 (1384) 842-211
Facsimile: 44 (1384) 843-355

ASIA


14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: 852-2176-3333
Facsimile: 852-2176-3888



Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
18-36 V	3.3 @ 2.5 A	76%	AEE02F24
18-36 V	5.0 @ 2.0 A	78%	AEE02A24
18-36 V	8.0 @ 1.25A	78%	AEE01L24 (EOL)
18-36 V	12.0 @ 0.84 A	82%	AEE00B24
18-36 V	15.0 @ 0.67 A	82%	AEE00C24
36-72 V	3.3 @ 2.5 A	77%	AEE02F48
36-72 V	5.0 @ 2.0 A	79%	AEE02A48
36-72 V	8.0 @ 1.25 A	77%	AEE01L48 (EOL)
36-72 V	12.0 @ 0.84 A	84%	AEE00B48
36-72 V	15.0 @ 0.67 A	86%	AEE00C48

Mechanical Dimensions and Pin Assignments

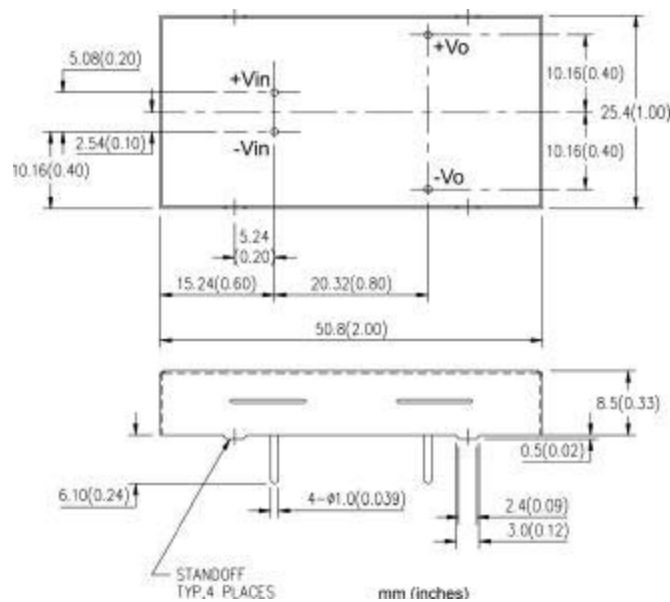

Notes:

1. 20 MHz bandwidth. An external 0.1 uf ceramic capacitor is recommended to be placed from +V out to comm.
2. All specifications are typical at nominal line, full load, and 25°C unless otherwise noted.
3. All specifications subject to change without notice.
4. Mechanical drawings are for reference only.