

ABSOLUTE MAXIMUM RATINGS

| Device Output Voltage | Input Voltage | Input Voltage (Transient)(Note 3) | Input Voltage Differential (Output Shorted to Ground) |
|-----------------------|---------------|-----------------------------------|---|
| 5V | 35V | 50V | 35V |
| 12V | 35V | 50V | 35V |
| 15V | 35V | 50V | 35V |

Operating Junction Temperature150°C

Storage Temperature Range-65°C to 150°C

Lead Temperature (Soldering 10 seconds)300°C

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

Note 3: Operation at high input voltages is dependent upon load current. When load current is less than 5mA, output will rise out of regulation as input-output differential increases beyond 30V. Note also from figure 1, that maximum load current is reduced at high voltages. The 50V input rating of the SG78xxA series refers to ability to withstand high line or transient conditions without damage. Since the regulator's maximum current capability is reduced, the output may fall out of regulation at high input voltages under nominal loading.

THERMAL DATA
K TO-3 3-Terminal Metal Can (Two pins and case)

| | |
|---|---------|
| THERMAL RESISTANCE-JUNCTION TO CASE, θ_{JC} | 3.0°C/W |
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 35°C/W |

T TO-39 3-Pin Metal Can

| | |
|---|---------|
| THERMAL RESISTANCE-JUNCTION TO CASE, θ_{JC} | 15°C/W |
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 120°C/W |

G TO-257 3-Pin Hermetic

| | |
|---|---------|
| THERMAL RESISTANCE-JUNCTION TO CASE, θ_{JC} | 3.5°C/W |
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 42°C/W |

IG TO-257 3-Pin Hermetic (Isolated)

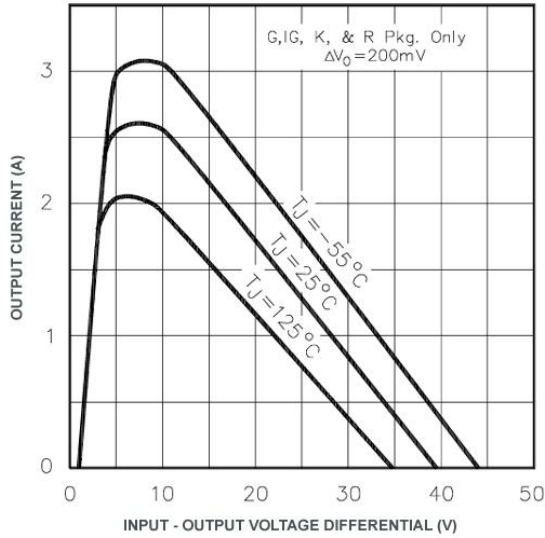
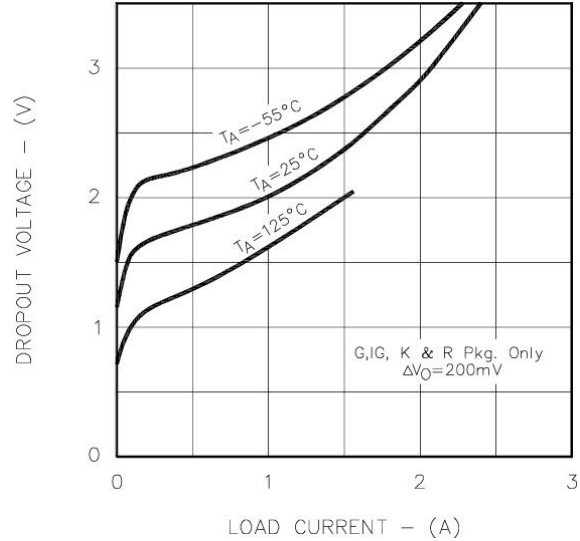
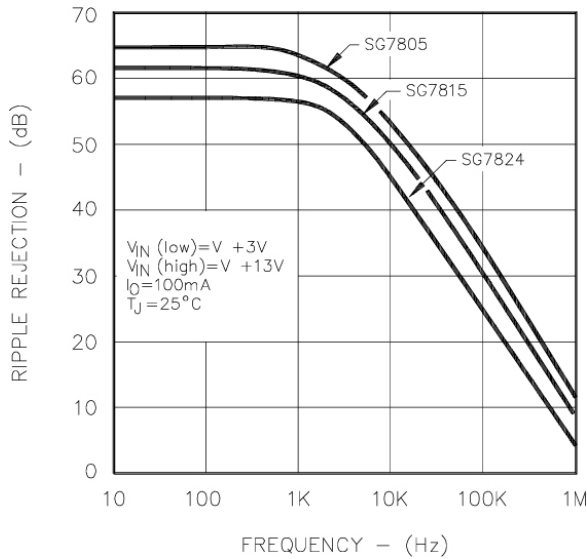
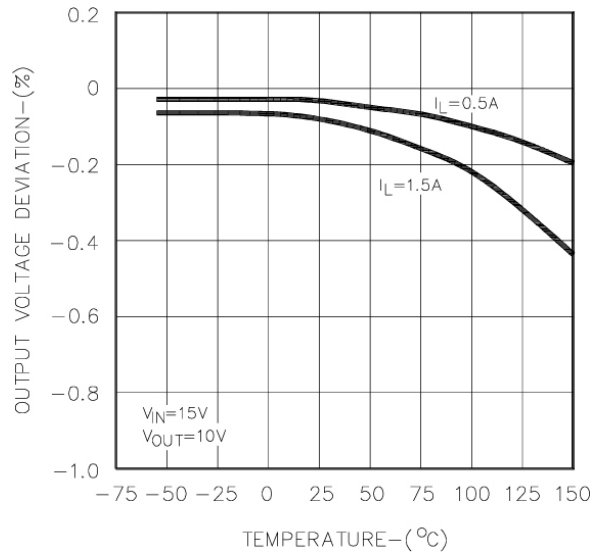
| | |
|---|---------|
| THERMAL RESISTANCE-JUNCTION TO CASE, θ_{JC} | 4.0°C/W |
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 42°C/W |

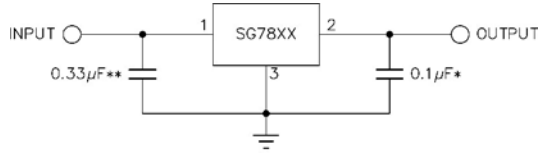
L Leadless Chip Carrier 20-Pin Ceramic

| | |
|---|---------|
| THERMAL RESISTANCE-JUNCTION TO CASE, θ_{JC} | 35°C/W |
| THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA} | 120°C/W |

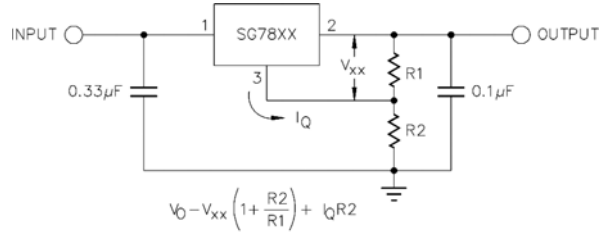
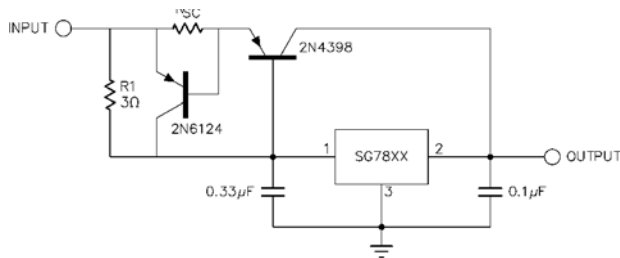
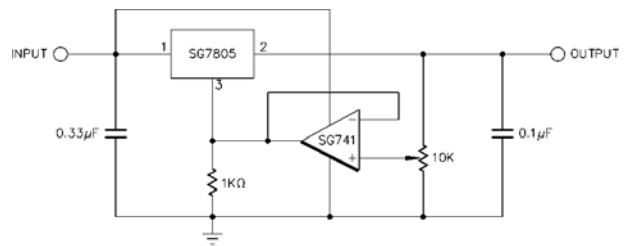
Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$.

The θ_{JA} numbers are guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

CHARACTERISTIC CURVES

Figure 1 – Peak Output Current vs. Input – Output Differential

Figure 2 – Minimum Input – Output Voltage vs. Load Current

Figure 3 – Ripple Rejection vs. Frequency

Figure 4 – Temperature Coefficient of Output Voltage

APPLICATIONS


- * INCREASING VALUE OF OUTPUT CAPACITOR IMPROVES SYSTEM TRANSIENT RESPONSE
- ** REQUIRED ONLY IF REGULATOR IS LOCATED AN APPRECIABLE DISTANCE FROM POWER SUPPLY FILTER

Figure 5 – Fixed Output Regulator

Figure 6 – Circuit for Increasing Output Voltage

Figure 7 – High Output Current, Short Circuit Protected

Figure 8 – Adjustable Output Regulator, 7V to 30V
RECOMMENDED OPERATING CONDITIONS

| Parameter | SG78xx / 78xxA | | | Units |
|---|----------------|-----|-----|-------|
| | Min | Typ | Max | |
| Operating Junction Temperature Range (Note 2) | 55 | | 150 | °C |

Note 2: Range over which the device is functional.

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, these specifications apply over the operating ambient temperatures for SG7805A / SG7805 with $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $V_{IN} = 10\text{V}$, $I_O = 500\text{mA}$ for the K, G and IG – Power Packages, $I_O = 100\text{mA}$ for the T and L packages, $C_{IN} = 0.33\mu\text{F}$, and $C_{OUT} = 0.1\mu\text{F}$. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.

| Parameter | Test Conditions | SG7805A | | | SG7805 | | | Units |
|--------------------------------|--|---------|------|------|--------|------|------|--------------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Output Voltage | $T_J = 25^{\circ}\text{C}$ | 4.92 | 5.00 | 5.08 | 4.80 | 5.00 | 5.20 | V |
| Line Regulation (Note 1) | $V_{IN} = 7.5\text{V to } 20\text{V}, T_J = 25^{\circ}\text{C}$ | | 5 | 25 | | 5 | 25 | mV |
| | $V_{IN} = 8\text{V to } 12\text{V}, T_J = 25^{\circ}\text{C}$ | | 2 | 12 | | 2 | 25 | mV |
| Load Regulation (Note 1) | Power Pkgs: $I_O = 5\text{mA to } 1.5\text{A}, T_J = 25^{\circ}\text{C}$ | | 15 | 50 | | 15 | 50 | mV |
| | $I_O = 250\text{mA to } 750\text{mA}, T_J = 25^{\circ}\text{C}$ | | 5 | 25 | | 5 | 25 | mV |
| | T – Pkg: $I_O = 5\text{mA to } 500\text{mA}, T_J = 250^{\circ}\text{C}$ | | 5 | 25 | | 20 | 25 | mV |
| Total Output Voltage Tolerance | $V_{IN} = 8\text{V to } 20\text{V}$ | | | | | | | |
| Quiescent Current | Power Pkgs: $I_O = 5\text{mA to } 1.0\text{A}, P \leq 20\text{W}$ | 4.85 | 5.00 | 5.15 | 4.65 | 5.00 | 5.35 | V |
| | T – Pkg: $I_O = 5\text{mA to } 500\text{mA}, P \leq 20\text{W}$ | 4.85 | 5.00 | 5.15 | 4.65 | 5.00 | 5.35 | V |
| Quiescent Current Change | Over Temperature Range | | | 7 | | | 7 | mA |
| | $T_J = 25^{\circ}\text{C}$ | | 4 | 6 | | 4 | 6 | mA |
| Dropout Voltage | With Line: $V_{IN} = 8\text{V to } 25\text{V}$ | | | 0.8 | | | 0.8 | mA |
| | With Load: $I_O = 5\text{mA to } 1.0\text{A}$ (Power Pkgs.) | | | 0.5 | | | 0.5 | mA |
| | $I_O = 5\text{mA to } 500\text{mA}$ (T) | | | 0.5 | | | 0.5 | mA |
| Ripple Rejection | $\Delta V_O = 100\text{mV}, T_J = 25^{\circ}\text{C}$ | | | | | | | |
| Peak Output Current | Power Pkgs: $I_O = 1.0\text{A}, \text{T-Pkg: } I_O = 500\text{mA}$ | | 2 | 2.5 | | 2 | 2.5 | V |
| | Power Pkgs: $V_{IN} = 10\text{V}, T_J = 25^{\circ}\text{C}$ | 1.5 | 2.0 | 3.3 | 1.5 | 2.0 | 3.3 | A |
| Short Circuit Current | T – Pkg: $V_{IN} = 10\text{V}, T_J = 25^{\circ}\text{C}$ | 0.5 | 1.0 | 2.0 | 0.5 | 1.0 | 2.0 | A |
| | Power Pkgs: $V_{IN} = 35\text{V}, T_J = 25^{\circ}\text{C}$ | | | 1.2 | | | 1.2 | A |
| Ripple Rejection | T – Pkg: $V_{IN} = 35\text{V}, T_J = 25^{\circ}\text{C}$ | | | 0.7 | | | 0.7 | A |
| | $\Delta V_{IN} = 10\text{V}, f = 120\text{Hz}, T_J = 25^{\circ}\text{C}$ | 68 | | | 68 | | | dB |
| Output Noise Voltage (rms) | $f = 10\text{Hz to } 100\text{kHz}$ (Note 2) | | | 40 | | | 40 | $\mu\text{V/V}$ |
| Long Term Stability | 1000 hours @ $T_J = 125^{\circ}\text{C}$ | | 20 | | | 20 | | mV |
| Thermal Shutdown | $I_O = 5\text{mA}$ | | 175 | | | 175 | | $^{\circ}\text{C}$ |

Note 1: All regulation tests are made at constant junction temperature with low duty cycle testing.
 Note 2: This test is guaranteed but is not tested in production.

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, these specifications apply over the operating ambient temperatures for SG7812A / SG7812 with $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $V_{IN} = 19\text{V}$, $I_O = 500\text{mA}$ for the K, G and IG – Power Packages, $I_O = 100\text{mA}$ for the T and L packages, $C_{IN} = 0.33\mu\text{F}$, and $C_{OUT} = 0.1\mu\text{F}$. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.

| Parameter | Test Conditions | SG7812A | | | SG7812 | | | Units |
|--------------------------------|--|---------|------|------|--------|------|------|--------------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Output Voltage | $T_J = 25^{\circ}\text{C}$ | 11.8 | 12.0 | 12.2 | 11.5 | 12.0 | 12.5 | V |
| Line Regulation (Note 1) | $V_{IN} = 14.5\text{V to } 30\text{V}$, $T_J = 25^{\circ}\text{C}$ | | 12 | 60 | | 12 | 120 | mV |
| | $V_{IN} = 16\text{V to } 22\text{V}$, $T_J = 25^{\circ}\text{C}$ | | 6 | 30 | | 6 | 60 | mV |
| Load Regulation (Note 1) | Power Pkgs: $I_O = 5\text{mA to } 1.5\text{A}$, $T_J = 25^{\circ}\text{C}$ | | 28 | 80 | | 28 | 120 | mV |
| | $I_O = 250\text{mA to } 750\text{mA}$, $T_J = 25^{\circ}\text{C}$ | | 10 | 40 | | 10 | 60 | mV |
| | T – Pkg: $I_O = 5\text{mA to } 500\text{mA}$, $T_J = 25^{\circ}\text{C}$ | | 10 | 40 | | 10 | 60 | mV |
| Total Output Voltage Tolerance | $V_{IN} = 15.5\text{V to } 27\text{V}$ | | | | | | | |
| Quiescent Current | Power Pkgs: $I_O = 5\text{mA to } 1.0\text{A}$, $P \leq 20\text{W}$ | 11.7 | 12.0 | 12.3 | 11.4 | 12.0 | 12.6 | V |
| | T – Pkg: $I_O = 5\text{mA to } 500\text{mA}$, $P \leq 2\text{W}$ | 11.7 | 12.0 | 12.3 | 11.4 | 12.0 | 12.6 | V |
| Quiescent Current Change | Over Temperature Range | | | 7 | | | 7 | mA |
| | $T_J = 25^{\circ}\text{C}$ | | 4 | 6 | | 4 | 6 | mA |
| Dropout Voltage | With Line: $V_{IN} = 15\text{V to } 30\text{V}$ | | | 0.8 | | | 0.8 | mA |
| | With Load: $I_O = 5\text{mA to } 1.0\text{A}$ (Power Pkgs.) | | | 0.5 | | | 0.5 | mA |
| | $I_O = 5\text{mA to } 500\text{mA}$ (T) | | | 0.5 | | | 0.5 | mA |
| Peak Output Current | $\Delta V_O = 100\text{mV}$, $T_J = 25^{\circ}\text{C}$ | | | | | | | |
| | Power Pkgs: $I_O = 1.0\text{A}$, T – Pkg: $I_O = 500\text{mA}$ | | 2 | 2.5 | | 2 | 2.5 | V |
| Short Circuit Current | Power Pkgs: $T_J = 25^{\circ}\text{C}$ | 1.5 | 2.0 | 3.3 | 1.5 | 2.0 | 3.3 | A |
| | T – Pkg: $T_J = 25^{\circ}\text{C}$ | 0.5 | 1.0 | 1.7 | 0.5 | 1.0 | 1.7 | A |
| Ripple Rejection | Power Pkgs: $V_{IN} = 35\text{V}$, $T_J = 25^{\circ}\text{C}$ | | | 1.2 | | | 1.2 | A |
| | T – Pkg: $V_{IN} = 35\text{V}$, $T_J = 25^{\circ}\text{C}$ | | | 0.7 | | | 0.7 | A |
| Output Noise Voltage (rms) | $\Delta V_{IN} = 10\text{V}$, $f = 120\text{Hz}$, $T_J = 25^{\circ}\text{C}$ | 61 | | | 61 | | | dB |
| Long Term Stability | $f = 10\text{Hz to } 100\text{kHz}$ (note 2) | | | 40 | | | 40 | $\mu\text{V/V}$ |
| Thermal Shutdown | 1000 hours @ $T_J = 125^{\circ}\text{C}$ | | 48 | | | 48 | | mV |
| | $I_O = 5\text{mA}$ | | 175 | | | 175 | | $^{\circ}\text{C}$ |

Note 1: All regulation tests are made at constant junction temperature with low duty cycle testing.
 Note 2: This test is guaranteed but is not tested in production.

ELECTRICAL CHARACTERISTICS

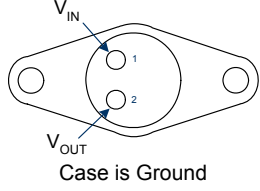


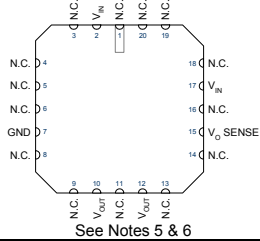

Unless otherwise specified, these specifications apply over the operating ambient temperatures for SG7815A / SG7815 with $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $V_{IN} = 23\text{V}$, $I_O = 500\text{mA}$ for the K, G and IG – Power Packages, $I_O = 100\text{mA}$ for the T and L packages, $C_{IN} = 0.33\mu\text{F}$, and $C_{OUT} = 0.1\mu\text{F}$. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.

| Parameter | Test Conditions | SG7815A | | | SG7815 | | | Units |
|--------------------------------|---|---------|------|------|--------|------|------|-----------------|
| | | Min | Typ | Max | Min | Typ | Max | |
| Output Voltage | $T_J = 25^{\circ}\text{C}$ | 14.8 | 15.0 | 15.2 | 14.4 | 15.0 | 15.6 | V |
| Line Regulation (Note 1) | $V_{IN} = 17.5\text{V to } 30\text{V}, T_J = 25^{\circ}\text{C}$ | | 15 | 75 | | 15 | 150 | mV |
| | $V_{IN} = 20\text{V to } 26\text{V}, T_J = 25^{\circ}\text{C}$ | | 8 | 40 | | 8 | 75 | mV |
| Load Regulation (Note 1) | Power Pkgs: $I_O = 5\text{mA to } 1.5\text{A}, T_J = 25^{\circ}\text{C}$ | | 30 | 100 | | 30 | 150 | mV |
| | $I_O = 250\text{mA to } 750\text{mA}, T_J = 25^{\circ}\text{C}$ | | 12 | 50 | | 12 | 75 | mV |
| | T – Pkg: $I_O = 5\text{mA to } 500\text{mA}, T_J = 25^{\circ}\text{C}$ | | 12 | 50 | | 12 | 75 | |
| Total Output Voltage Tolerance | $V_{IN} = 18.5\text{V to } 30\text{V}$ Power Pkgs: $I_O = 5\text{mA to } 1.0\text{A}, P \leq 20\text{W}$ T – Pkg: $I_O = 5\text{mA to } 500\text{mA}, P \leq 2\text{W}$ | 14.6 | 15.0 | 15.4 | 14.3 | 15.0 | 15.7 | V |
| Quiescent Current | Over Temperature Range | | | 7 | | | 7 | mA |
| | $T_J = 25^{\circ}\text{C}$ | | 4 | 6 | | 4 | 6 | mA |
| Quiescent Current Change | With Line: $V_{IN} = 18.5\text{V to } 30\text{V}$ | | | 0.8 | | | 0.8 | mA |
| | With Load: $I_O = 5\text{mA to } 1.0\text{A}$ (Power Pkgs) | | | 0.5 | | | 0.5 | mA |
| | $I_O = 5\text{mA to } 500\text{mA}$ (T) | | | 0.5 | | | 0.5 | mA |
| Dropout Voltage | $\Delta V_O = 100\text{mV}, T_J = 25^{\circ}\text{C}$ | | | | | | | |
| | Power Pkgs: $I_O = 1.0\text{A}$, T – Pkg: $I_O = 500\text{mA}$ | | 2 | 2.5 | | 2 | 2.5 | V |
| Peak Output Current | Power Pkgs: $T_J = 25^{\circ}\text{C}$ | 1.5 | 2.2 | 3.3 | 1.5 | 2.2 | 3.3 | A |
| | T – Pkg: $T_J = 25^{\circ}\text{C}$ | 0.5 | 0.9 | 1.7 | 0.5 | 0.9 | 1.7 | A |
| Short Circuit Current | Power Pkgs: $V_{IN} = 35\text{V}, T_J = 25^{\circ}\text{C}$ | | | 1.2 | | | 1.2 | A |
| | T – Pkg: $V_{IN} = 35\text{V}, T_J = 25^{\circ}\text{C}$ | | | 0.7 | | | 0.7 | A |
| Ripple Rejection | $\Delta V_{IN} = 10\text{V}, f = 120\text{Hz}, T_J = 25^{\circ}\text{C}$ | 60 | | | 60 | | | dB |
| Output Noise Voltage (rms) | $f = 10\text{Hz to } 100\text{kHz}$ (note 2) | | | 40 | | | 40 | $\mu\text{V/V}$ |
| Long Term Stability | 1000 hours @ $T_J = 125^{\circ}\text{C}$ | | 60 | | | 60 | | mV |
| Thermal Shutdown | $I_O = 5\text{mA}$ | | 175 | | | 175 | | |

Note 1: All regulation tests are made at constant junction temperature with low duty cycle testing.
 Note 2: This test is guaranteed but is not tested in production.

NOTES

CONNECTION DIAGRAMS & ORDERING INFORMATION (SEE NOTES BELOW)

| Package | Part No. | Ambient Temperature Range | Connection Diagram |
|--|----------------|---------------------------|--|
| 3-Terminal TO-3 Metal Can K – Package | SG78xxAK/883B | -55°C to 125°C |  |
| | SG7805AK/DESC | -55°C to 125°C | |
| | SG7812AK/DESC | -55°C to 125°C | |
| | SG7815AK/DESC | -55°C to 125°C | |
| | SG78xxAK | -55°C to 125°C | |
| | SG78xxK/883B | -55°C to 125°C | |
| | JAN7805K | -55°C to 125°C | |
| | JAN7812K | -55°C to 125°C | |
| 3-Pin TO-39 Metal Can T – Package | SG78xxAT/883B | -55°C to 125°C |  |
| | SG7805AT/DESC | -55°C to 125°C | |
| | SG7812AT/DESC | -55°C to 125°C | |
| | SG7815AT/DESC | -55°C to 125°C | |
| | SG78xxAT | -55°C to 125°C | |
| | SG78xxT/883B | -55°C to 125°C | |
| | JAN7805T | -55°C to 125°C | |
| | JAN7812T | -55°C to 125°C | |
| 3-Pin Hermetic TO-257 IG – Package (Isolated) | SG78xxAIG/883B | -55°C to 125°C |  |
| | SG7805AIG/DESC | -55°C to 125°C | |
| | SG7812AIG/DESC | -55°C to 125°C | |
| | SG7815AIG/DESC | -55°C to 125°C | |
| | SG78xxAIG | -55°C to 125°C | |
| | SG78xxIG/883B | -55°C to 125°C | |
| 20-Pin Ceramic Leadless Chip Carrier L – Package | SG7805AL/DESC | -55°C to 125°C |  <p>See Notes 5 & 6</p> |
| | SG7812AL/DESC | -55°C to 125°C | |
| | SG7815AL/DESC | -55°C to 125°C | |
| | SG78xxL/883B | -55°C to 125°C | |
| 3-Pin Hermetic TO-257 G – Package (Case is Ground) | SG78xxAG/883B | -55°C to 125°C |  |
| | SG7805AG/DESC | -55°C to 125°C | |
| | SG7812AG/DESC | -55°C to 125°C | |
| | SG7815AG/DESC | -55°C to 125°C | |
| | SG78xxAG | -55°C to 125°C | |
| | SG78xxG/883B | -55°C to 125°C | |

- Note
- 1: Contact factory for JAN and DESC product availability.
 - 2: All parts are viewed from the top.
 - 3: "xx" to be replaced by output voltage of specific fixed regulator.
 - 4: Some products will be available in hermetic flat pack (F). Consult factory for price and availability.
 - 5: Both inputs and outputs must be externally connected together at the device terminals.
 - 6: For normal operation, the V_O SENSE pin must be externally connected to the load.